INSPIRATION
LIGHTING

4

Pura 2019

INSPIRATION
LIGHTING

L'ARTE LUCE®

HARI

Composing light in space, adapting to the unique requirements of each environment, creating new atmosphere to each room-all this is about the new collection of floor lamps HARI.

HARI lamp is designed by design team. The collection combines advanced technology with superior functionality and sophisticated design. The HARI lamp can serve various functional requirements simultaneously, dining room lamp, living room ambient light, reading lamp and for work purposes. Diffuser profile accommodates a line of LEDs, the slim profile bestows a visual refinement while also providing a surprising level of illumination. Thanks to its special unique design, HARI can match a lot of interior design requirement.

reddot award 2019
winner lighting design

SMART HOME

Smart home technology can help your home run more efficiently while helping family live in total comfort.
Lighting control system is employed to maximize energy savings.
With the help of user friendly application light could be switched on/off by one finger touch.
We use most advanced solution wireless ZigBee protocol.

SYMBOLS

CE	Complies with the European standard EN 60598-1
III	CLASS III-Devices powered by safe voltage under 50V
W W	Device suitable for use in furniture
F	Device suitable for mounting on normal flammable surfaces
	Correct disposal of this product (waste electrical & electronical equipment)
	Device can withstand weight up to Kg/cm²...
	Walk over device
mm	Hole size
X.XKg	Gross weight of the product in kg
	Use the protective shield and replace when cracked
ON/OFF	Normal
DIM TRIAC	DT Dim triac : Rear out(RPC) Mos tube dimming
DIM 1-10V	DX Dim 1-10V : The brightness can be changed through the change of 1-10V signal
DIM COLOR	DO Dim color temperature : The color temperature and brightness is dimmable
DIM TO WARM	DS The color temperature can be changed through the brightness changing
DALI DALI	DA Digital Addressable lighting interface
DIM PUSH	DP Dimmable by Push
DIM TOUCH	DT Dimmable by Sensor
IOS/ANDROID	IOS / ANDROID USB Charger
CS-3	Dual channel electronic change controller

IP RATING

The IP rating (International Protection) is regulation defined by the EN 60529 norm (recognized by the CEI organization as 70-1) which explains the protection of electric and electronic devices from extemal solidor liquid agent. The prefix IP is followed by two numbers.

❶ The first number identifies the protection degree against the entry of solid foreign objects.

- IP1X Protected from the entry of solid objects bigger than 50mm
- IP2X Protected from the entry of solid objects bigger than 12mm
- IP3X Protected from the entry of solid objects bigger than 2.5mm
- IP4X Protected from the entry of solid objects bigger than 1mm
- IP5X Protected from the entry of dust
- IP6X Completely protected from the entry of dust

❷ The second number identifies the protection degree against the entry of liquids.

- IPX0 Unprotected
- IPX1 Protected from water drops falling vertically
- IPX2 Protected from water falling with a maximun inclination of 15°
- IPX3 Protected from rain
- IPX4 Protected from sprinklings
- IPX5 Protected from water jets
- IPX6 Protected from wave
- IPX7 Protected against temporary immersion
- IPX8 Protected against permanent immersion (maximun depth 3 meters)

SPECIAL LIGHT BEAM

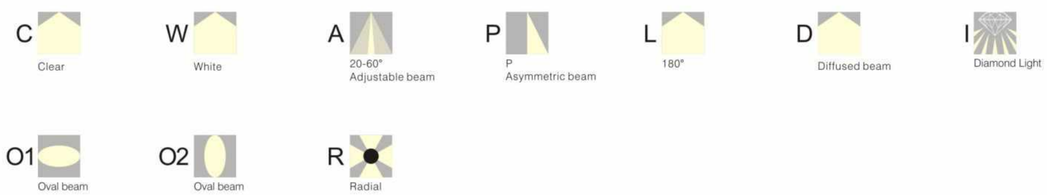

LED COLOURS

Color temperature

Warm White 2700K 3000K 3500K

Neutral White 4000K

Cool White 5000K 5700K 6000K

Other colors

Blue

Red

Green

Amber

Full color

RGB — RGB

RGB — RGB 3IN1

RGB — RxGxB

RGBW — RGBW 4IN1

DIM TO WARM

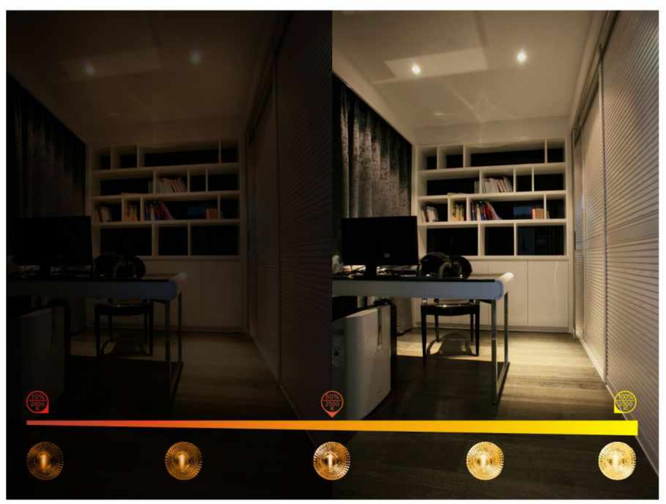

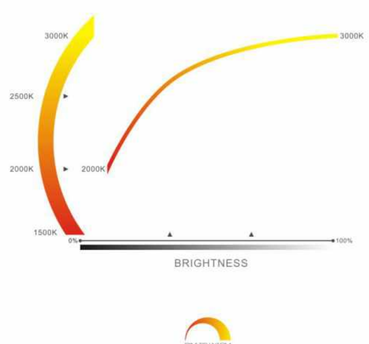

FLICKER

SVM: Stroboscopic effect visibility measure

SVM < 1, stroboscopic invisible;
SVM ≥ 1, stroboscopic visible.

FI: Flicker index

The stroboscopic index refers to the area above and below the average output of optical signal in a period of fluctuation, A1 and A2 respectively. IES recommends FI below 0.1 to ensure good lighting.

Calculation formula:FI=A1/(A1+A2)

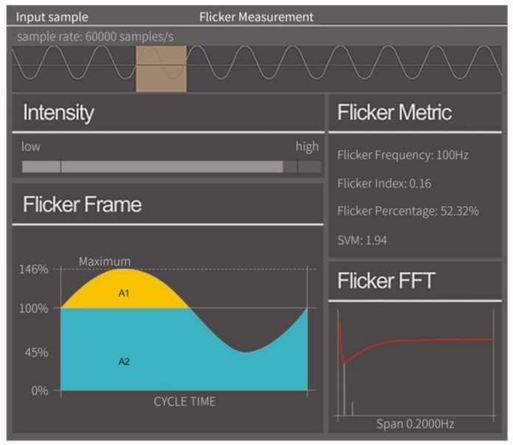

PF: Flicker Percent

The stroboscopic percentage refers to the amplitude and depth of the fluctuation in the standard brightness during a period of fluctuation.

Calculation formula:PF=(Ymax-Ymin)/(Ymax+Ymin)

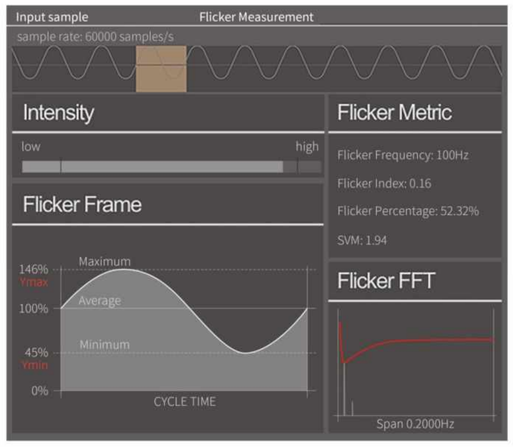

FF: Flicker Frequency

The stroboscopic frequency refers to the number of stroboscopic fluctuations per second of lamps in seconds.
Since the Fps of our eyes are 24 fps, we can't detect whether the lamps are flashing or not.
For a variety of instruments and equipment, we provide stroboscopic frequency for technical personnel to refer to.

FINISH
SINGLE COLOR

Powder spray

PAW	Matte White
PAB	Matte Black
PCS	Matte Coffee
PCY	Matte Champagne yellow
PBK	Black
PSV	Matte Grey
PGY	Matte Dark Grey
PGN	Brilliant Grean

Spray paint (Liquid)

WWP	Liquid Paint In White For Plastlc
WBP	Liquid Paint In Black For Plastlc
WCP	Liquid Paint In Coffee For Plastlc
WSG	Silver Grey
WGL	Golden
WOG	Orange
WBR	Painted In Reddish Brown

Stainless steel

SSS

Anodized

ABS
AGS
AMB

Electroplate

24K Gold
Rose Gold
Black Chrome
Chrome Plate
Sand Chrome

INSPIRATION LIGHTING

CEILING

CRACK 23-24
DOMO 2.0 25-42
METEOR 43-46
PAPER 47-60
RING 61-70

SUSPENDED

ATHENA 73-76
AURA 77-80
BERT 81-88
BOWLING 89-92
CLASSIC 93-98
COMET P 99-100
CORONA 101-104
DARDY 105-112
EGLASS 113-114
ELISA 115-120
FAIRY 121-124
FAVOR 125-130
FEYA 131-134
FLASH 135-140
FORMULIA 2.0 141-150
LOOP 151-152
LOTEL 153-160
MIA 161-166
PALLAS 167-172
PAPER 51-60
PROMEO 173-174
RING 66-70
WAVE 175-188

BEAUTIFICATION

ADRAY 191-192
ASTRA 193-196
AUREOLE 197-198
BALANCE 199-202
BEATTY 203-206
BEL 207-210
BEND 211-216
BOW 217-220
BOWLING 89-92
COAL 221-224
CUBO 225-228
CURES 229-232
DREAM 233-234
ELF 235-236
FISHING 237-240
FOLD 241-244
GEMO 245-248
HEMLINE 249-250
KARINA 251-256
KUBIK 257-258
LIGHTBAR 259-262
LIRA 263-272
LOTEL 156-160
LUXURY 273-276
MIRO 277-282
MOON 283-284
SET 285-286
SHELL 287-288
SINE 289-290
SONG 291-294
TV 295-296
WALL LINE 2.0 297-300
WING 301-304

INSPIRATION LIGHTING

WALL ROTARY

DONNA
307-310

LEGGO
311-312

OTLY
313-316

ROSA
317-318

TATOU
319-322

WALL INSTRUCTIONS

CARD
325-328


DANAS
329-332

KEATON
333-334

SLIDE
335-342

SNOW
343-346

TONE
347-352

TABLE LAMP

AGARIC
355-356

ALFA
357-360

COLUMN
361-368

COSMOS
369-372

LAGO
373-374

SEPHORA
375-378

FLOOR LAMP

ATLAS
381-384

ALFA
358-360

ANDROMEDA
385-386

CIDA
387-390

COLUMN
363-368

FISHING
239-240

FLOOR LAMP

HARI
391-392

LIRA
267-272

INTERIOR

23-61	CEILING RECESSED
73-188	CEILING SUSPENDED
191-322	WALL SURFACE
325-352	WALL RECESSED
355-378	TABLE LAMP
381-392	FLOOR LAMP

ACCESSORIES

395-404	ELECTRICAL SYSTEM

CEILING

CRACK
24

DOMO 2.0 IN 16 AD
27

DOMO 2.0 IN 26 AD
27

DOMO 2.0 IN 35 AD
27

DOMO 2.0 IN 65 AD
28

DOMO 2.0 IN 95 AD
28

DOMO 2.0 ON 11
29

DOMO 2.0 ON 16
30

DOMO 2.0 ON 26
29

DOMO 2.0 ON 35
30

DOMO 2.0 ON 11 AD
29

DOMO 2.0 ON 16 AD
30

DOMO 2.0 ON 26 AD
29

DOMO 2.0 ON 35 AD
30

DOMO 2.1 ON 45
31

DOMO 2.0 ON 60
31

DOMO 2.0 ON 65
31

DOMO 2.0 ON2 95
32

DOMO 2.0 ON2 35
33

DOMO 2.0 ON2 65
33

DOMO 2.0 ON2 95
33

CRACK
46

PAPER 2.0 ONR SS
49

PAPER 2.0 ONR S
49

PAPER 2.0 ONR M
49

PAPER 2.0 ONR L
49


PAPER 2.0 ONS
53

RING IN 45
63

RING IN 80
63

RING ON 12
64

RING ON 24
64

RING ON 12 AD
65

RING ON 24 AD
65

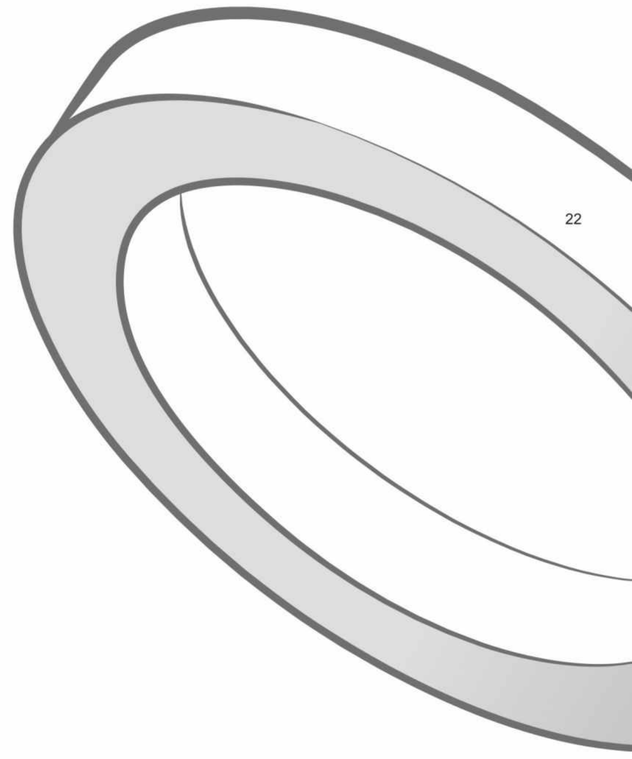

PERFORM YOUR LIGHT

CRACK

The eye catcher luminaire has become a great example of light and art combination. The result is CRACK.
CRACK, as its name indicates, creates the effect of crack on the ceiling, thanks to its unique design concept. The fitting has 2*8.4W LED each with 15 beam angle. Most dramatic light and decorative effect can be produced with CRACK, creating a high contract lighting effect between dark and light.

IP20 100-240VAC DIM TRIAC

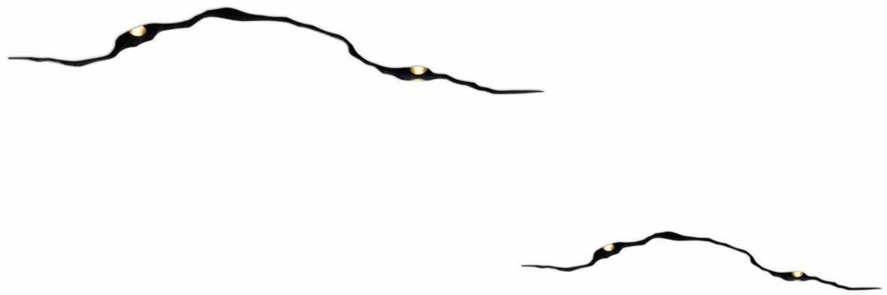

CRACK

LED POWER: 2*8.4W
CRI: 90
SYSTEM POWER: 2*10.5W
OUTPUT: 853Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 676*214*88mm
HOLE SIZE: /

192611A





ANGLE 15°



8.4W 15° 3000K



8.4W 15° 3000K



RECOMMEND:

ON/OFF
192611A

OTHER VERSIONS:

DIM TRIAC
192611DT

DOMO

DOMO, with its pure geometrical shapes and perfect diffused light,
creates unique harmonious atmosphere for any room, generating pleasant light effect.
From direct surface mounted to installation with adjustable bracket,
from trimless to pendant versions, DOMO series provides various installation choices.
To enlarge DOMO collection, up/down version was specially
created for surface mounted and suspended range.

CE IP20 100/220-240VAC DIM COLOR DIM 1-10V

IN 16 AD

IN 26 AD

IN 35 AD

IN 65 AD

IN 95 AD

DOMO 2.0



ON 11

ON 11 AD

ON 16

ON 16 AD

ON 26

ON 26 AD

ON 35

ON 35 AD

DOMO 2.1

ON 60 AC

ON 45 AC

ON2 95

ON2 45

ON2 65

DOMO 2.0 IN 16 AD

LED POWER:9.6W
CRI: 90
SYSTEM POWER:11.2W
OUTPUT: 875Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø198*100mm
HOLE SIZE: Ø200mm

153614A

ANGLE L



9.6W L 3000K



9.6W L 3000K



DOMO 2.0 IN 35 AD

LED POWER:20.1W
CRI: 90
SYSTEM POWER:23.7W
OUTPUT: 1304Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø350*105.7mm
HOLE SIZE: Ø395mm

L

188214A

DOMO 2.0 IN 65 AD

LED POWER:43.4W
CRI: 90
SYSTEM POWER:48.3W
OUTPUT: 2657Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø650*115mm
HOLE SIZE: Ø695mm

L

188314A

DOMO 2.0 IN 95 AD

LED POWER:95W
CRI: 90
SYSTEM POWER:106W
OUTPUT: 5830Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø950*115mm
HOLE SIZE: Ø995mm

L

188414A



DOMO 2.0 IN 26 AD

LED POWER:15.7W
CRI: 90
SYSTEM POWER:19.2W
OUTPUT: 1056Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø260*105.7mm
HOLE SIZE: Ø305mm

188114A

ANGLE L



15.7W L 3000K



15.7W L 3000K



DOMO 2.0 ON 11 / ON 11 AD

LED POWER:4.8W
CRI: 90
SYSTEM POWER:5.8W
OUTPUT: 307Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø110*50mm
Ø110*75.5mm
HOLE SIZE: /

205114A

204714A



ANGLE L



4.8W L 3000K



4.8W L 3000K



DOMO 2.0 ON 16 / ON 16 AD

LED POWER:9.6W
CRI: 90
SYSTEM POWER:11.2W
OUTPUT: 875Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø160*50mm
Ø160*80.5mm
HOLE SIZE: /

205214A

204814A

ANGLE L



9.6W L 3000K



9.6W L 3000K



DOMO 2.0 ON 26

LED POWER: 24.8W
CRI: 90
SYSTEM POWER: 29.8W
OUTPUT: 1597Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø260*60mm
HOLE SIZE: /

L

205314A



DOMO 2.0 ON 26 AD

LED POWER: 15.7W
CRI: 90
SYSTEM POWER: 19.2W
OUTPUT: 1056Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø260*104.8mm
HOLE SIZE: /

L

215514A



DOMO 2.0 ON 35

LED POWER: 32.8W
CRI: 80
SYSTEM POWER: 38.6W
OUTPUT: 2239Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø350*60mm
HOLE SIZE: /

L

205414A



DOMO 2.0 ON 35 AD

LED POWER: 20.1W
CRI: 90
SYSTEM POWER: 23.7W
OUTPUT: 1304Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø350*104.8mm
HOLE SIZE: /

L

215614A



DOMO 2.1 ON 45 AC

LED POWER: 45.7W/AC LED
CRI: 80
SYSTEM POWER: 45.7W
OUTPUT: 3592Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
223214DT

DOMO 2.1 ON 65 AC

LED POWER: 66.6W/AC LED
CRI: 80
SYSTEM POWER: 66.6W
OUTPUT: 5366Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: /

L



RECOMMEND

DIM TRIAC
223314DT

DOMO 2.1 ON2 45 / ON2 45 CS-3

LED POWER: 40.32+6.4W
CRI: 90
SYSTEM POWER: 43.8+8.9W
OUTPUT: 2858+493Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
221814DX

ON/OFF
221914A



DOMO 2.1 ON2 65 / ON2 65 CS-3

LED POWER: 61.6W+8W
CRI: 90
SYSTEM POWER: 69W+11.9W
OUTPUT: 4905+659Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
222114DX

ON/OFF
222214A



DOMO 2.1 ON2 45 DO

LED POWER: 39.3+8.3W
CRI: 90
SYSTEM POWER: 54.4W
OUTPUT: 3620Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
222714DO

DOMO 2.1 ON2 65 DO

LED POWER: 54.3+9.96W
CRI: 90
SYSTEM POWER: 74W
OUTPUT: 5060Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
222914DO

DOMO 2.1 ON2 95 DO

LED POWER: 130+12.45W
CRI: 90
SYSTEM POWER: 131.5W
OUTPUT: 8664Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø950*93.2mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
223114DO

DOMO 2.1 ON2 95 / ON2 95 CS-3

LED POWER: 98.56+11.2W
CRI: 90
SYSTEM POWER: 103+15W
OUTPUT: 8246+815Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø950*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
222414DX

ON/OFF
222514A



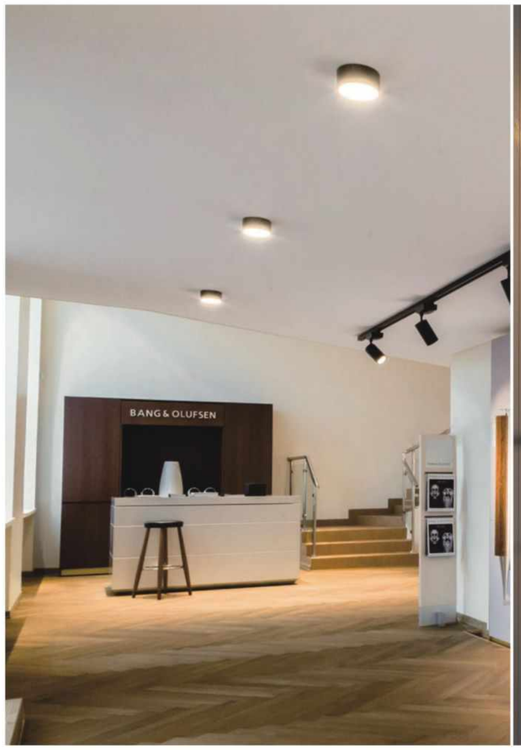
BANG & OLUFSEN

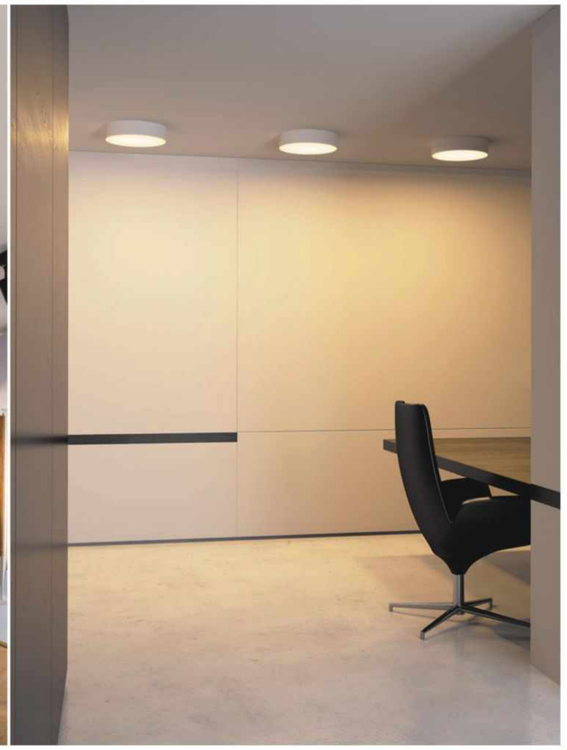

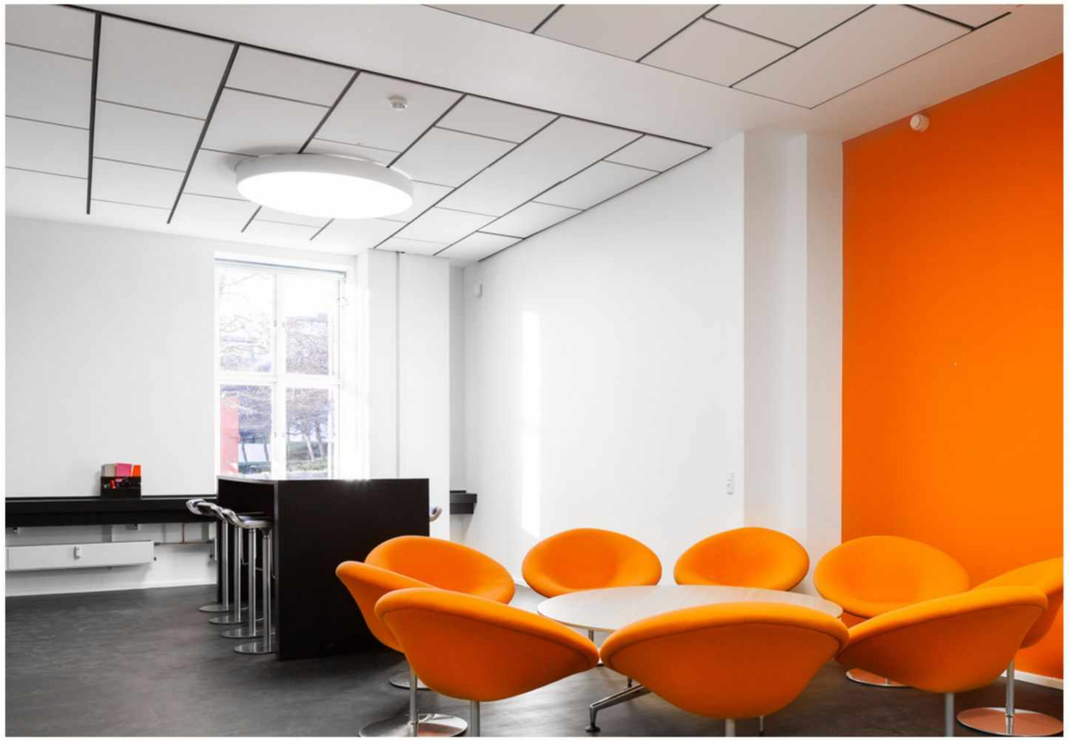

DOMO

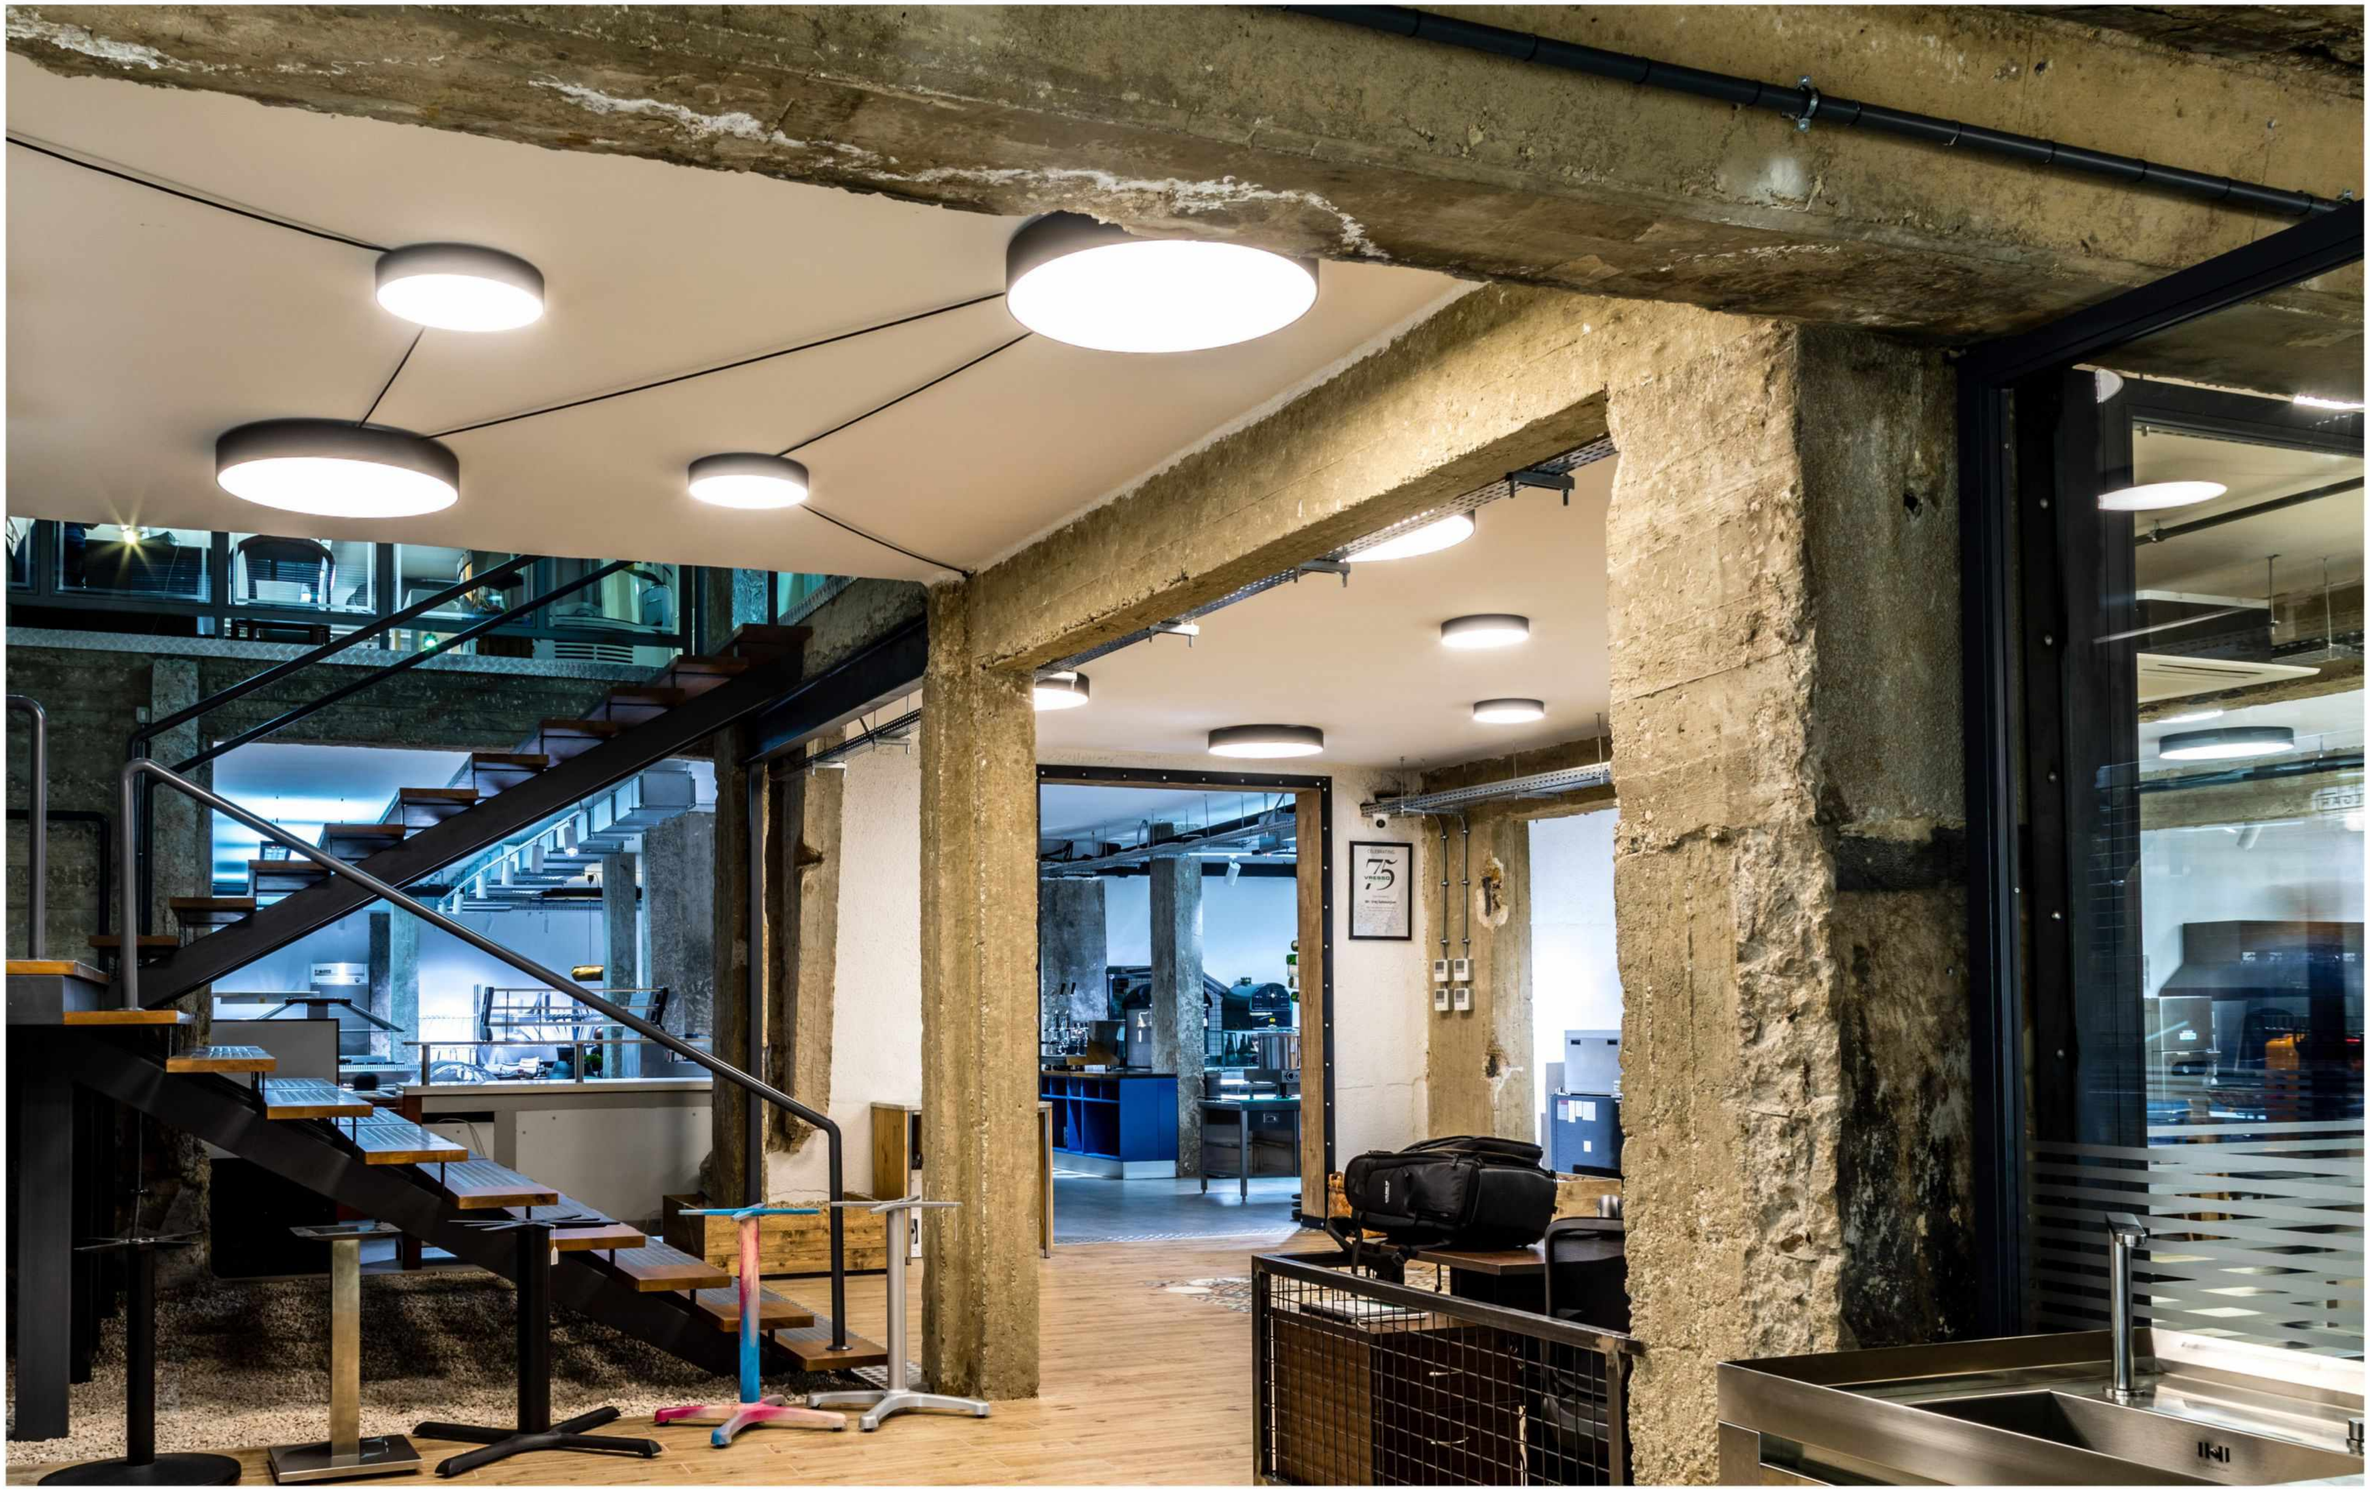

METEOR

Constructing geometric sculptures of light,
METEOR establishes an intimate relationship with space
and combines functionality with beauty of pure lines.
Thanks to METEOR narrow beam angle, just 15°,
it can create perfect light effect, focusing on separate objects in the room.
Installed in a group, with different heights and angles,
METEOR creates unique lighting patterns on the ceiling.

CE IP20 220-240VAC DIM TRIAC

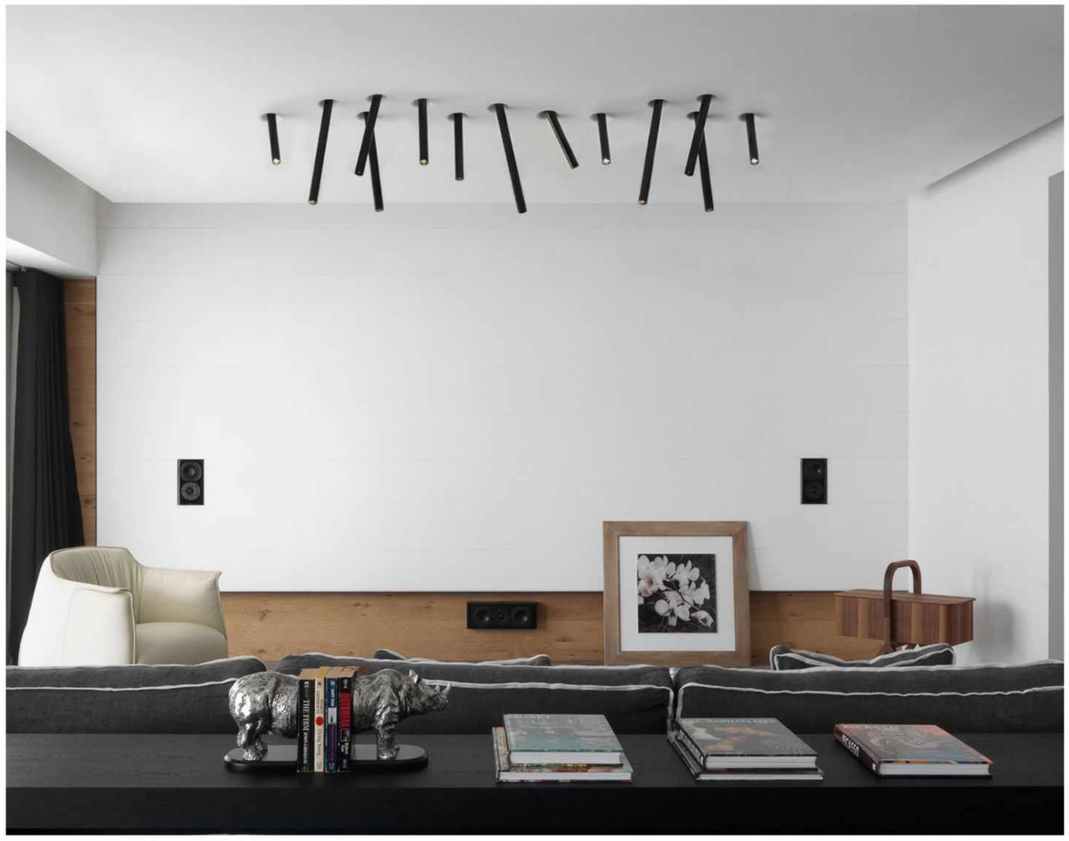

IN TRIMLESS

METEOR IN TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 413Lm/3000K
INPUT: 220-240VAC,50/60Hz

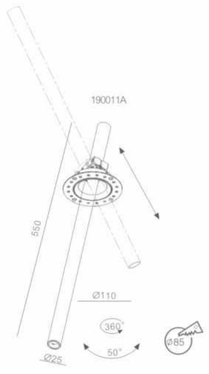

ANGLE 15°



6W 15° 3000K



6W 15° 3000K



RECOMMEND:

ON/OFF
190011A

OTHER VERSIONS:

DIM TRIAC
190011DT

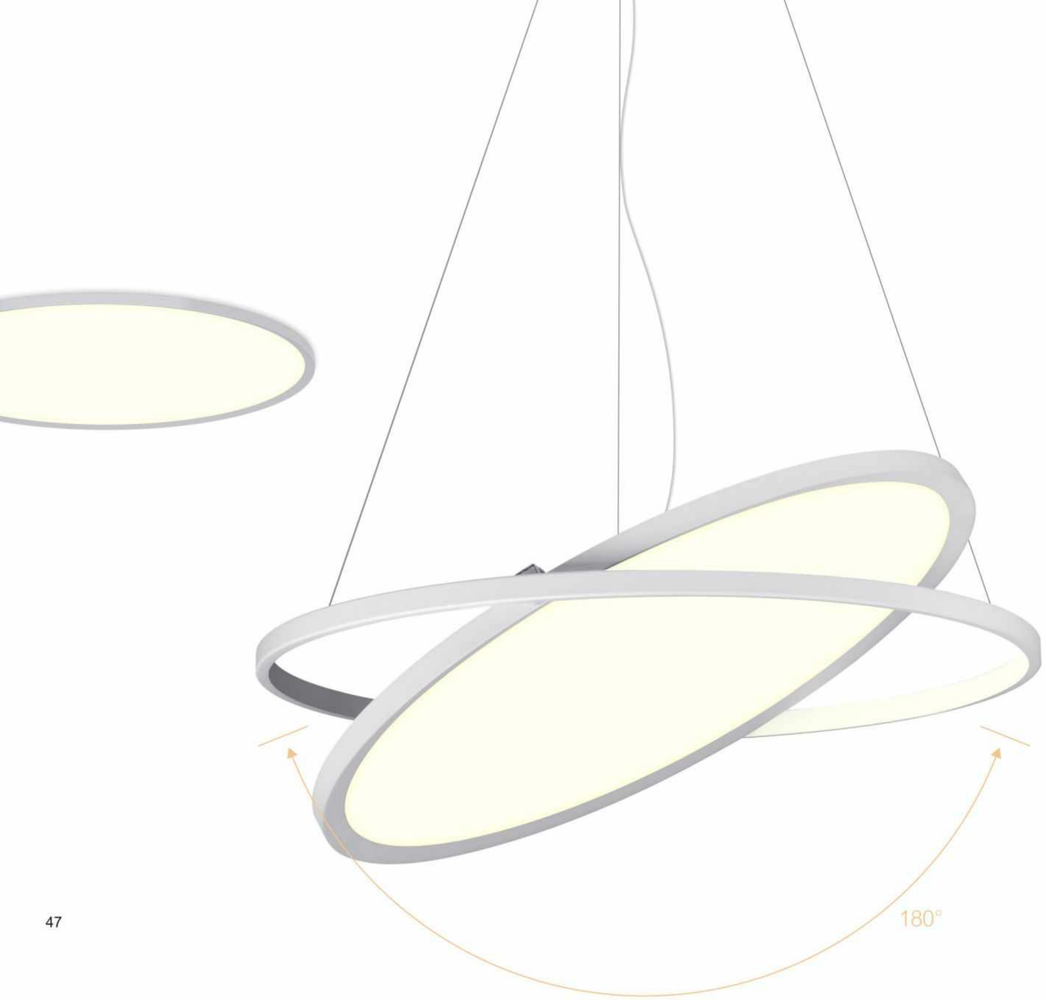

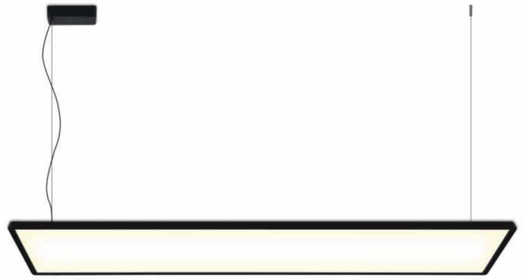

PAPER 2.0

PAPER with its pure geometrical shapes and soft
diffused light guarantees splendid atmosphere to the room.
PAPER collection comes with 4 sizes for round shaped version and
2 sizes for rectangular shaped fixture. Both versions can be
suspended or surface mounted.
In addition, PAPER has DIM COLOR function.
Suspended version is equipped by special adjustable function.

CE IP20 100/220-240VAC DIM COLOR DIM 1-10V

PAPER 2.0 ONR/PR/PS

Suggestions for supporting use in the above products



ONR M

ONR L

ONR S

ONR SS

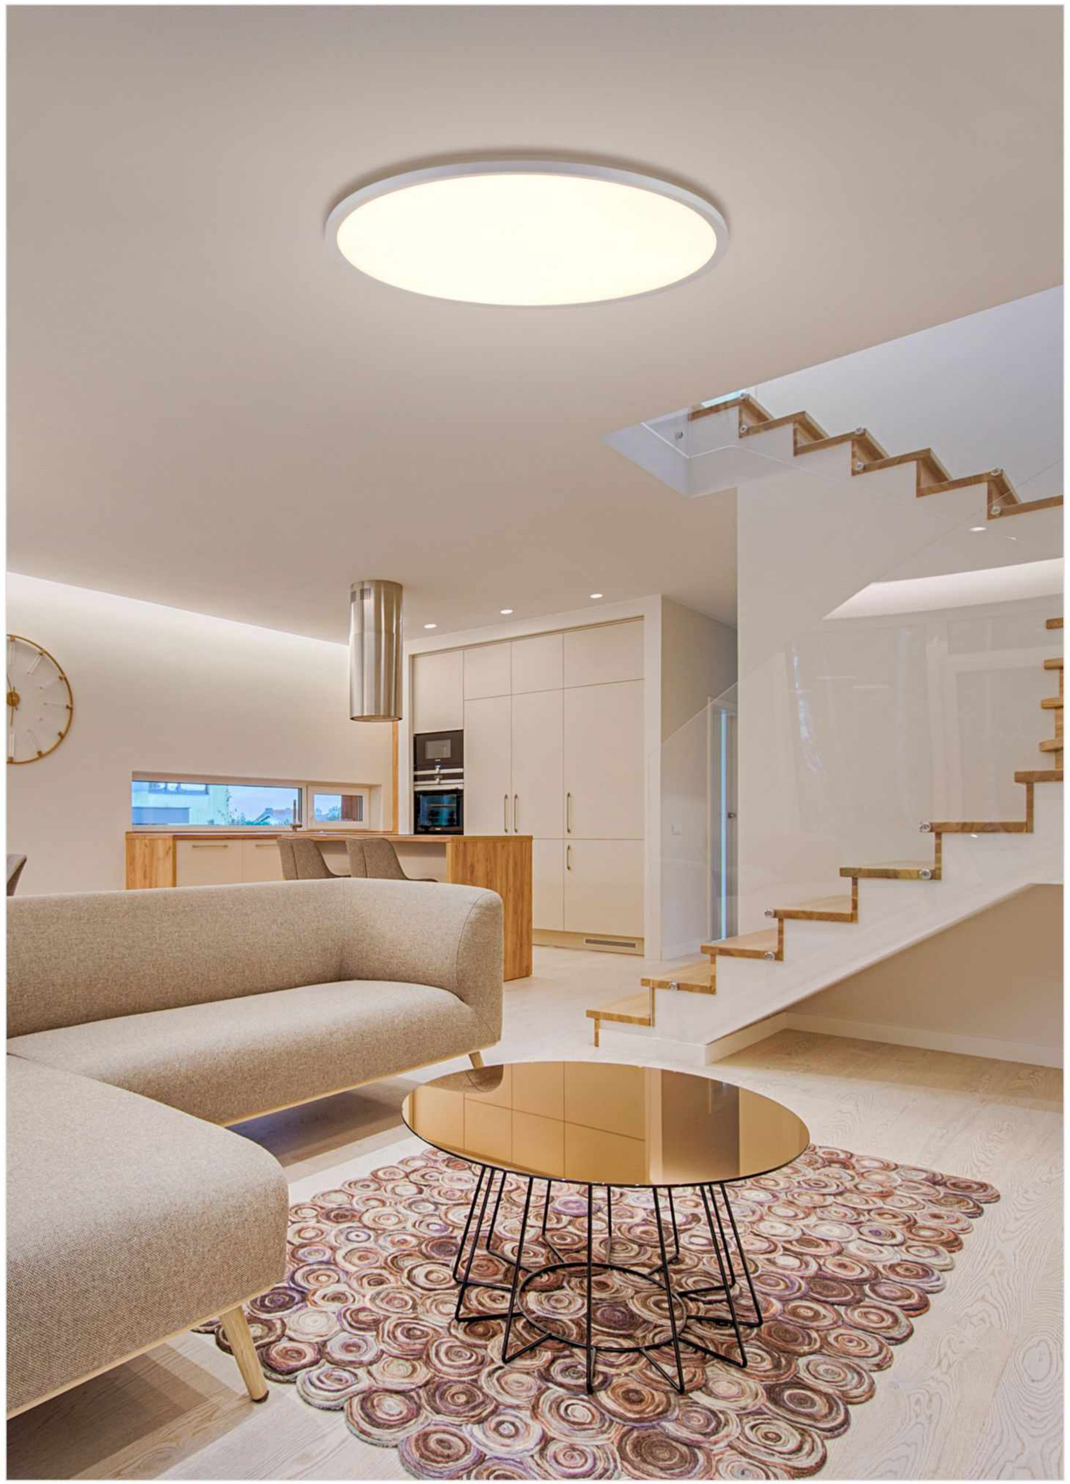

PR S

PR M

PR SS

PR L

PR S AD

ONS

PS M / PS DO

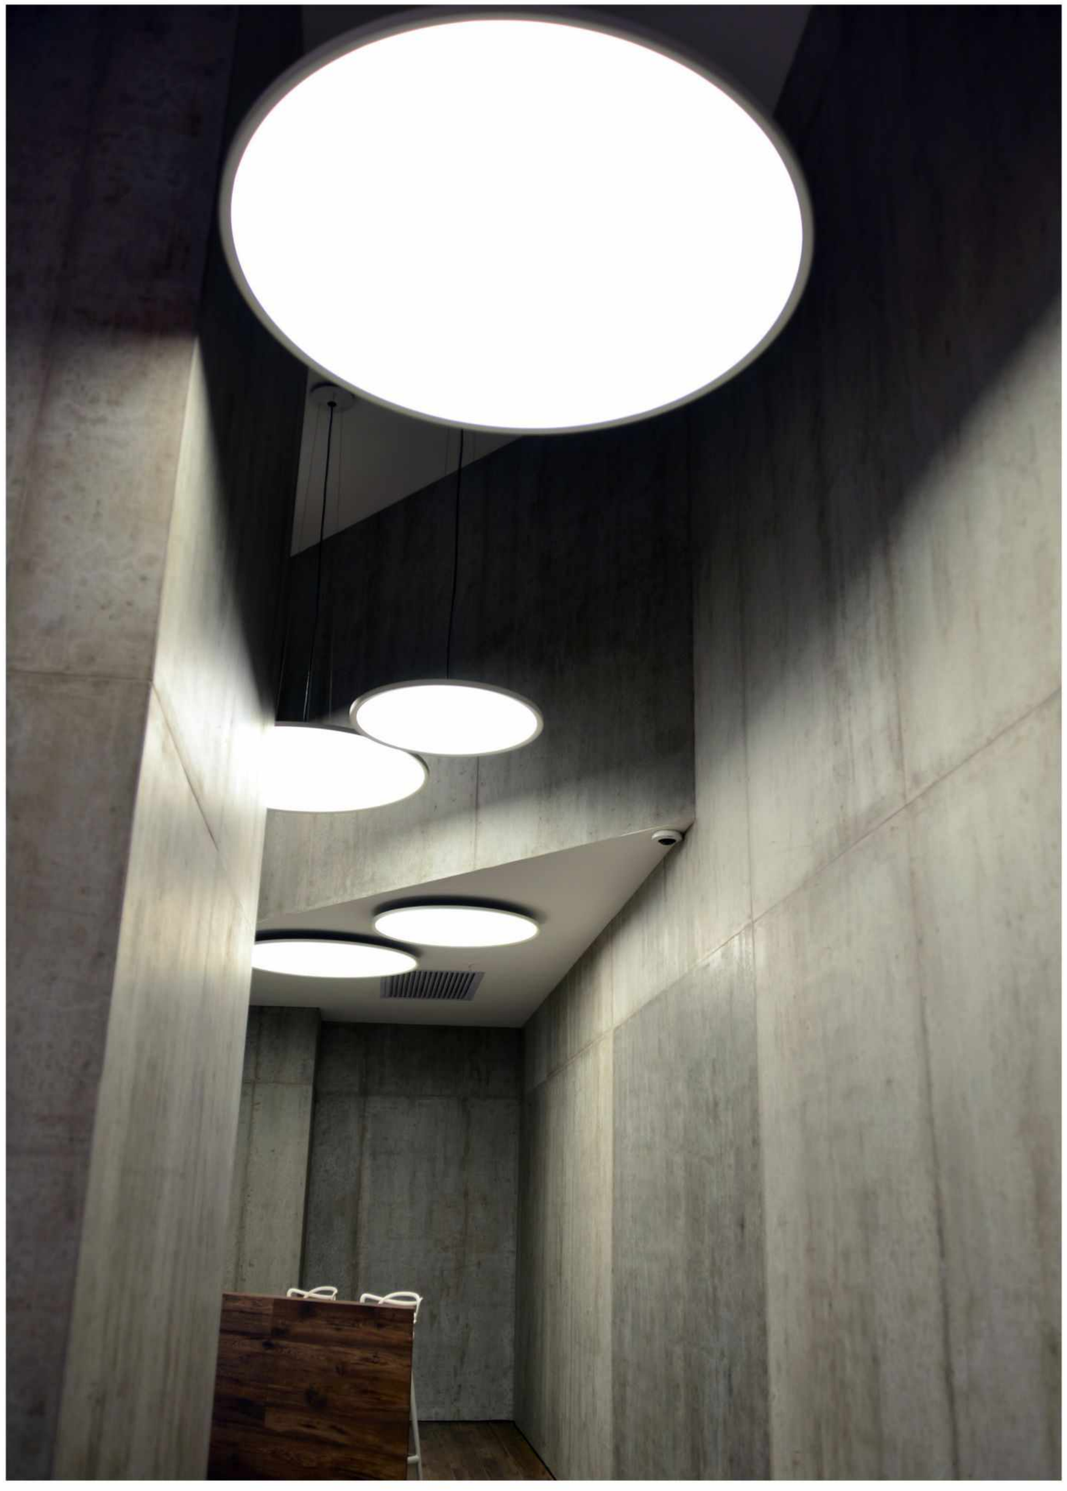

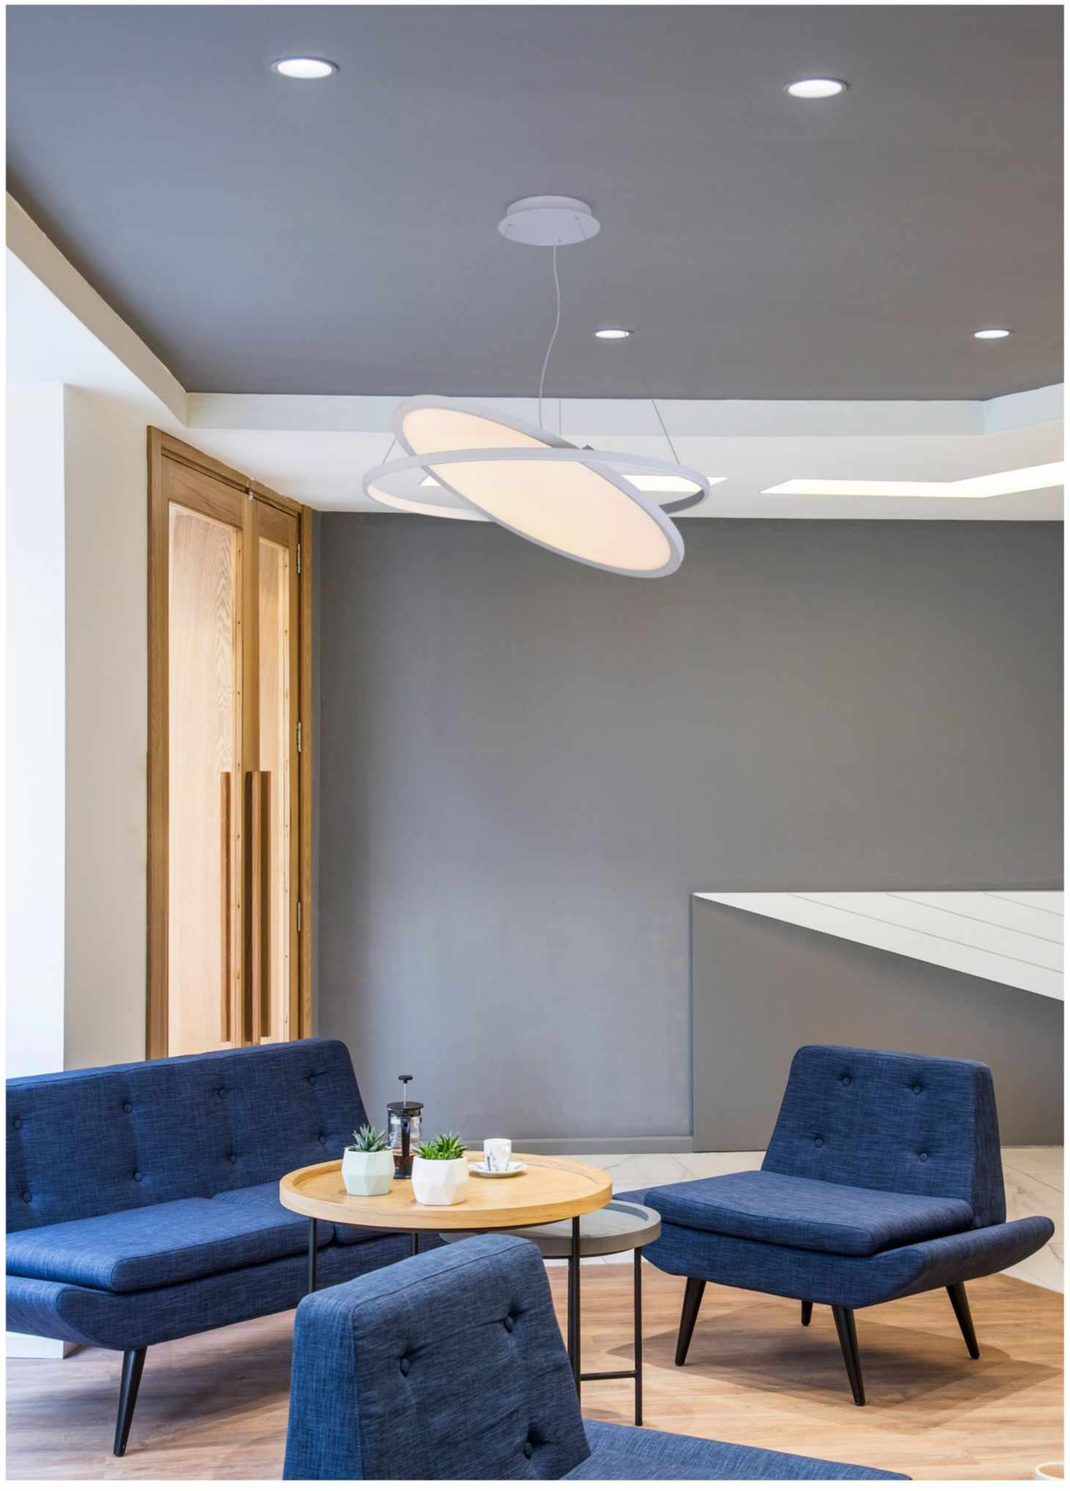

Color Temperature Adjustable
2700K-5700K

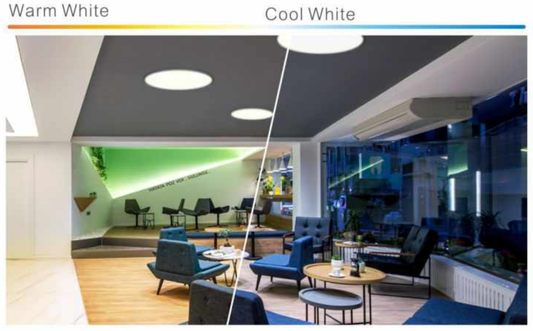

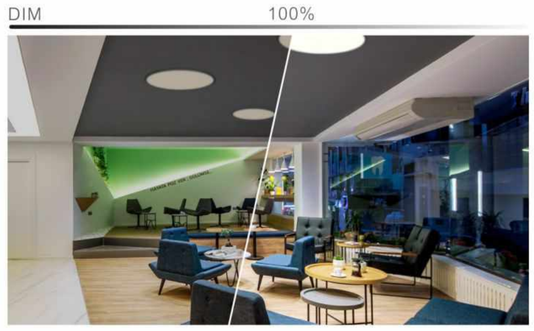

PAPER 2.0 ONR SS

220514DO

LED POWER: 36.8W
CRI: 90
SYSTEM POWER: 44W
OUTPUT: 1720Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø439*50.5mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
220514DO

OTHER VERSIONS:
DIM 1-10V
219414DX

PAPER 2.0 PR SS

324114DO

LED POWER: 36.8W
CRI: 90
SYSTEM POWER: 44W
OUTPUT: 1760Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø438*80mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
324114DO

OTHER VERSIONS:
DIM 1-10V
321914DX

PAPER 2.0 PR S AD

324514DO

LED POWER: 52W
CRI: 90
SYSTEM POWER: 62W
OUTPUT: 2480Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø694*22mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
324514DO

PAPER 2.0 ONR S

220614DO

LED POWER: 52W
CRI: 90
SYSTEM POWER: 62W
OUTPUT: 2480Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø646*60mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
220614DO

OTHER VERSIONS:
DIM 1-10V
219014DX

PAPER 2.0 PR S

324214DO

LED POWER: 52W
CRI: 90
SYSTEM POWER: 62W
OUTPUT: 2480Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø646*80mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
324214DO

OTHER VERSIONS:
DIM 1-10V
321614DX

PAPER 2.0 PS

325714DO

LED POWER: 45.3W
CRI: 90
SYSTEM POWER: 48W
OUTPUT: 2250Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1200*300*16mm
HOLE SIZE: /



L

RECOMMEND
DIM COLOR
RF-2.4
325714DO

OTHER VERSIONS:
DALI
DIM PUSH
303514DP

PAPER 2.0 ONR M

220714DO

LED POWER: 70W
CRI: 90
SYSTEM POWER: 84W
OUTPUT: 3360Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø853*60mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
220714DO

OTHER VERSIONS:
DIM 1-10V
219114DX

PAPER 2.0 PR M

324314DO

LED POWER: 70W
CRI: 90
SYSTEM POWER: 84W
OUTPUT: 3360Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø853*82mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
324314DO

OTHER VERSIONS:
DIM 1-10V
321714DX

PAPER 2.0 ONS M

208814DP

LED POWER: 44.2W
CRI: 80
SYSTEM POWER: 52W
OUTPUT: 2080Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 1200*300*52mm
HOLE SIZE: /

L

RECOMMEND
DALI
DIM PUSH
208814DP

PAPER 2.0 ONR L

220814DO

LED POWER: 86W
CRI: 90
SYSTEM POWER: 103W
OUTPUT: 4120Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1060*82mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
220814DO

OTHER VERSIONS:
DIM 1-10V
219214DX

PAPER 2.0 PR L

324414DO

LED POWER: 86W
CRI: 90
SYSTEM POWER: 103W
OUTPUT: 4120Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1060*86mm
HOLE SIZE: /

L

RECOMMEND
DIM COLOR
RF-2.4
324414DO

OTHER VERSIONS:
DIM 1-10V
321814DX

RING

A combination of slim lighting disks, floating in the space, could bring unforgettable enigmatic atmosphere to any room, be it residential or commercial areas. Diffused light produces uniformed and perfectly balanced lighting effect. RING could be installed directly, or with flexible bracket, that can tilt the disk up to 45°, rack mounted version is also available. Trimless version was created specially to complete RING collection.

CE IP20 100/220-240VAC DALI

IN 45

IN 80

ON 12

ON 24

ON 12 AD

ON 24 AD

P 24

P 45

200

RING

RING IN45

LED POWER: 37.8W
CRI: 90
SYSTEM POWER: 45W
OUTPUT: 2680Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø725*54.5mm
HOLE SIZE: Ø735mm



L

RECOMMEND

ON/OFF
190314A

OTHER VERSIONS:

DALI
190314DA

RING IN80

LED POWER: 72W
CRI: 90
SYSTEM POWER: 80W
OUTPUT: 4910Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1150*54.5mm
HOLE SIZE: Ø1160mm



L

RECOMMEND

ON/OFF
190414A

OTHER VERSIONS:

DALI
190414DA

RING P 24

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1565Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø390*50mm
HOLE SIZE: /



L

RECOMMEND

ON/OFF
309314A

RING P 45

LED POWER: 37.8W
CRI: 80
SYSTEM POWER: 45W
OUTPUT: 2650Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø700*50mm
HOLE SIZE: /



L

RECOMMEND

ON/OFF
309414A

RING ON12

LED POWER: 10.5W
CRI: 80
SYSTEM POWER: 12W
OUTPUT: 859Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø250*50mm
HOLE SIZE: /

L

RECOMMEND

ON/OFF
217014A

RING ON 24

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1565Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø390*50mm
HOLE SIZE: /



L

RECOMMEND

ON/OFF
217114A

RING ON12 AD

LED POWER: 10.5W
CRI: 80
SYSTEM POWER: 12W
OUTPUT: 850Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø250*95.6mm
HOLE SIZE: /

L

RECOMMEND

ON/OFF
217214A

RING ON 24 AD

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1565Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø390*139.4mm
HOLE SIZE: /



L

RECOMMEND

ON/OFF
217314A

SUSPENDED

ATHENA 74
AURA S 77
AURA L 77
BERT RS DO/RS 83
BERT RM DO/RM 83
BERT RL DO/RL 83
BERT VS DO 84
BERT VM DO 84
BERT VL DO 84
BOWLING P 90
CLASSIC ROUND 94
CLASSIC ELLIPSE 95
COMET P 100
CORONA P3 102
CORONA P5 103
DARDY W1 106
DARDY W1P 106
DARDY W3 107
DARDY W6 108
EGLASS 114
ELISA 300DO/300 116
ELISA 400DO/400 116
ELISA 600DO/600 116
FAIRY G4 122
FAIRY G11 122
FAVOR P 126
FAVOR P+ 126
FEYA GLASS 132
FEYA GLASS TRIMLESS 132
FLASH P SQ 136
FLASH P 137
FLASH V 139
FORMULIA 350 142
FORMULIA 550 142
FORMULIA 750 142
FORMULIA 350 TRIMLESS 143
FORMULIA 550 TRIMLESS 143
FORMULIA 750 TRIMLESS 143
FORMULIA L 350 GROUP 144
FORMULIA L 550 GROUP 145
FORMULIA L 750 GROUP 146
LOOP P 3 151

LOOP P 6 151
LOOP P 9 151
LOTEL P150 154
LOTEL P225 154
LOTEL P300 154
LOTEL P400 155
LOTEL P 600 155
MIA S 162
MIA S TRIMLESS 162
MIA GROUP 163
PALLAS FUNNEL 168
PALLAS EGG 168
PALLAS DIAMOND 169
PALLAS FUNNEL TRIMLESS 169
PALLAS EGG TRIMLESS 170
PALLAS DIAMOND TRIMLESS 170
PAPER SS 51
PAPER S 51
PAPER M 51
PAPER L 51
PAPER PR S AD 52
PAPER PS M/PS DO 54
PROMEO L1 173
PROMEO L2 173
PROMEO L3 173
RING P 24 66
RING P 45 66
WAVE H S 30 DN 175
WAVE H L 30 DN 176
WAVE V S 20 UP 177
WAVE V LS 30 UP 178
WAVE V L 30 UP 179
WAVE V S 10 DN 180

PERFORM YOUR LIGHT

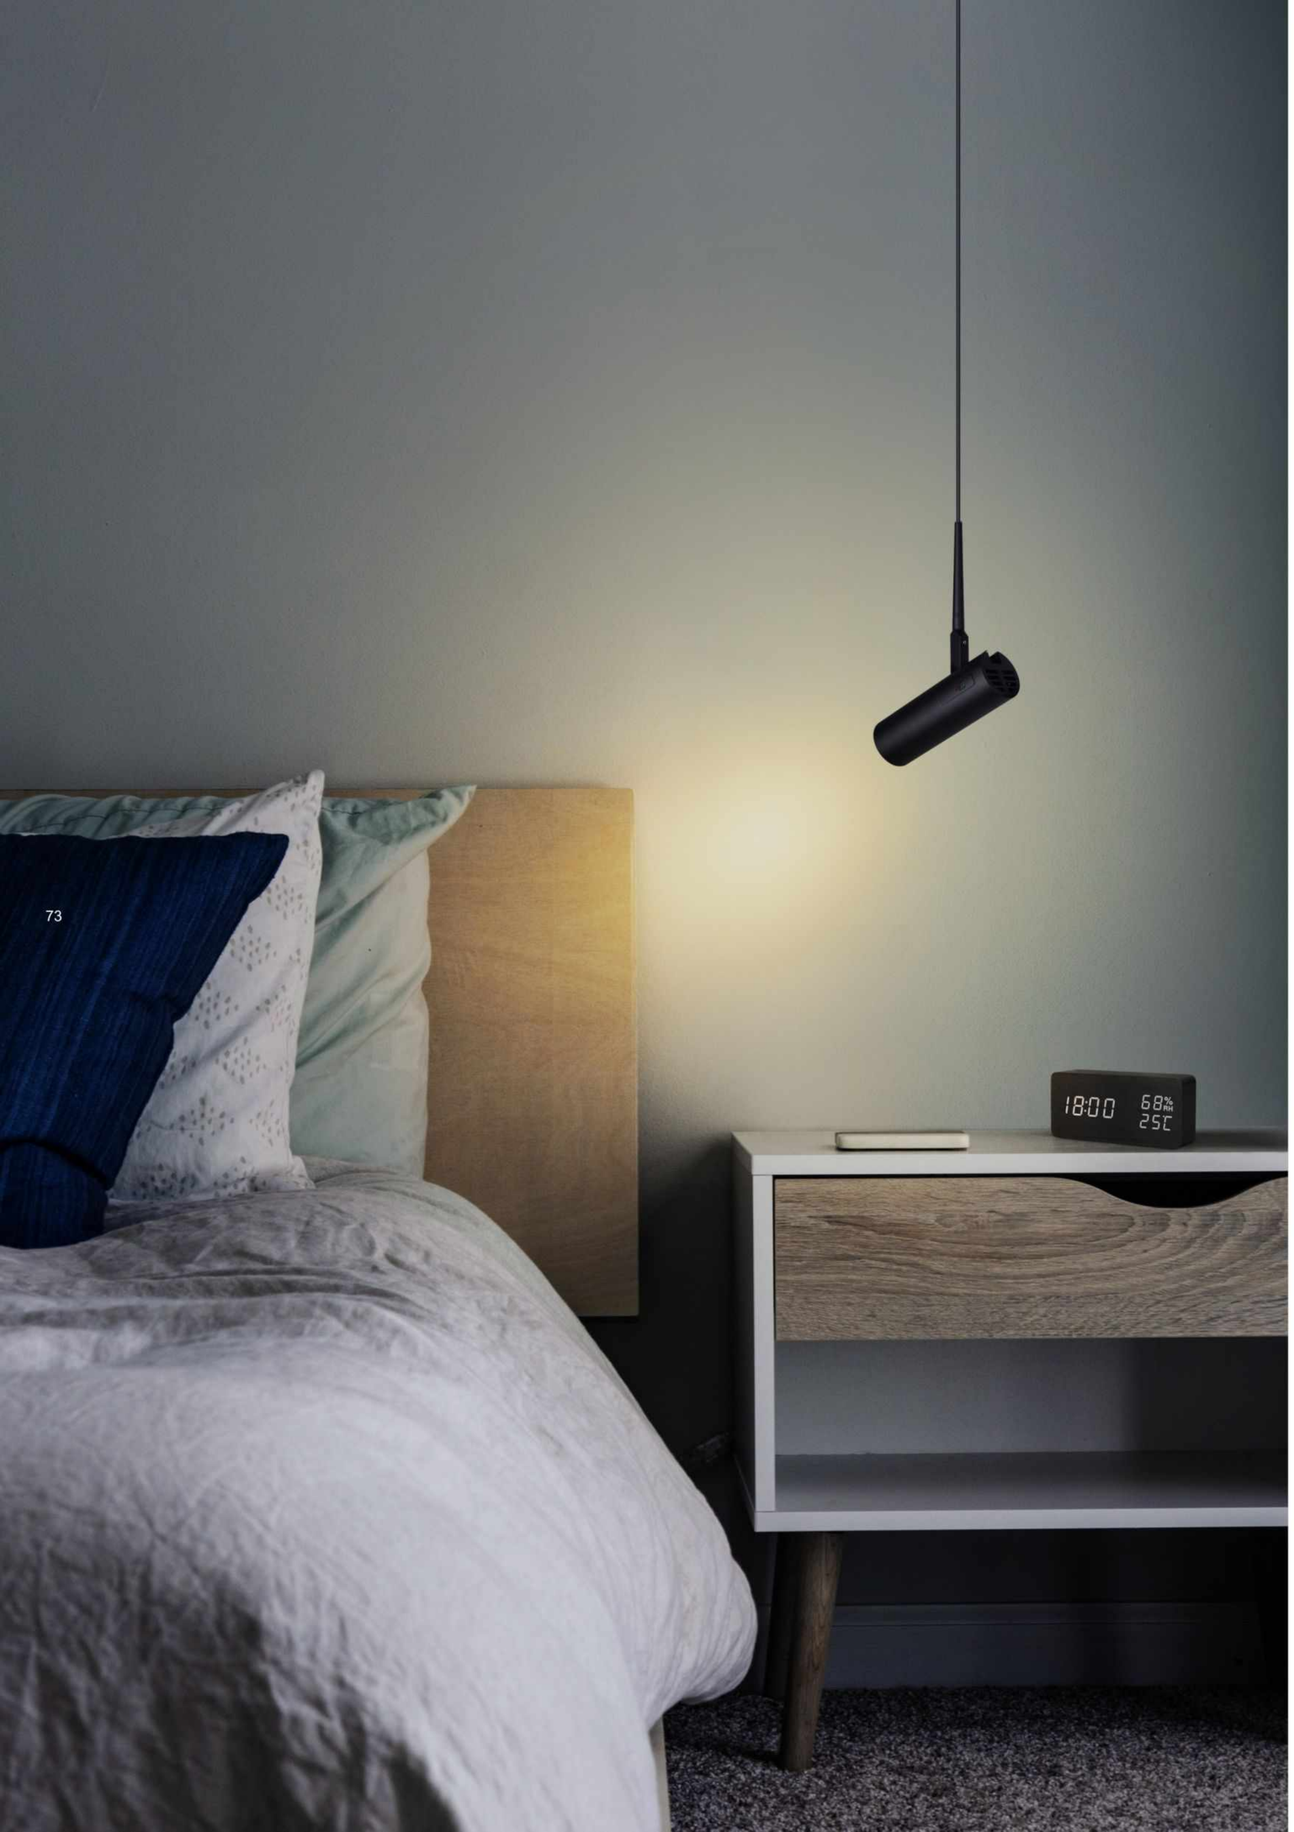

SPOT

ATHENA

Minimalism is coming in each tiny detail, minimal decoration and maximum comfort, functionality and laconism.
ATHENA is a great example of design with minimal details.
This is a great integration of furniture and lighting.
This splendid pendant spot is designed specially to provide new solution for reading lamp.
The maximum length of suspending system, 170 mm,
can be easily adjusted in accordance to required design.
In addition, touch DIM function makes it easy to DIM the lamp.

CE IP20 100-240VAC DIM TOUCH

ATHENA SPOT

LED POWER: 3.6W
CRI: 90
SYSTEM POWER: 5W
OUTPUT: 296Lm/3000K
INPUT: 100-240VAC
DIMENSION: Ø42*130mm
HOLE SIZE: /

RECOMMEND

DIM TOUCH
324615DT

ANGLE 23°



3.6W 23° 3000K



3.6W 23° 3000K



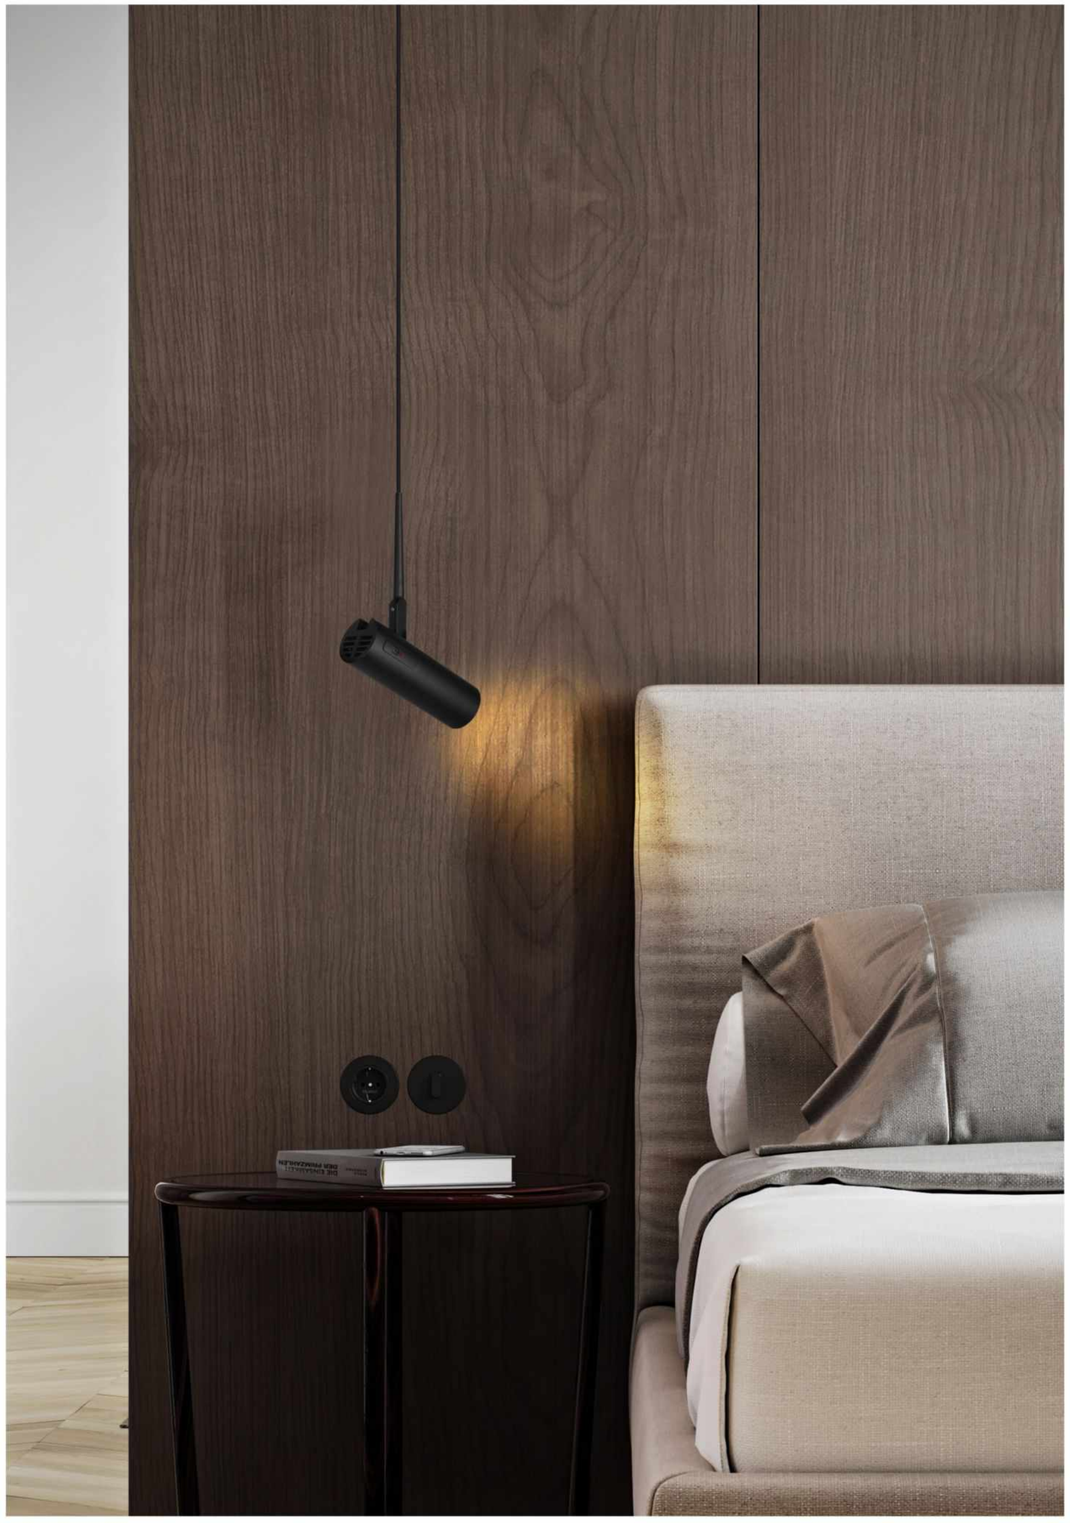

COLOR FINISHINGS:

PAB

PAW

AURA L

AURA M

AURA

Minimalism and functionality
are key words to describe AURA collection.
Pure geometrical forms, where all proportions and details are considered,
make AURA extremely popular range. Be it residential or commercial spaces,
AURA is the best choice for bar tables or dining rooms.
2 sizes are available.

IP20 220-240VAC DIM TRIAC

AURA M

LED POWER:15W AC-LED
CRI: 80
SYSTEM POWER:15W
OUTPUT: 786Lm/3000K
INPUT: 230-240VAC,50/60Hz
DIMENSION: Ø190*168mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
303013DT

AURA L

LED POWER:30W AC-LED
CRI: 80
SYSTEM POWER:30W
OUTPUT: 1491Lm/3000K
INPUT: 230-240VAC,50/60Hz
DIMENSION: Ø243*199mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
304013DT

COLOR FINISHINGS:

WBL - WGL WBL - WSG WWH - WSG

BERT

A series of slim rings floating through space, with its retro-look appearance is the best choice for many applications.
3 diameters are available for choice. This circle of leds is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect.

CE IP20 100/220-240VAC DIM COLOR 2.4 DIM 1-10V

TURN OFF

TURN ON

BERT RS DO/RM DO/ RL DO/ VS DO/ VS DO/ VS DO

Suggestions for supporting use in the above products

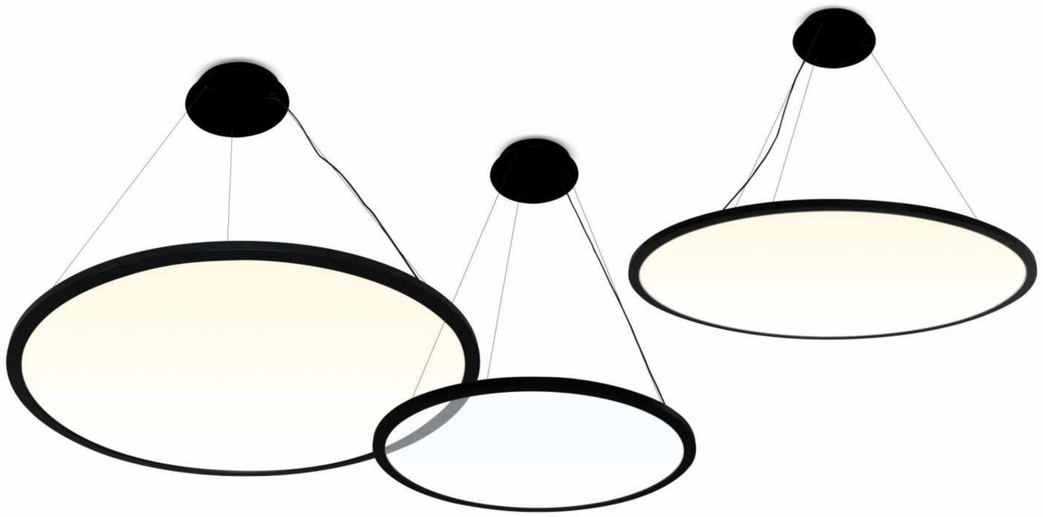

RL DO/RL

RS DO/RS

RM DO/RM

VM DO

VS DO

VL DO

Color Temperature Adjustable
2700K-5700K

Warm White — Cool White

DIM — 100%

BERT RS DO

LED POWER: 42W
CRI: 90
SYSTEM POWER: 48W
OUTPUT: 2640Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø730*18mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324714DO

324714DO

BERT RS

LED POWER: 40W
CRI: 90
SYSTEM POWER: 47W
OUTPUT: 2585Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø730*18mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
322414DX

322414DX

BERT VS DO

LED POWER: 42W
CRI: 90
SYSTEM POWER: 48W
OUTPUT: 2640Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø730*18mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325014DO

325014DO

BERT RM DO

LED POWER: 50.4W
CRI: 90
SYSTEM POWER: 58W
OUTPUT: 3190Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø905*18mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324814DO

324814DO

BERT RM

LED POWER: 50W
CRI: 90
SYSTEM POWER: 58W
OUTPUT: 3190Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø905*18mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
322514DX

322514DX

BERT VM DO

LED POWER: 50.4W
CRI: 90
SYSTEM POWER: 58W
OUTPUT: 3190Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø905*18mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325114DO

325114DO

BERT RL DO

LED POWER: 60.5W
CRI: 90
SYSTEM POWER: 72W
OUTPUT: 3960Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1080*18mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324914DO

324914DO

BERT RL

LED POWER: 53.76W
CRI: 90
SYSTEM POWER: 63W
OUTPUT: 3465Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1080*18mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
322614DX

322614DX

BERT VL DO

LED POWER: 60.5W
CRI: 90
SYSTEM POWER: 72W
OUTPUT: 3960Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1080*18mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325214DO

325214DO

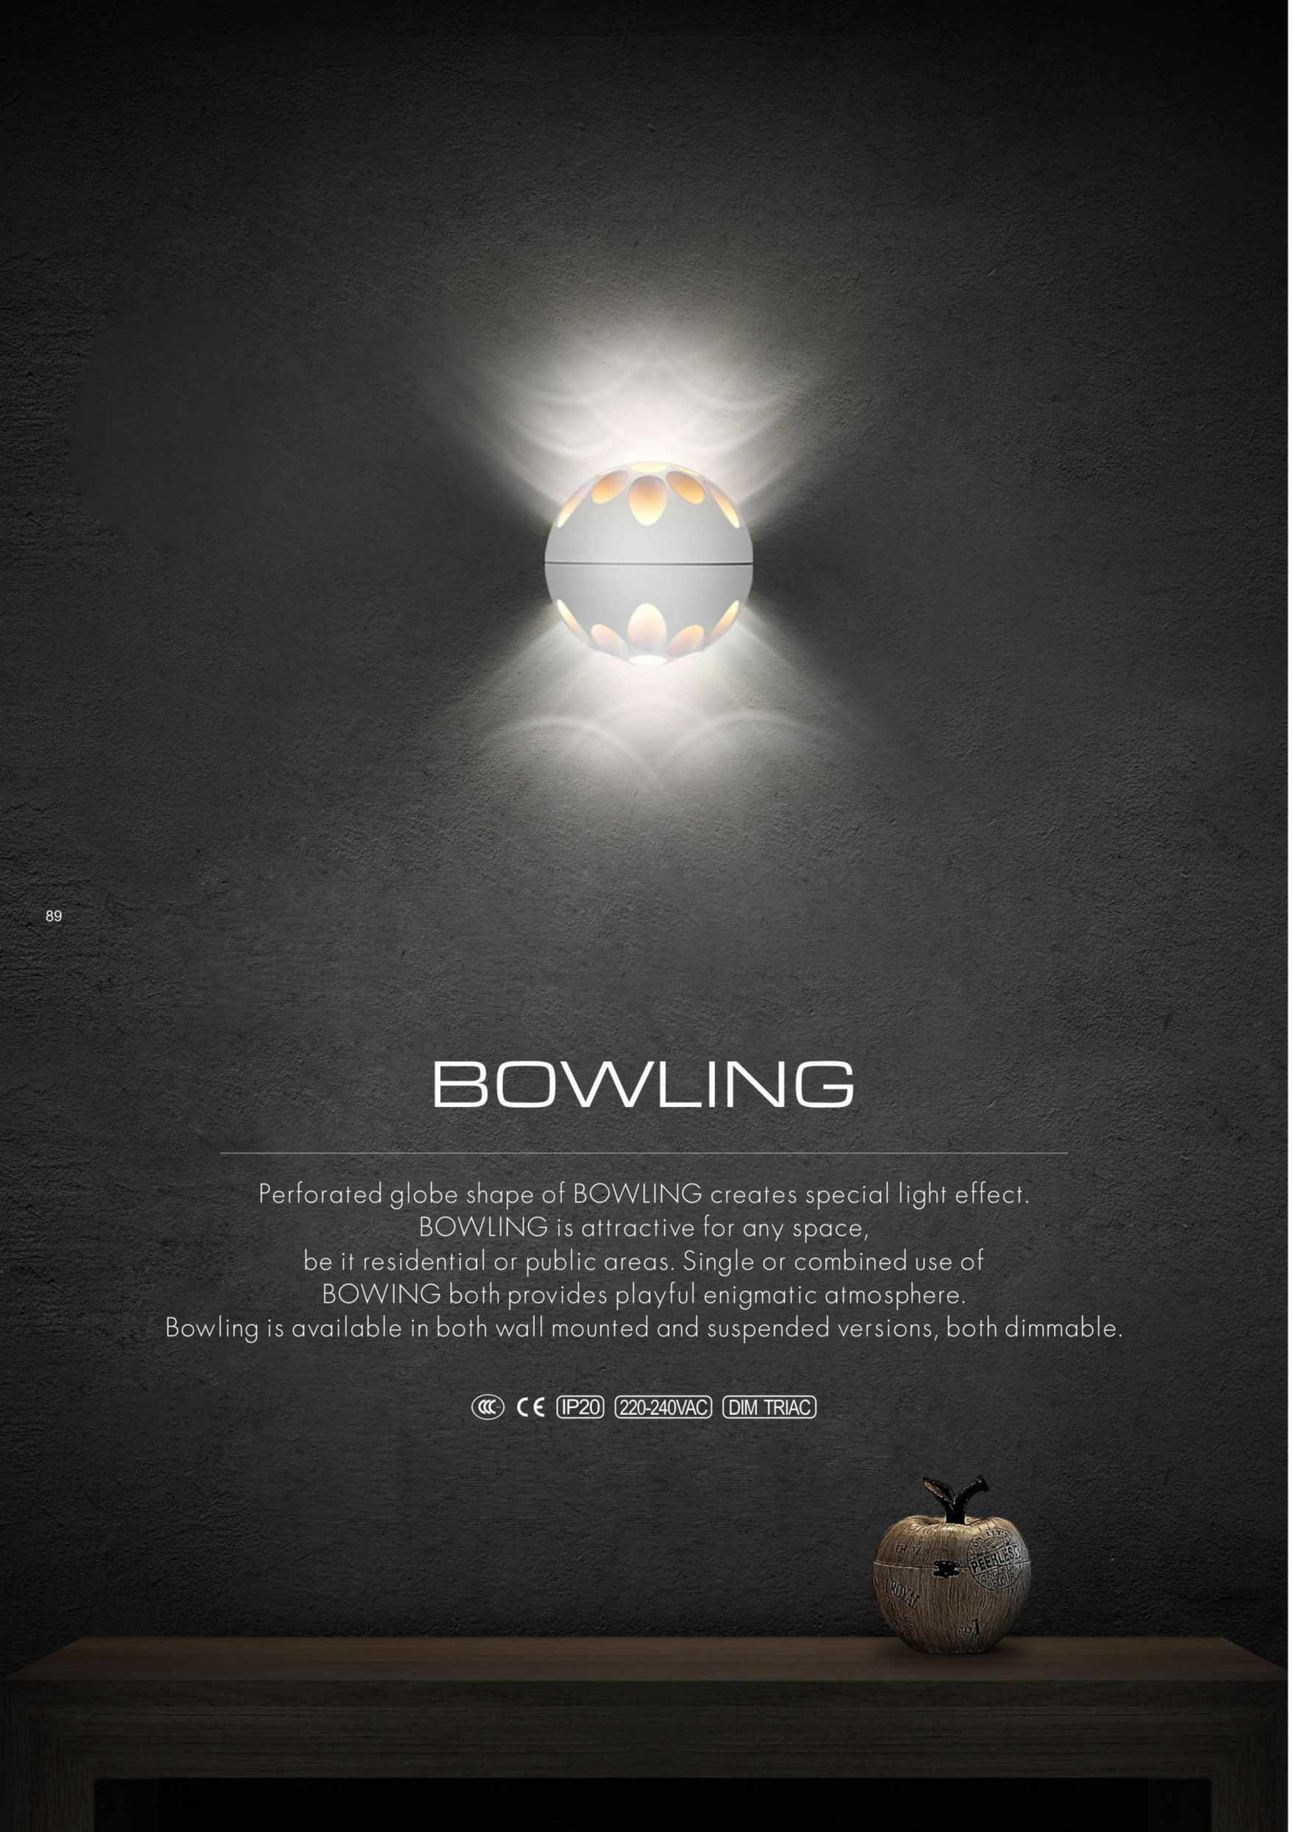

BOWLING

Perforated globe shape of BOWLING creates special light effect.
BOWLING is attractive for any space,
be it residential or public areas. Single or combined use of
BOWING both provides playful enigmatic atmosphere.
Bowling is available in both wall mounted and suspended versions, both dimmable.

CE IP20 220-240VAC DIM TRIAC

P

W

BOWLING W

LED POWER: 12.6W
CRI: 80
SYSTEM POWER: 16W
OUTPUT: 591Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø135*107mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
421514DT

421514DT

BOWLING P

LED POWER: 12.6W
CRI: 80
SYSTEM POWER: 16W
OUTPUT: 642Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø135*137mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
311214DT

311214DT

INTERIOR CEILING SUSPENDEDINTERIOR WALL SURFACE

ROUND

CLASSIC

CLASSIC is more than just a chandelier but rather a new concept,
where include our inspiration with creative process,
allowing the light fitting to be perfectly integrated with interior design.
The result of our work is Classic, constructed from slim metal
rods that forms a lighting sculpture.
CLASSIC is available in round and ellipse versions.
This marvelous chandelier is the best choice for hotel lobbies,
restaurants, halls and boutiques.

CE IP20 220-240VAC DIM 1-10V

ELLIPSE

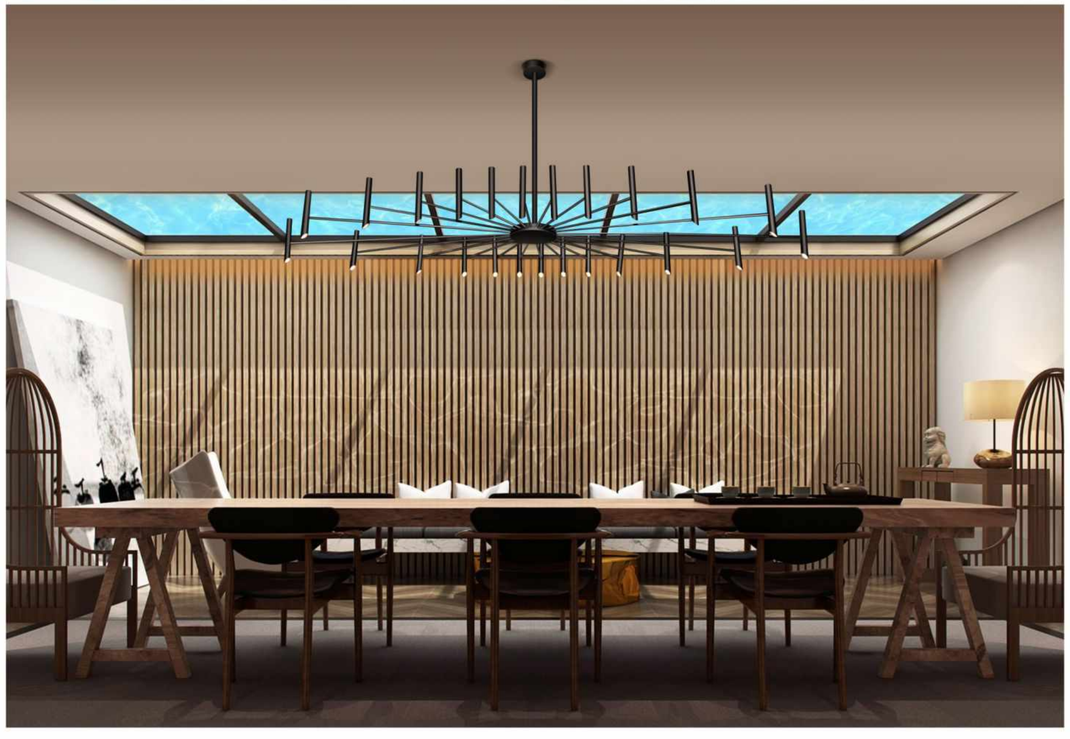

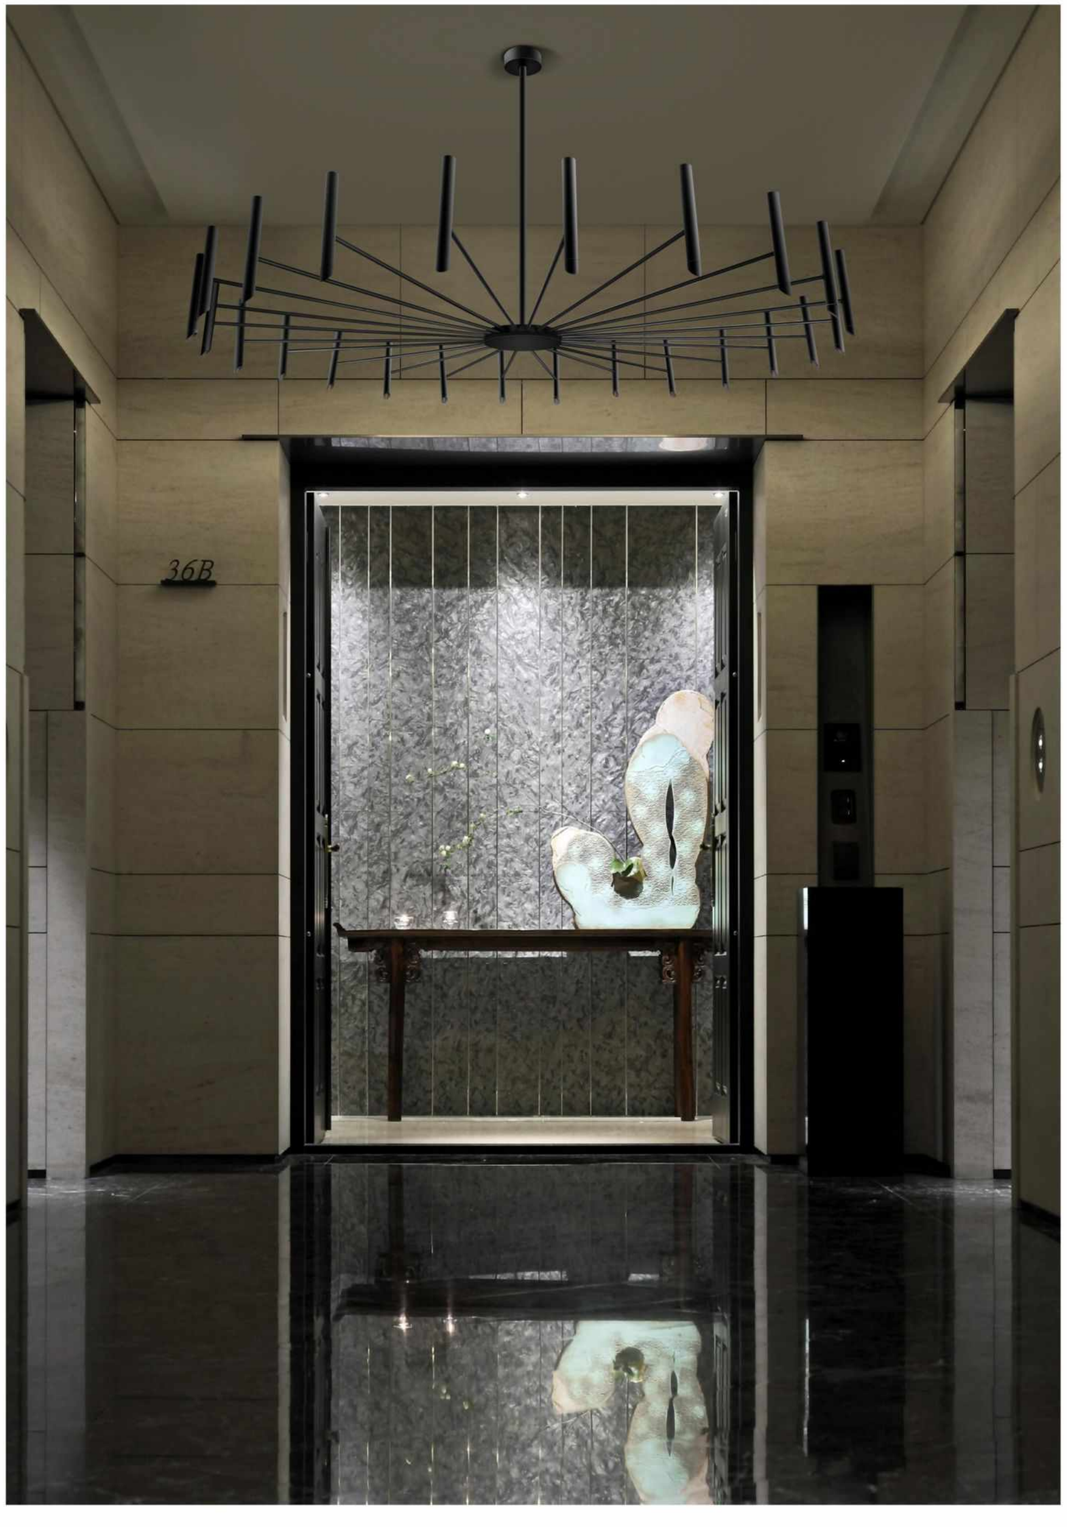

CLASSIC ROUND

LED POWER: 24*2.2W+10.5W
CRI: 90
SYSTEM POWER: 53.8W+11.4W
OUTPUT: 24*166Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø2000*1033mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
311517DX

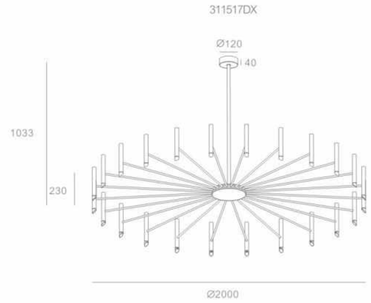

CLASSIC ELLIPSE

LED POWER: 24*2.2W+10.5W
CRI: 90
SYSTEM POWER: 53.8W+11.4W
OUTPUT: 24*166Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 2500*950*1033mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
311617DX

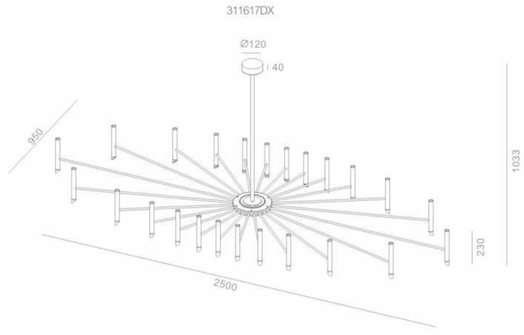

ANGLE 35°



2.2W 35° 3000K



2.2W 35° 3000K



COMET

This marvelous spot is presented with various selections: with or without frame, direct or adjustable, surfaced mounted or pendant versions. Deeply installed LED source provides perdect anti-glare effect. Thanks to narrow beam angle, just 15 , COMET creates special Intimate atmosphere to any environment, playing with light and shade.

IP20 220-240VAC DIM TRIAC

P

306914A

COMET P

LED POWER: UP:9.6W DOWM:8.4W
CRI: 90
SYSTEM POWER: 21.2W
OUTPUT: 353Lm+480Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø600*40.5mm
HOLE SIZE: /

306914A



ANGLE 15°



8.4W 15° 3000K



8.4W 15° 3000K



RECOMMEND

ON/OFF
306914A

OTHER VERSIONS:

DIM TRIAC
306914DT

CORONA

Unique chandelier with 3 or 5 globes for
choice has become the best
selection for dining rooms, restaurants, coffee shops.

CE IP20 220-240VAC

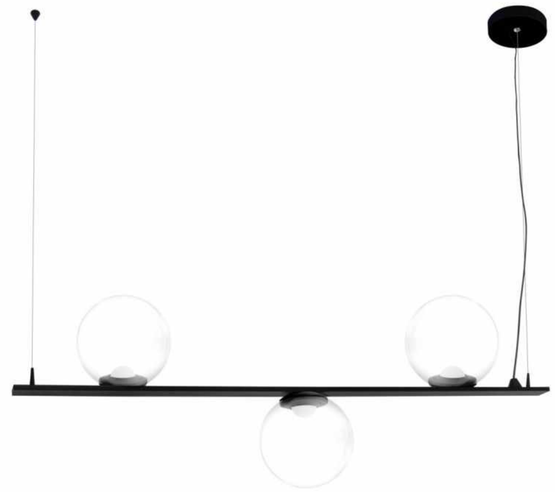

P3

CORONA P3

LED POWER:3*4.2W
CRI: 90
SYSTEM POWER:15.4W
OUTPUT: 715Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 900*150*312mm
HOLE SIZE: /

L

311915A

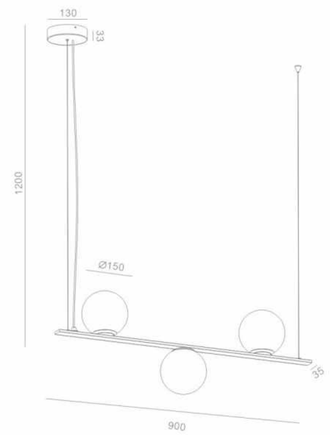

P5

312015A

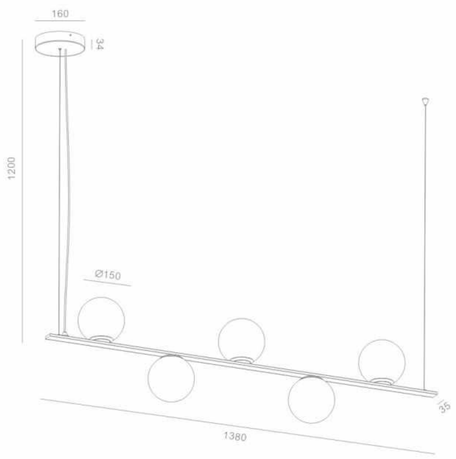

CORONA P5

LED POWER:5*4.2W
CRI: 90
SYSTEM POWER:25W
OUTPUT: 1250Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1380*150*312mm
HOLE SIZE: /

L

DARDY

DARDY is much more than just a lamp,
but rather innovative design
concept in lighting, integration of lighting fitting into the interior design.
DARDY is a pendant light collection constructed from
slim wires and combination of lighting fittings with different shapes.
DARDY is available with 3 different sizes as long as lamps are available in 3 shapes.
The artistic combination of different configurations can bring absolutely
new decorative effect to any room. Recommended for both residential
and hospitality projects applications.

IP20 220-240VAC

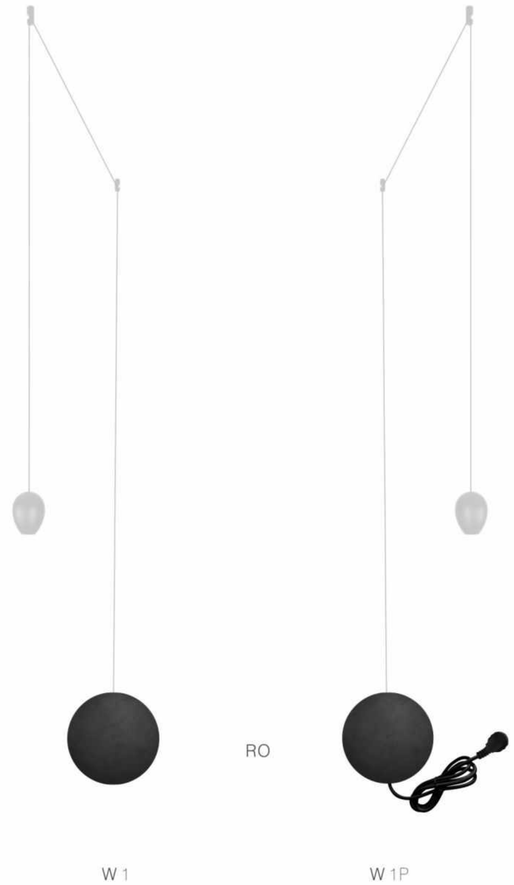

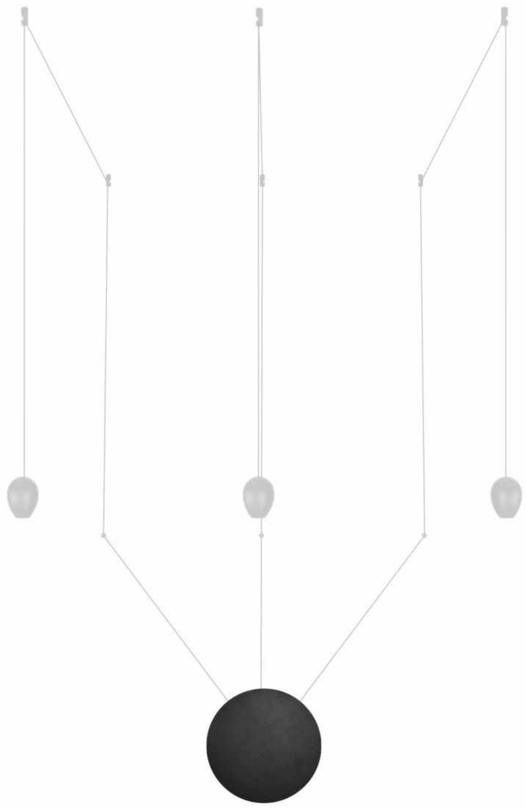

W 3

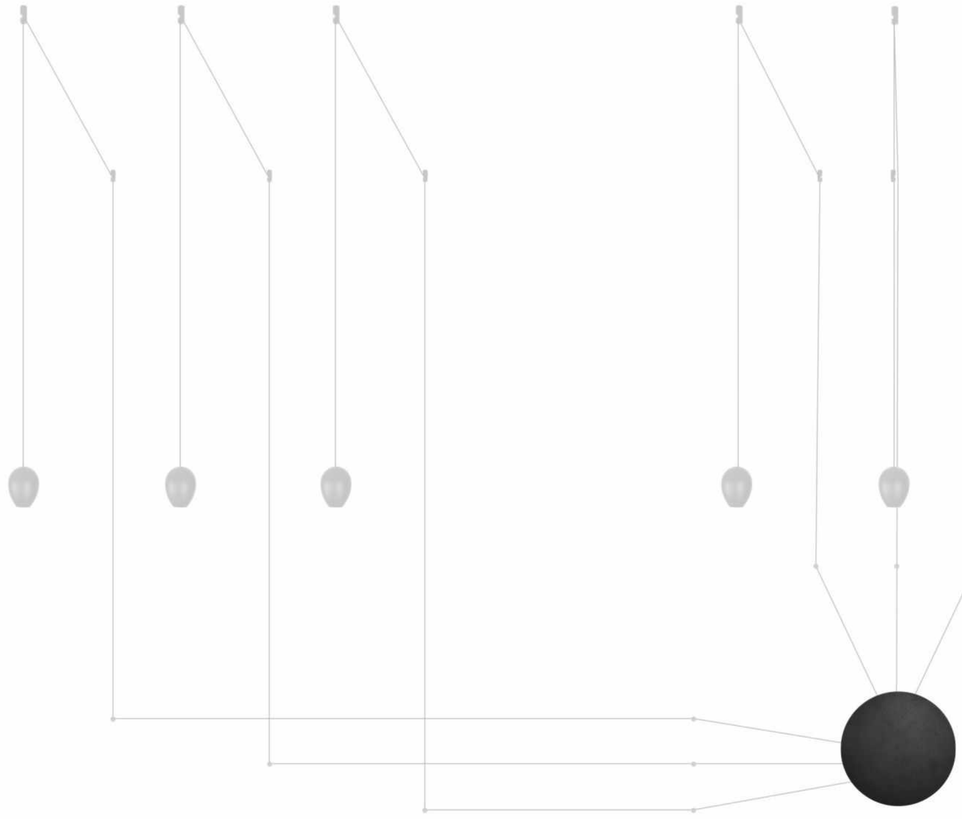

W 6

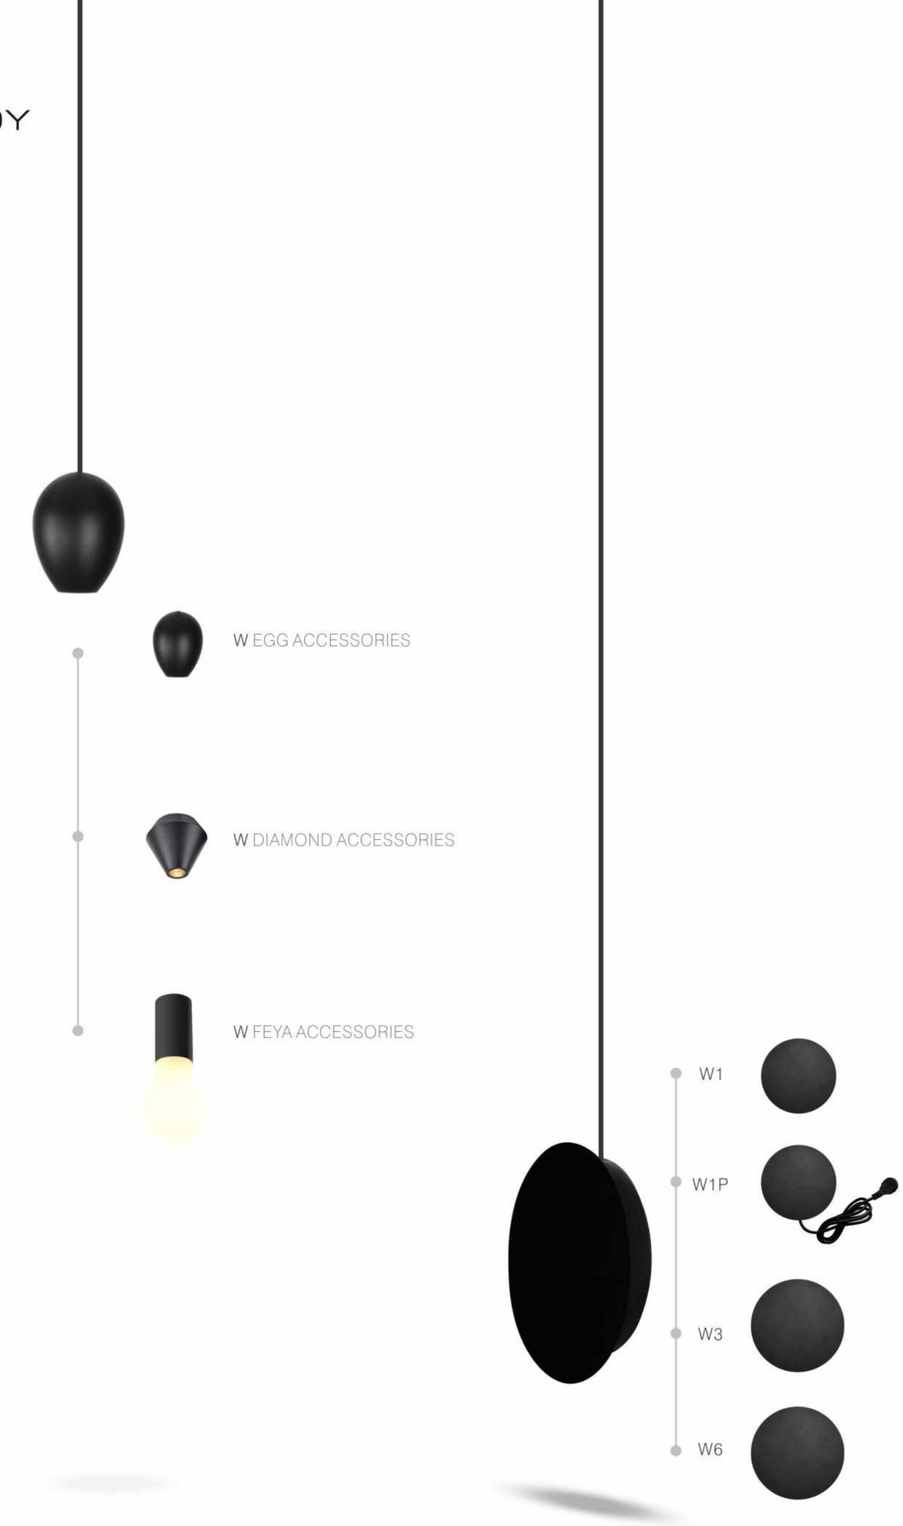

FREE COMBINATION

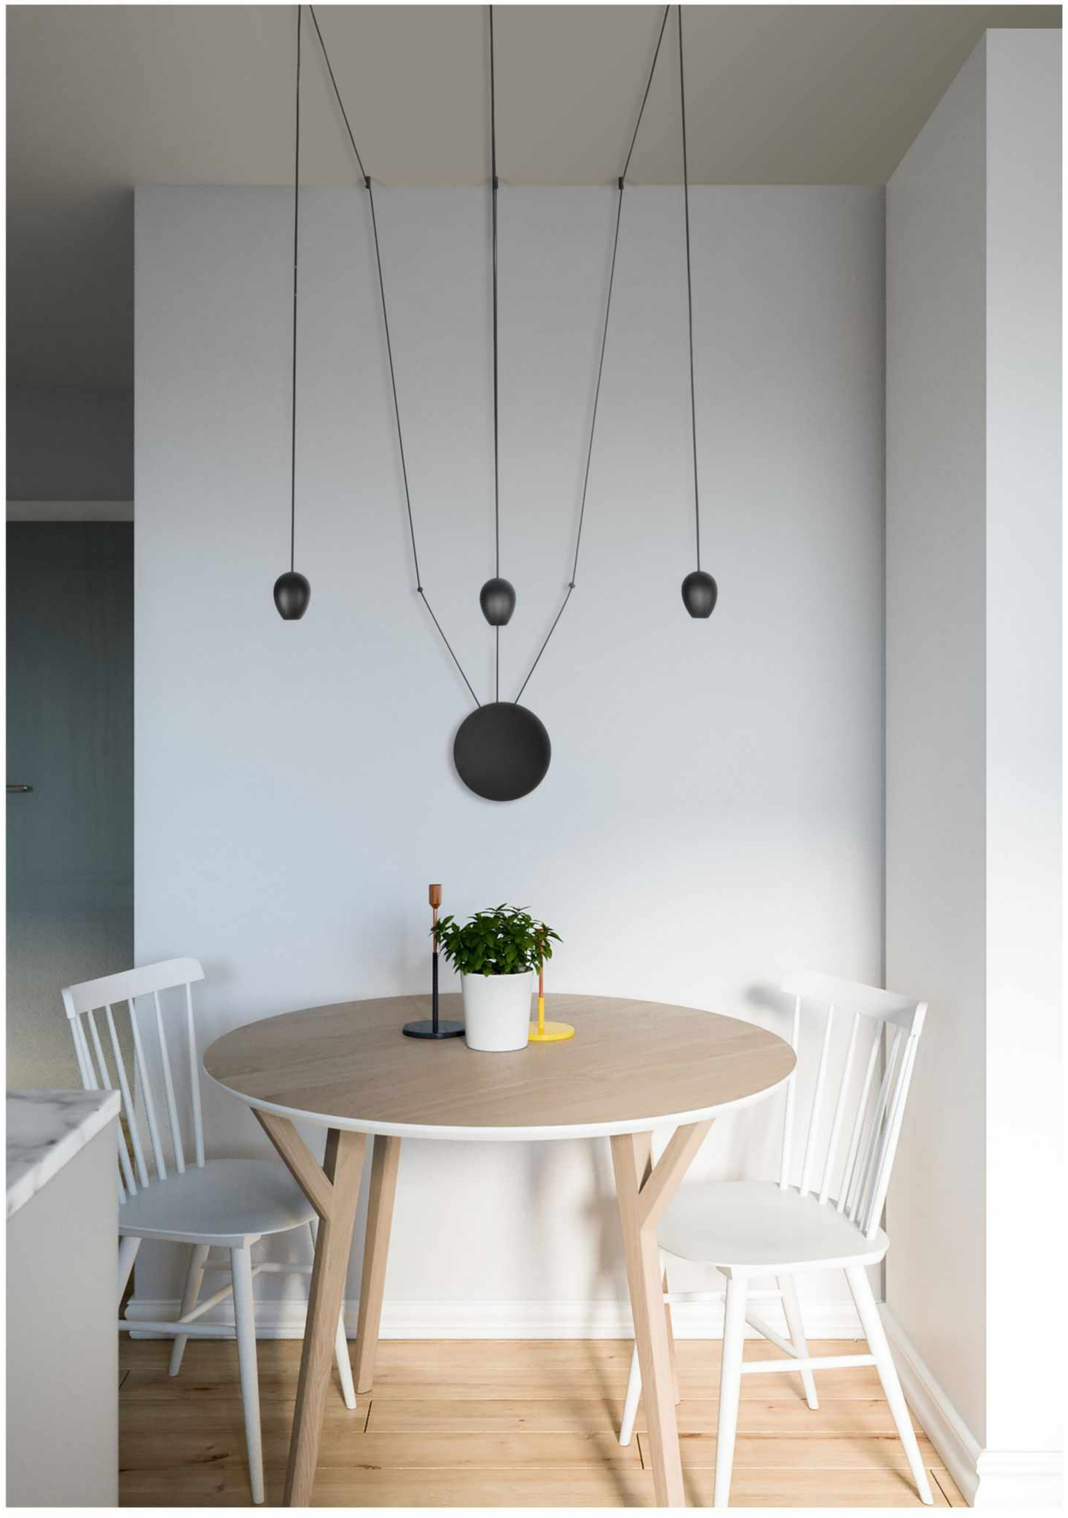

DARDY FEYA

001705

LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 3W
OUTPUT: 96Lm/3000K
INPUT: 700mA
DIMENSION: Ø60*143mm
HOLE SIZE: /

COLOR FINISHINGS:

PAW

DARDY DIAMOND /EGG

001706 001704

LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 3W
OUTPUT: 158Lm/3000K
INPUT: 700mA
DIMENSION: Ø73*68mm/Ø60*78mm
HOLE SIZE: /



COLOR FINISHINGS:

PAW PAW

DARDY W 1

INPUT: 220-240VAC
DIMENSION: Ø130*25mm
HOLE SIZE: /

001709

DARDY W 1P

INPUT: 220-240VAC
DIMENSION: Ø130*25mm
HOLE SIZE: /

001703



DARDY W 3

INPUT: 220-240VAC
DIMENSION: Ø240*36.5mm
HOLE SIZE: /

001710

DARDY W 6

INPUT: 220-240VAC
DIMENSION: Ø240*36.5mm
HOLE SIZE: /

001711

COLOR FINISHINGS:

PAW PAW

EGLASS

This splendid chandelier fuses beauty and geometry with lighting.
6 stone-shaped frosted glass lamps are hung with different heights.
This perfect composition of spheres, suspended in the air via slim cables,
play with the space, giving enigmatic atmosphere to the room.
Recommended both for residential and public areas.

IP20 220-240VAC

EGLASS

LED POWER: 6*2.2W
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 125*71*Ø395mm
HOLE SIZE: /

L

321377A



ELISA

Elegance and functionality are key words to describe ELISA pendant collection.
ELISA has timeless design and can easily match both classic and modern style of the environment.
This splendid series is a great choice for dining and coffee table lighting.
3 product sizes are available for choice.
DIM2WARM function can be chosen as an option.

CE IP20 100/220-240VAC DIM COLOR DIM TRIAC DIM 1-10V

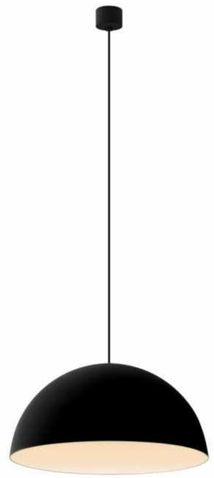

300 DO / 300

400 DO / 400

600 DO / 600

ELISA 300 DO / 400 DO / 600DO

Suggestions for supporting use in the above products

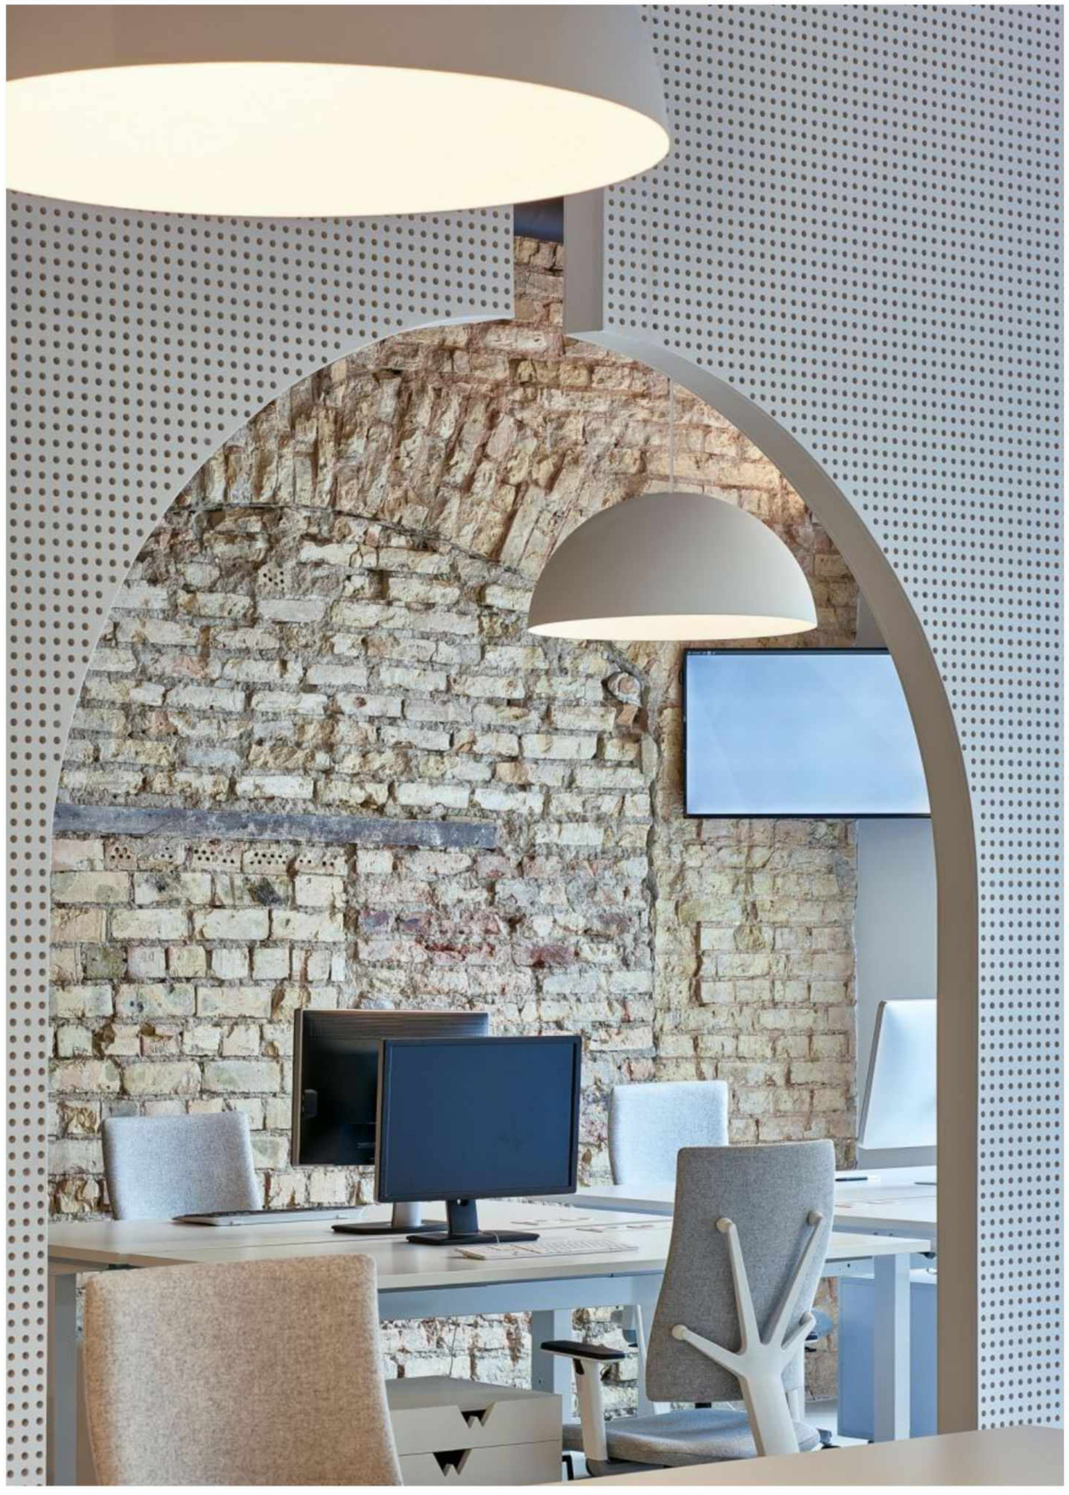

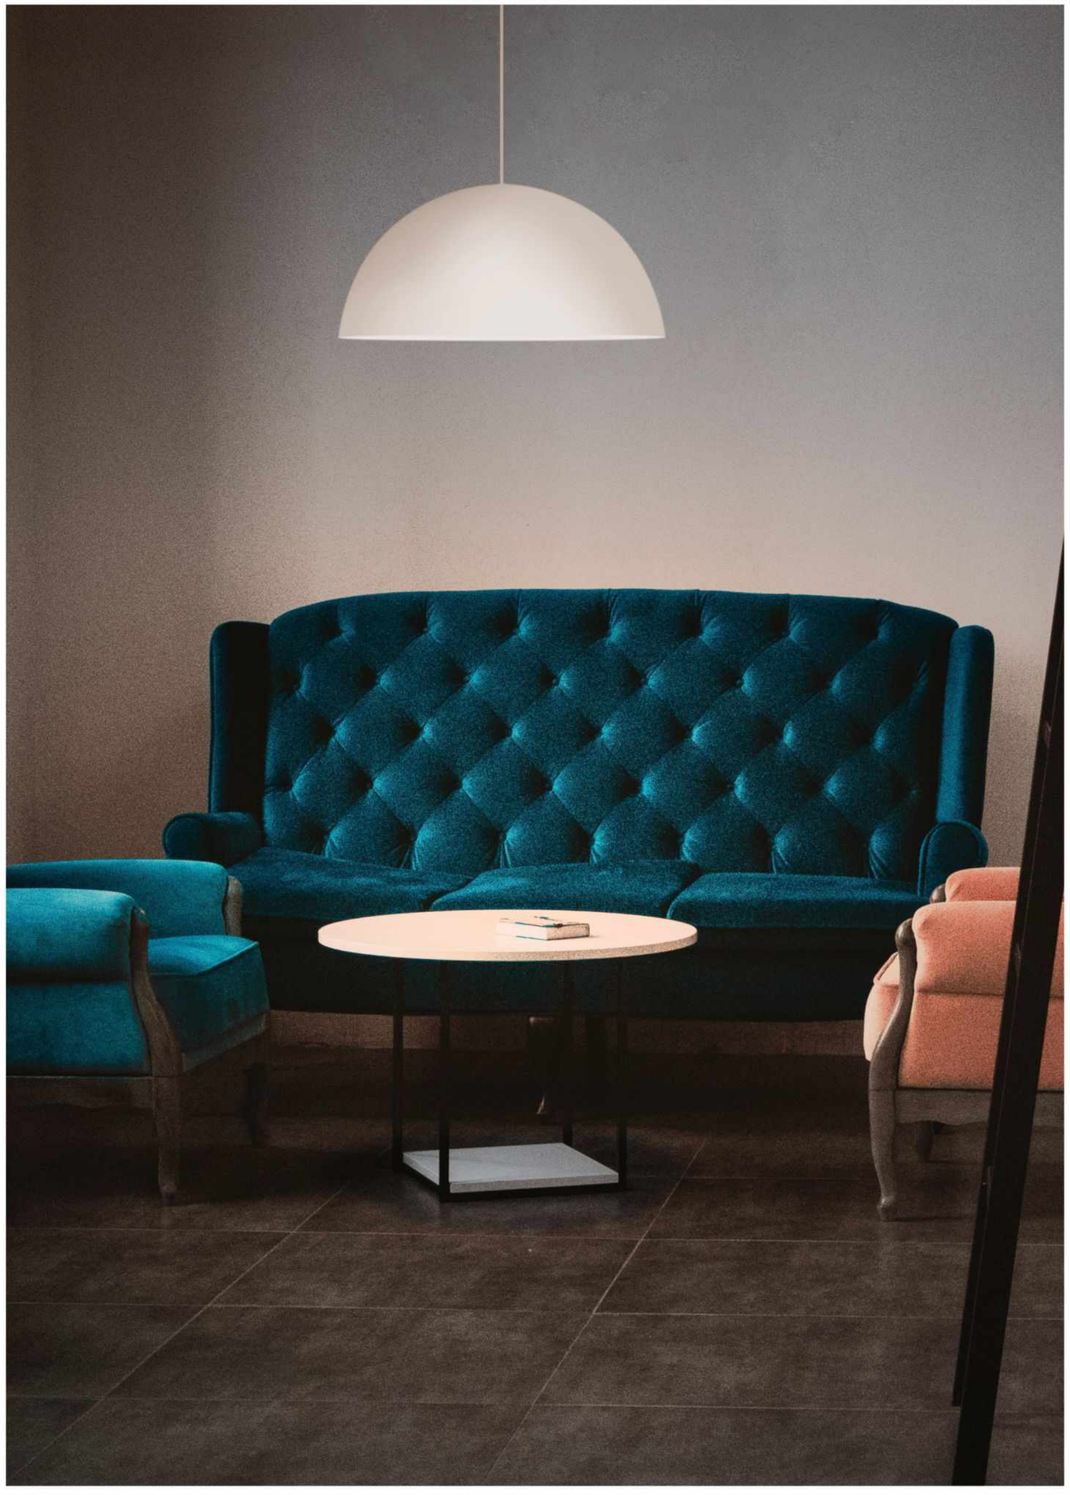

ELISA 300 DO

LED POWER: 14.7W
CRI: 90
SYSTEM POWER: 17.5W
OUTPUT: 1015Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø300*150mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325414DO

325414DO

ELISA 300

LED POWER: 15.5W
CRI: 80
SYSTEM POWER: 18.2W
OUTPUT: 1053Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø300*150mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
323014DT

323014DT

ELISA 400 DO

LED POWER: 23.5W
CRI: 90
SYSTEM POWER: 28W
OUTPUT: 1737Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø400*200mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325314DO

325314DO

ELISA 400

LED POWER: 25.3W
CRI: 80
SYSTEM POWER: 31.6W
OUTPUT: 2116Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø400*200mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
322914DX

322914DX

ELISA 600 DO

LED POWER: 43W
CRI: 90
SYSTEM POWER: 49W
OUTPUT: 2580Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø600*300mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325514DO

325514DO

ELISA 600

LED POWER: 40.7W
CRI: 80
SYSTEM POWER: 49W
OUTPUT: 3297Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø600*300mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323114DX

323114DX



COLOR FINISHINGS:

PAB

PAW

G4

G11

FAIRY

FAIRY G is a transparent glass globe fixed on long cord,
its simple and pure design will bring light
aerial decorative effect to any room.
Available in 2 different diameters and different colors.

IP20 100-240VAC

FAIRY G4

323919

LED POWER: 3.8W
CRI: 90
SYSTEM POWER: 4.1W
OUTPUT: 170Lm/3000K
INPUT: 100-240VAC
DIMENSION: Ø150mm
HOLE SIZE: /

FAIRY G11

324019

LED POWER: 9.5W
CRI: 90
SYSTEM POWER: 10.9W
OUTPUT:738Lm/3000K
INPUT: 100-240VAC
DIMENSION: Ø300mm
HOLE SIZE: /

ANGLE 36°



ANGLE 24°



3.8W 36° 3000K



9.5W 24° 3000K



3.8W 36° 3000K



9.5W 24° 3000K



OPTICS:

24°

COLOR FINISHINGS:

WWH WBL WGL

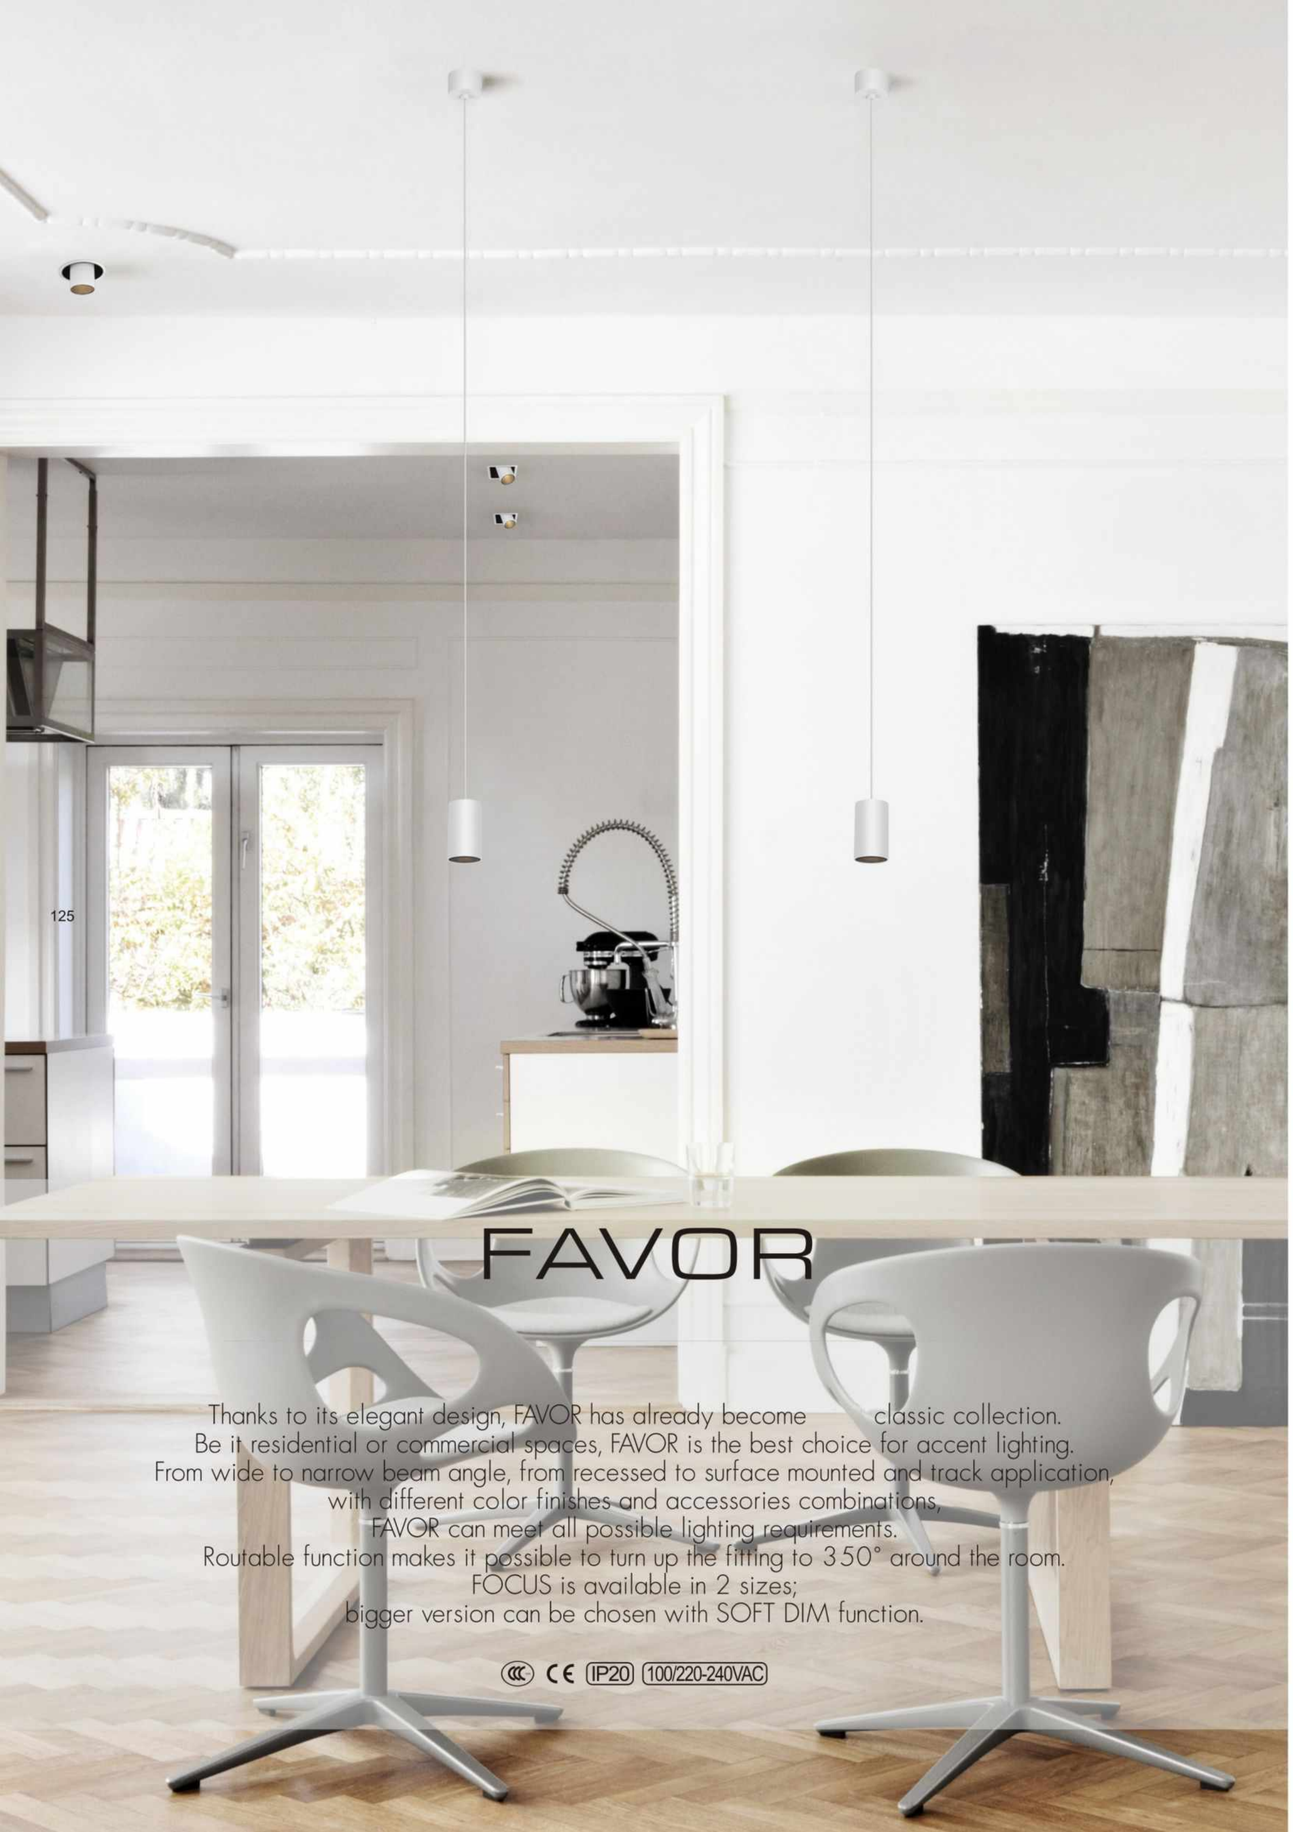

FAVOR

Thanks to its elegant design, FAVOR has already become classic collection.
Be it residential or commercial spaces, FAVOR is the best choice for accent lighting.
From wide to narrow beam angle, from recessed to surface mounted and track application,
with different color finishes and accessories combinations,
FAVOR can meet all possible lighting requirements.
Routable function makes it possible to turn up the fitting to 350° around the room.
FOCUS is available in 2 sizes;
bigger version can be chosen with SOFT DIM function.

CE IP20 100/220-240VAC

P

P+

COLOR FINISHINGS:

PAW

PAB

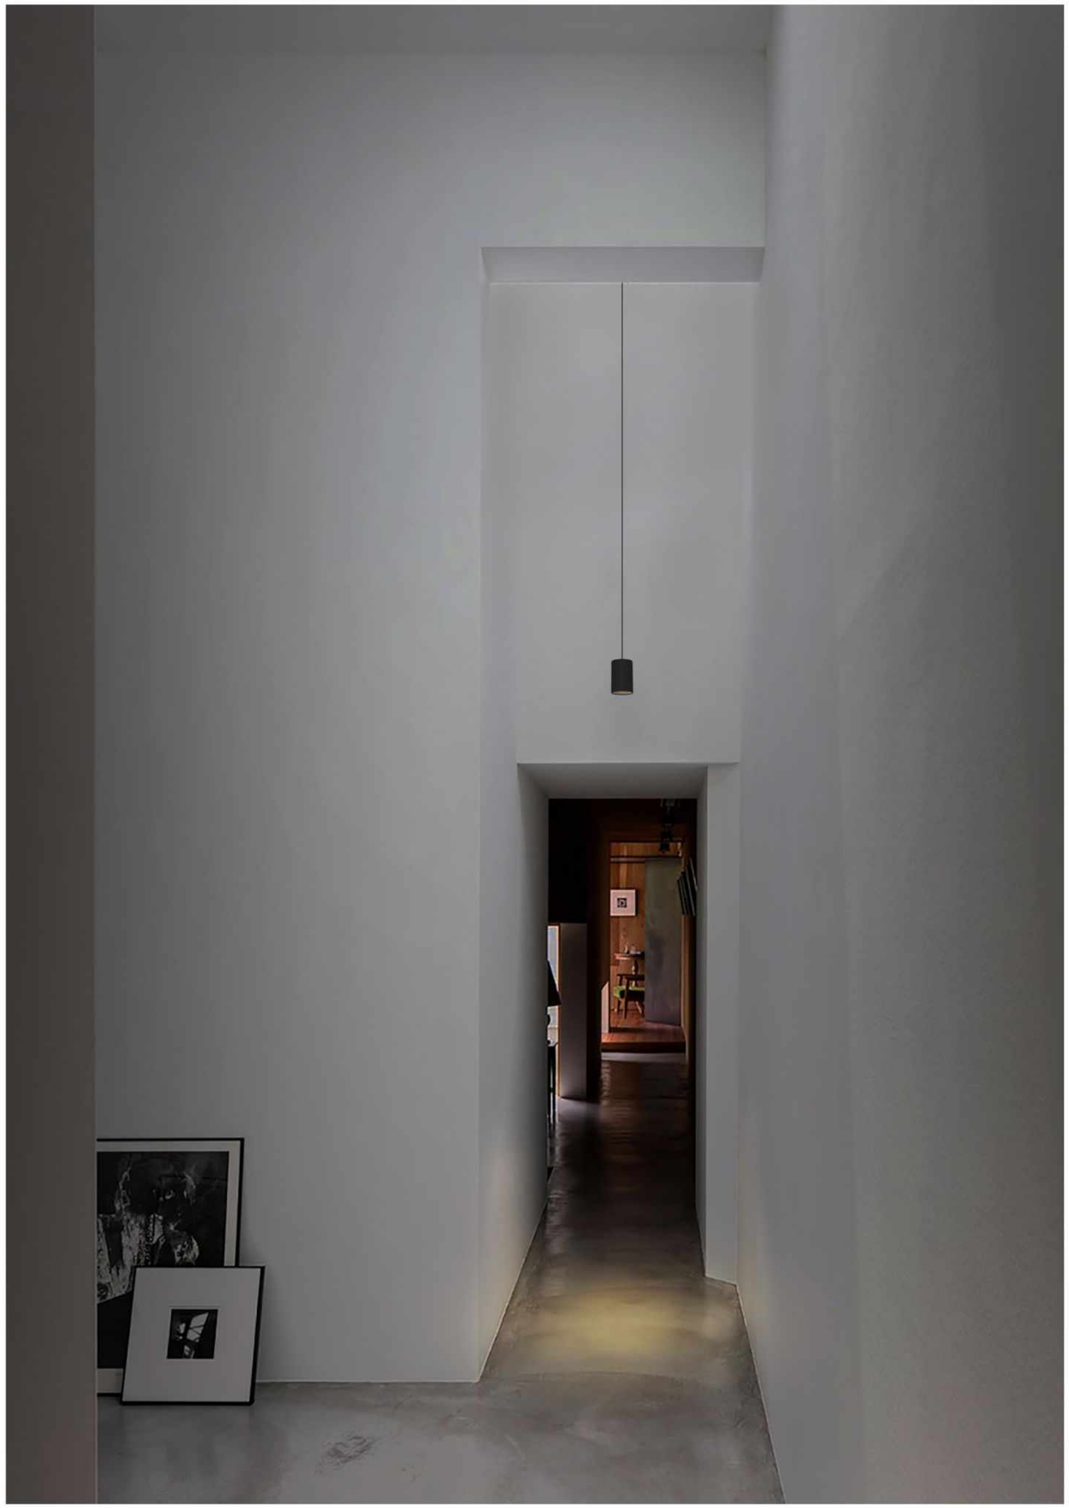

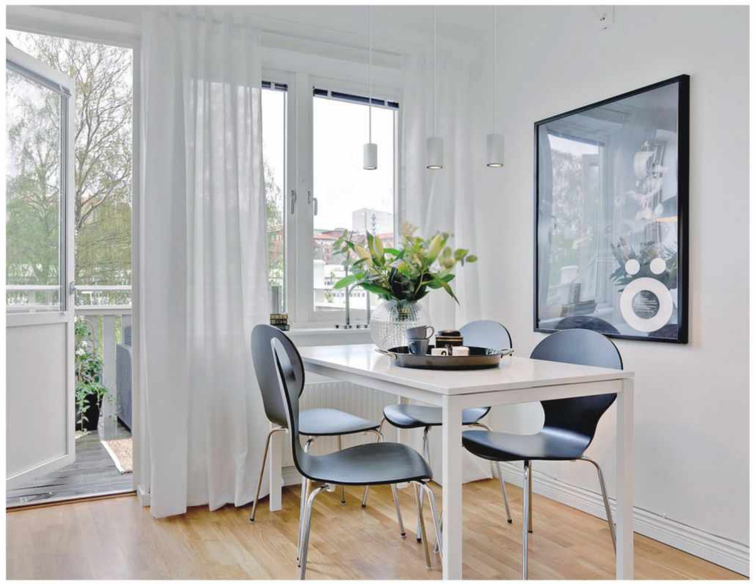

FAVOR P

LED POWER: 3.6W
CRI: 90
SYSTEM POWER: 5.3W
OUTPUT: 180Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø45*75mm
HOLE SIZE: /

ANGLE 25°



ANGLE 19°



3.6W 25 ° 3000K



3.6W 19° 3000K



3.6W 25° 3000K



3.6W 19° 3000K



FAVOR P+

LED POWER: 5.3W
CRI: 90
SYSTEM POWER: 6.4W
OUTPUT: 261Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*90mm
HOLE SIZE: /

ANGLE 32°



ANGLE 18°



5.3W 32° 3000K



5.3W 18° 3000K



5.3W 32° 3000K



5.3W 18° 3000K



FEYA

Vintage looking lamp FEYA is a simple design solution
for both residential and commercial areas.
Available in both surfaced and trimless version,
equipped with E27 lampholder.

IP20 220-240VAC

GLASS

GLASS TRIMLESS

FEYA GLASS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*143mm
HOLE SIZE: /

FEYA GLASS TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*143mm
HOLE SIZE: Ø55mm

ANGLE F



ANGLE F



8W L 3000K



8W L 3000K



8W L 3000K



8W L 3000K



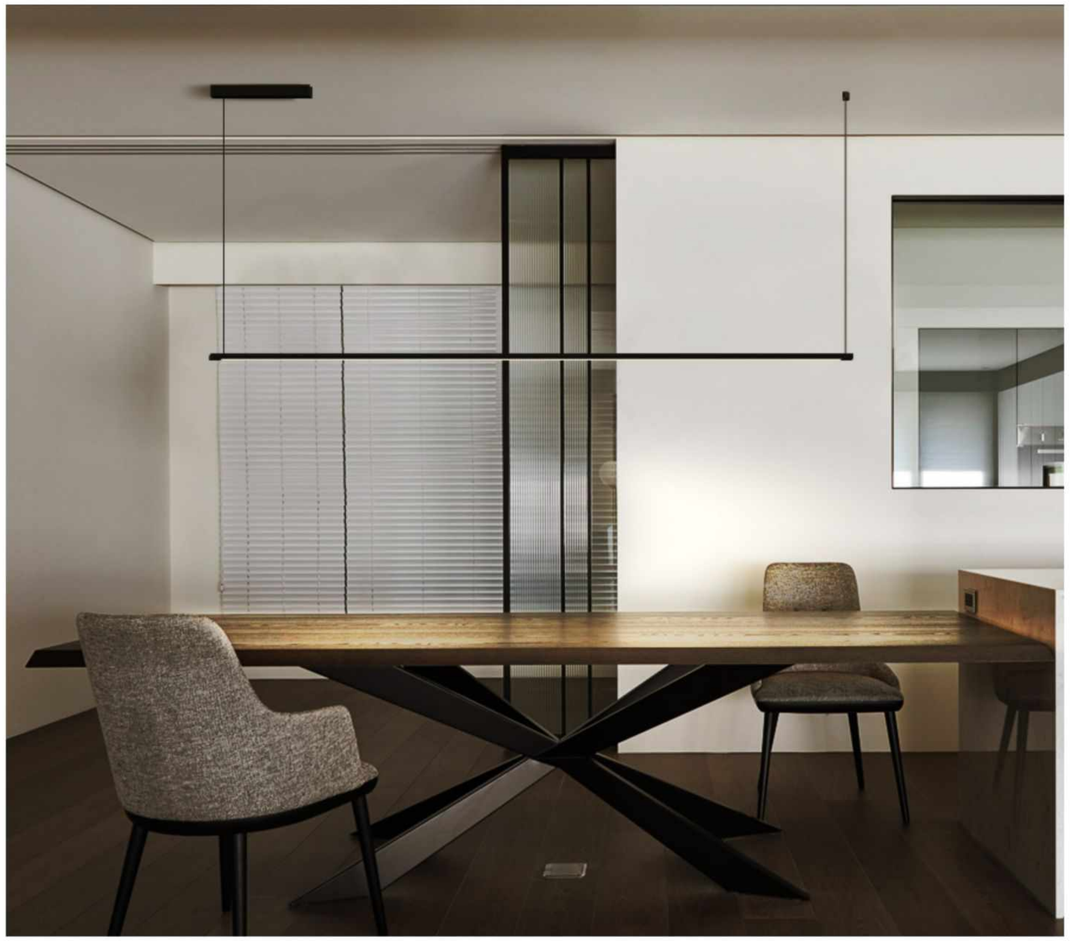

FLASH

FLASH is completely new concept idea of pendant lighting.
This elegant and sophisticated fitting is the best example of artistic and creative vision.
Ultra-thin line, suspended vertically or horizontally,
gives the best creative effect to any room, be it residential or public area.

IP20 220-240VAC

FLASH P SQ

CRI: 90
SYSTEM POWER: 23.3W
OUTPUT: 725Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1552*9*10.5mm
HOLE SIZE: /

L

325614A

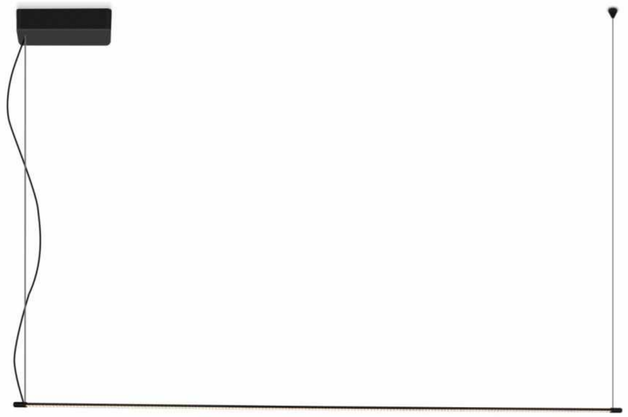

FLASH P

322119A

LED POWER:14.5W
CRI: 90
SYSTEM POWER:16.5W
OUTPUT: 291Lm/3000K
INPUT: 100-240VAC,50/60Hz



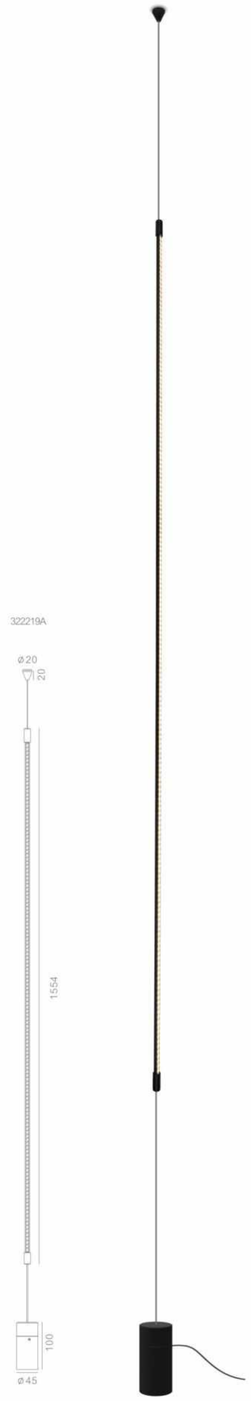

FLASH V

LED POWER:14.5W
CRI: 80
SYSTEM POWER:16.5W
OUTPUT: 291Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø13.4*1554mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW PAB

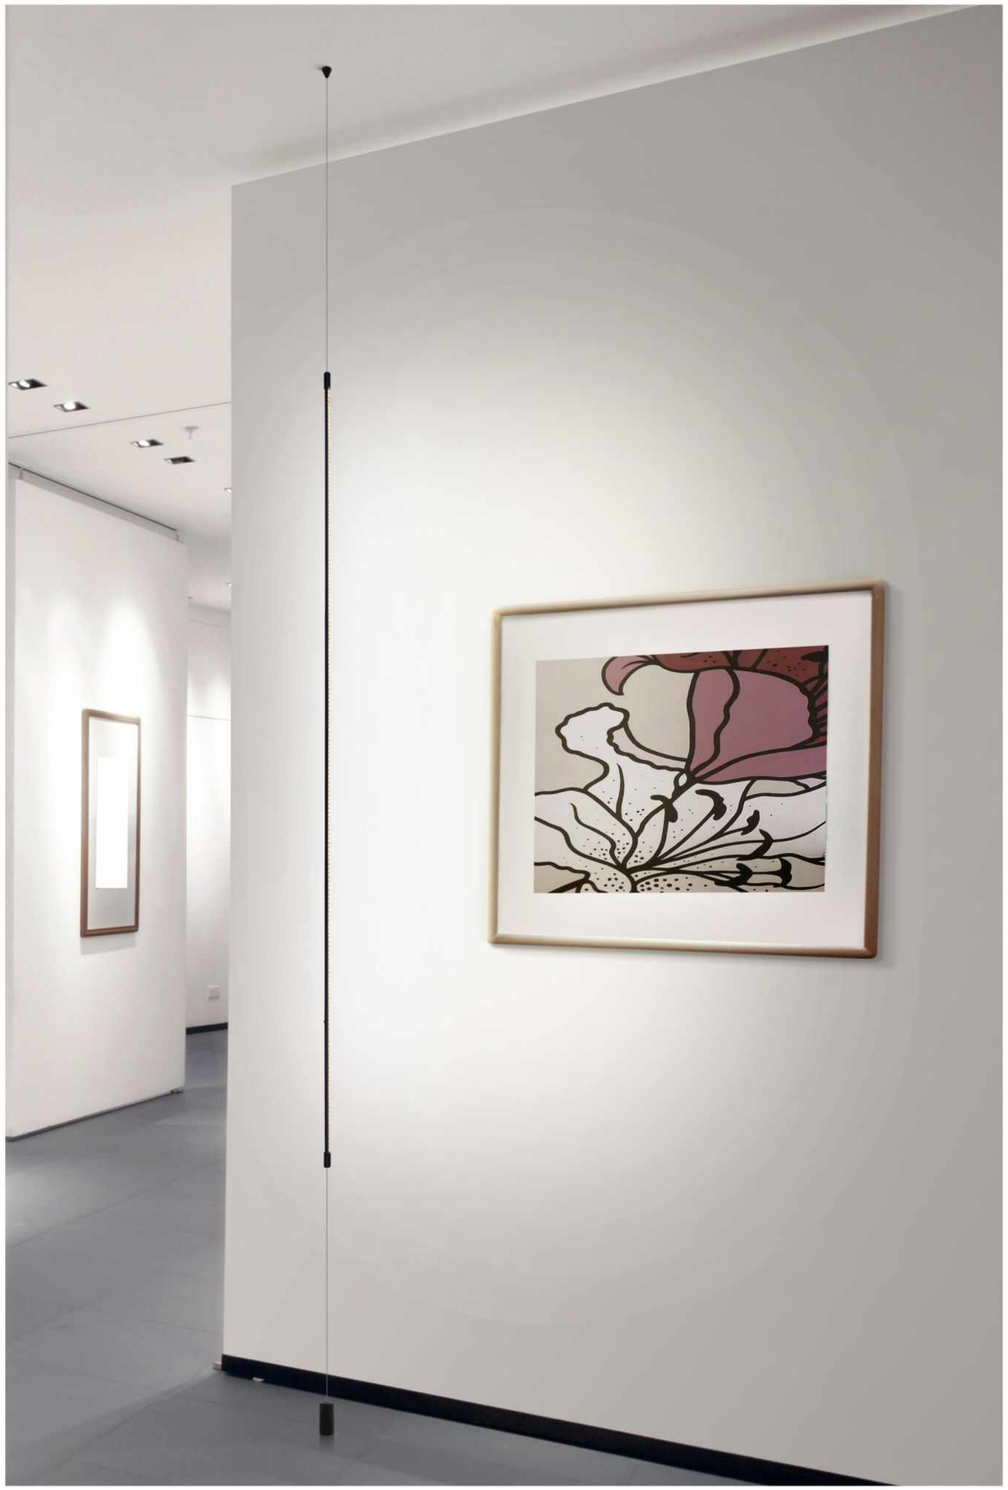

FORMULIA 2.0

Minimalism, elegance and functionality are key words
to describe the new collection FORMULIA.
It was specially designed to meet multiple lighting requirements
for both residential and commercial spaces.
Elegant slim suspended tubes are going in different lengths
for choice: 350 mm, 550 mm, 750 mm.
All versions can be installed with mounting plate or trimless.
FORMULIA L chandelier was created to extend FORMULIA collection.
6 tubes are hung at different heights, providing organic atmosphere to any room.

CCC CE IP20 220-240VAC

350

550

750

350 TRIMLESS

550 TRIMLESS

750 TRIMLESS

FORMULIA L 350 GROUP

FORMULIA L 550 GROUP

FORMULIA 2.0

FORMULIA L 750 GROUP

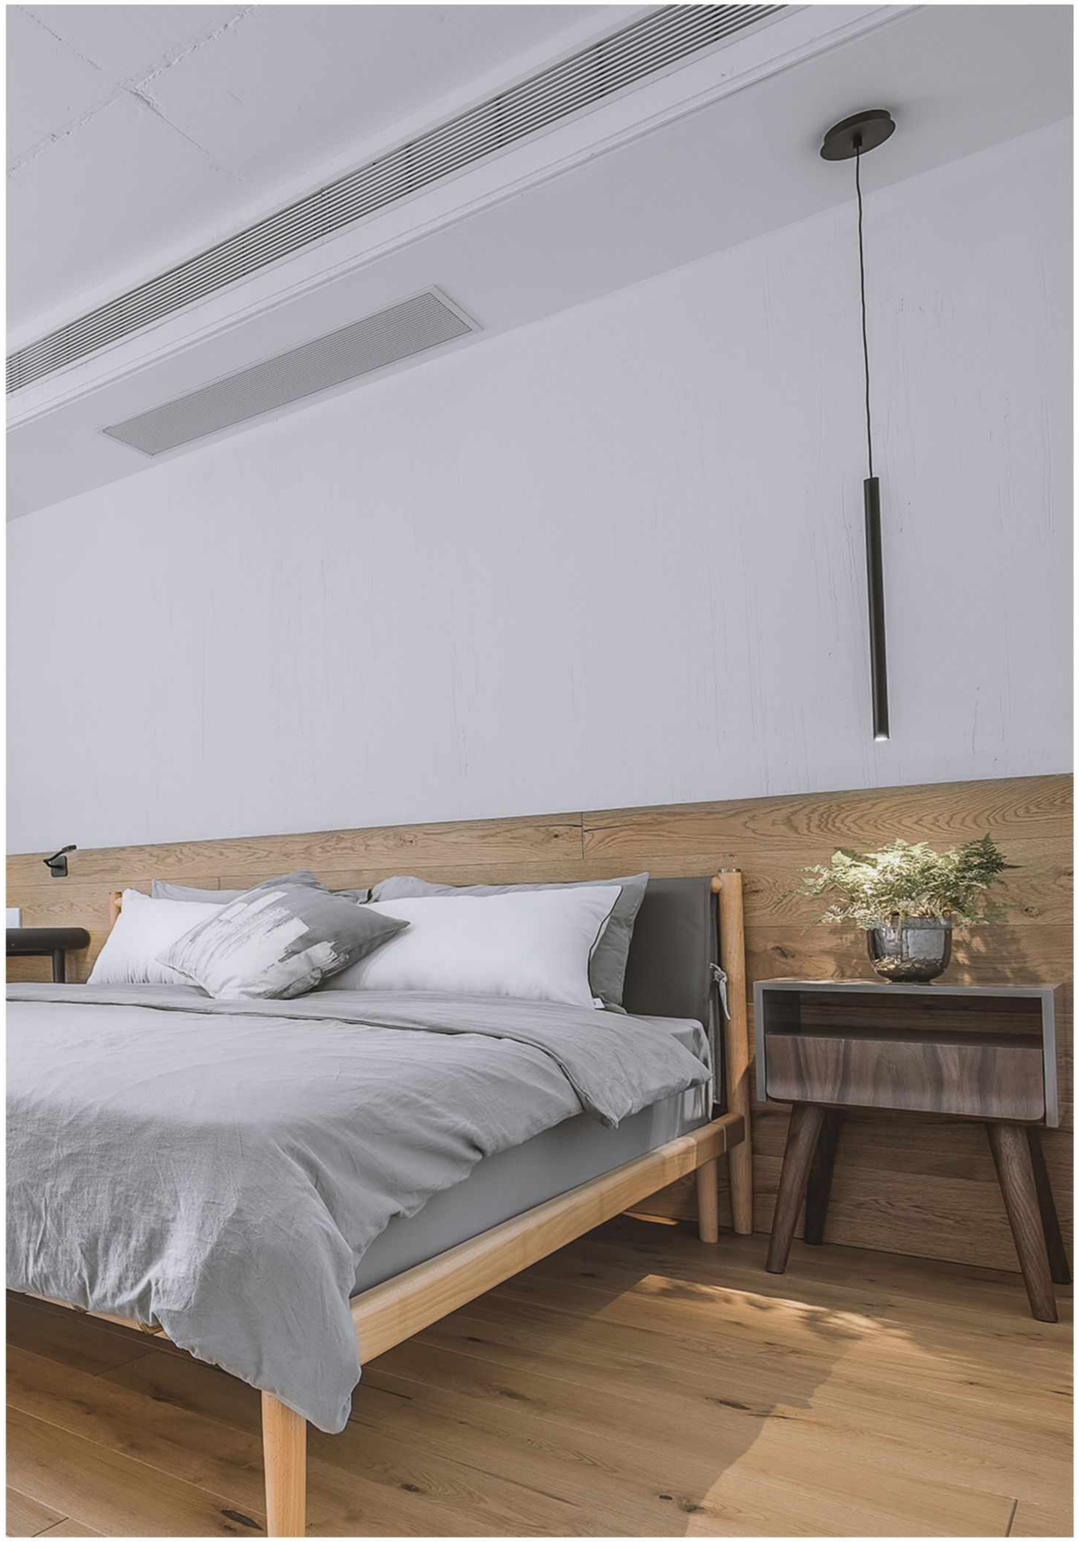

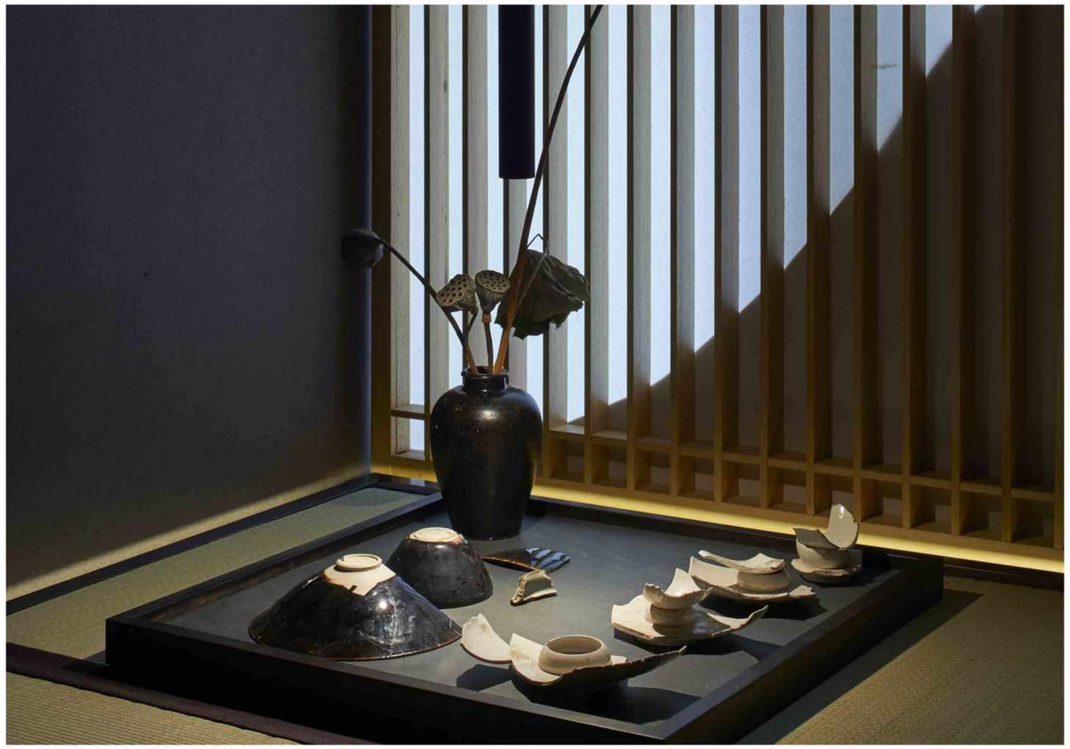

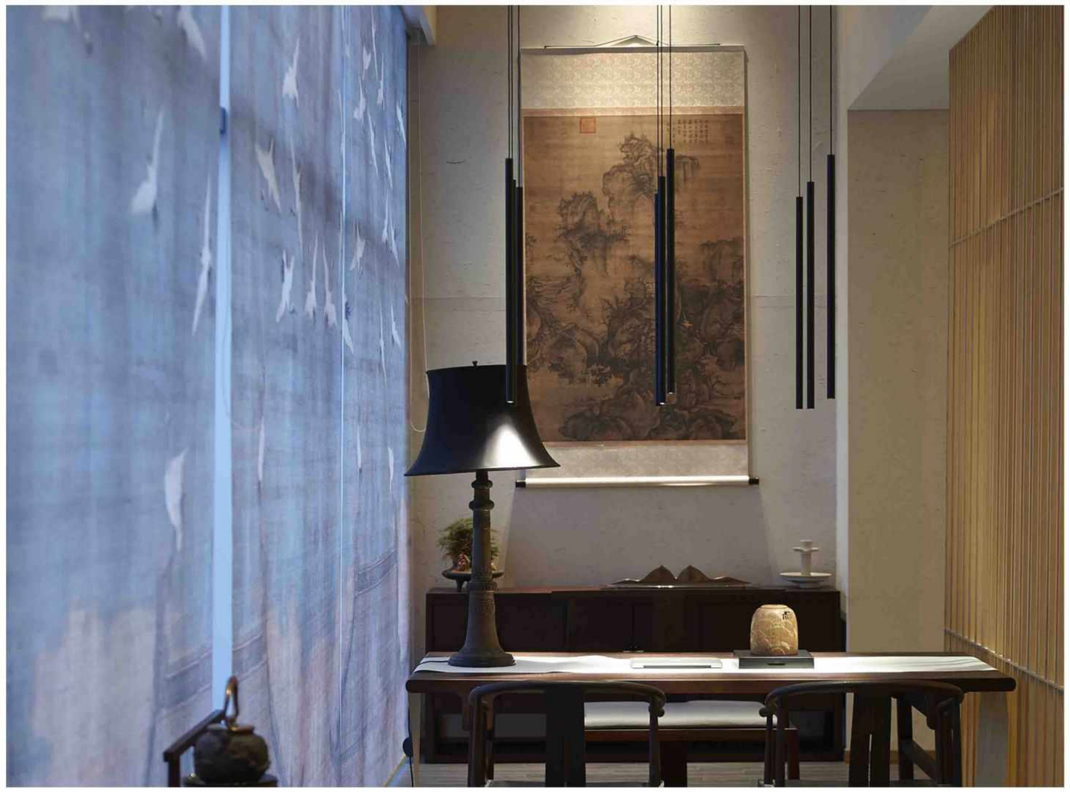

FORMULIA 350 / 550 / 750

LED POWER: 6W
CRI: 90
SYSTEM POWER: 8W
OUTPUT: 379Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*350mm
Ø25*550mm
Ø25*750mm
HOLE SIZE: /

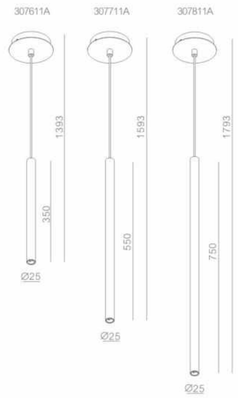

ANGLE 19°



6W 20° 3000K



6W 20° 3000K



FORMULIA 350 TRIMLESS / 550 TRIMLESS / 750 TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 8W
OUTPUT: 379Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*350mm
Ø25*550mm
Ø25*750mm
HOLE SIZE: Ø55mm

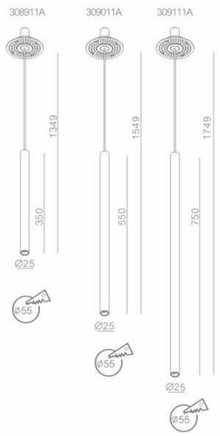

ANGLE 19°



6W 19° 3000K



6W 19° 3000K



FORMULIA L 350 GROUP

LED POWER: 2.2W*6
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60H
DIMENSION: Ø25*350*Ø395mm
HOLE SIZE: /



ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



FORMULIA L 550 GROUP

LED POWER: 2.2W*6
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*550*Ø395mm
HOLE SIZE: /



ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



FORMULIA L 750 GROUP

LED POWER: 2.2W*6
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*750*Ø395mm
HOLE SIZE: /



ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



P 9

P 6

P 3

LOOP

Super unique collection, slim black rings,
floating through the space, providing star sky effect on the ceiling.
The circle of LEDs specially designed to guarantee a uniform
and balanced areole form light effect.
LOOP is available in recessed and suspended versions in 3 dimensions.
Recessed version is equipped with magnet mechanism
for LED source special fixation.

CCC CE IP20 220-240VAC DIM TRIAC

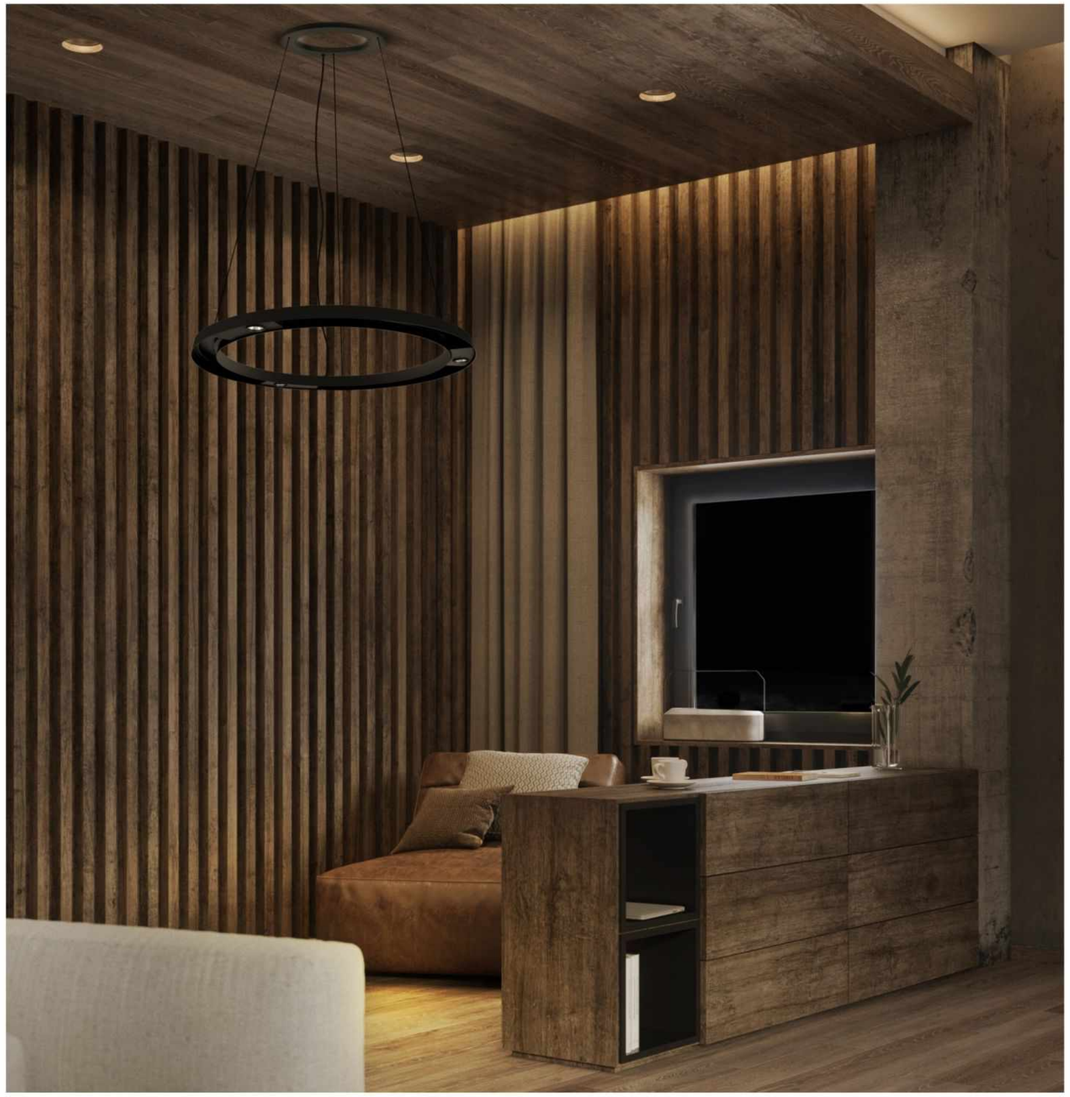

LOOP P 3

LED POWER:3*6.4W
CRI: 90
SYSTEM POWER:22.5W
OUTPUT: 1422Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø700mm
HOLE SIZE: /



OPTICS:

RECOMMEND

DIM TRIAC
304719EDT

LOOP P 6

LED POWER:6*6.4W
CRI: 90
SYSTEM POWER:45W
OUTPUT: 2844Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1200mm
HOLE SIZE: /

OPTICS:

RECOMMEND

DIM TRIAC
304819EDT

LOOP P 9

LED POWER:9*6.4W
CRI: 90
SYSTEM POWER:67.5W
OUTPUT: 4266Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1700mm
HOLE SIZE: /

OPTICS:

RECOMMEND

DIM TRIAC
304919EDT

LOTEL

Simple and elegant LOTEL collection comes
in different length, but they all have one thing in common: thin tubular shape.
LOTEL can be used single
or accompanied by other cylinder to make it directional.
To complete LOTEL range, wall mounted and suspended versions are available.

CE IP20 220-240VAC DIM TRIAC

P 400

P 600

W

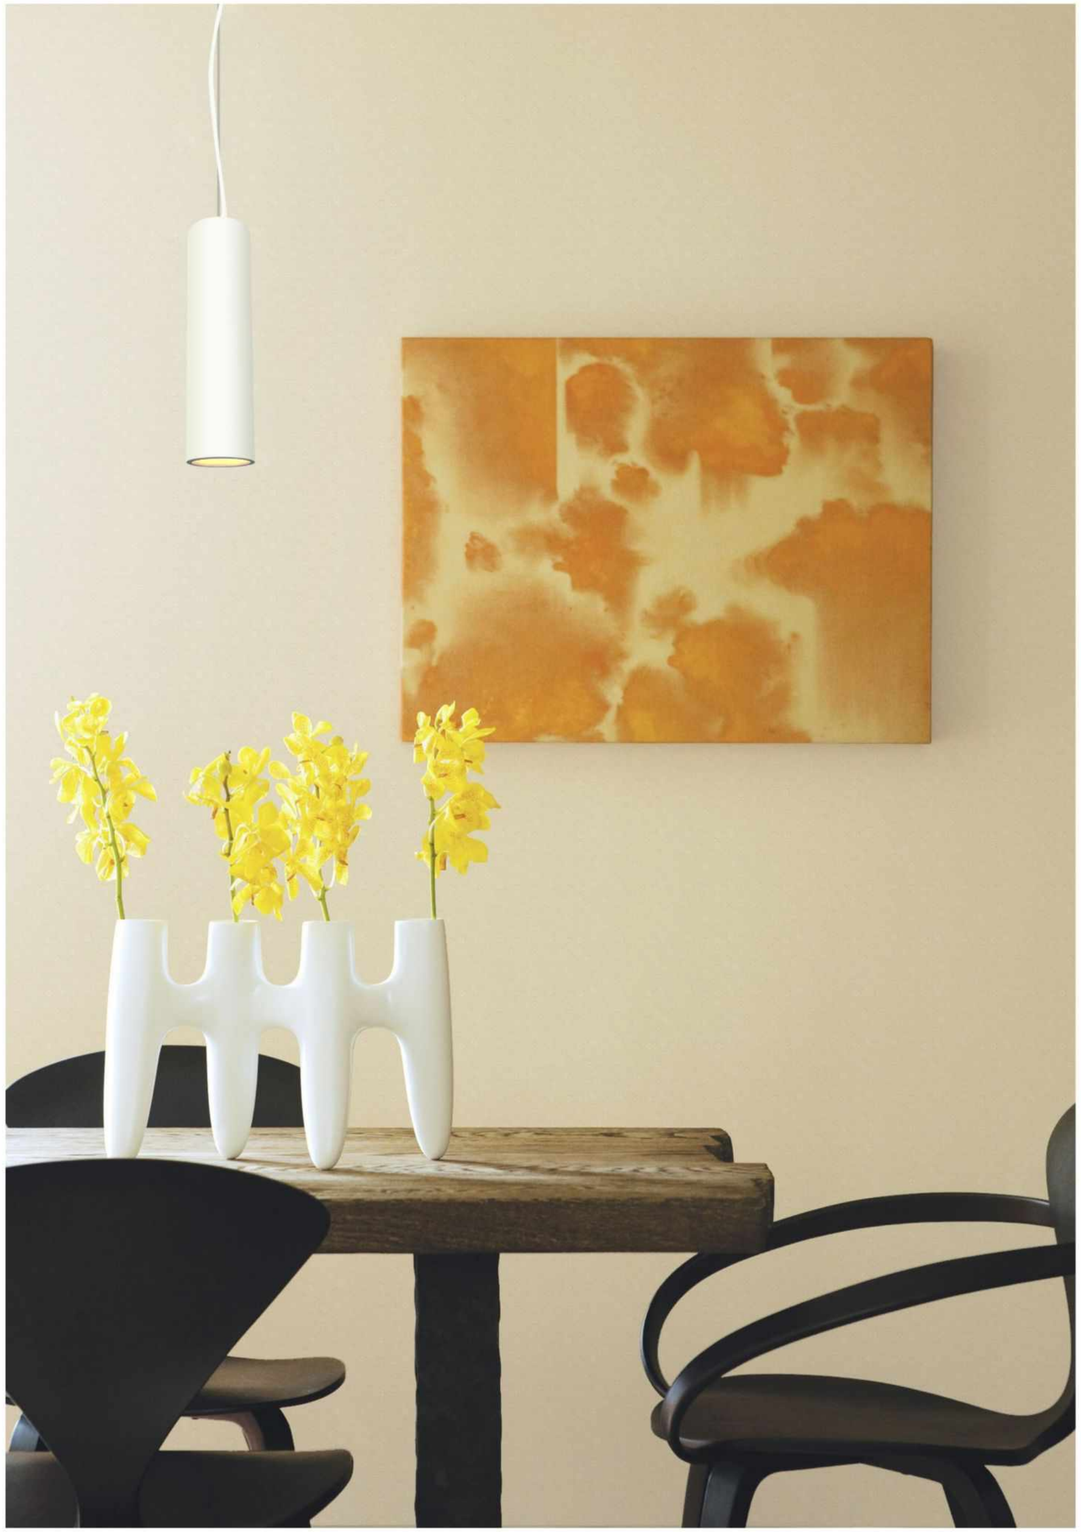

INTERIOR WALL SURFACE

LOTEL P150/ P225 / P300 / P400 / P600

LED POWER: 10.5W
CRI: 90
SYSTEM POWER: 12.4W
OUTPUT: 810Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø86*150mmØ86*225mmØ86*300mm
Ø86*400mmØ86*600mm
HOLE SIZE: /

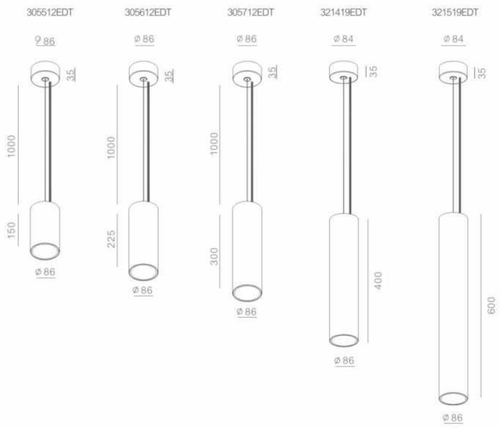

ANGLE 32°



10.5W 32° 3000K



10.5W 32° 3000K



OPTICS:

RECOMMEND

DIM TRIAC 305512EDT | DIM TRIAC 305612EDT | DIM TRIAC 305712EDT | DIM TRIAC 321419EDT | DIM TRIAC 321519EDT

LOTEL W

LED POWER: 10.5W
LED OUTPUT: 1308Lm/3000K
SYSTEM POWER: 12.4W
SYSTEM OUTPUT: 810Lm/3000K
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø86*150mm
HOLE SIZE: /

ANGLE 32°



10.5W 32° 3000K



10.5W 32° 3000K



OPTICS:

RECOMMEND

DIM TRIAC 418912EDT

MIA

MIA was specially designed to extend various range of suspended lamps.
Unique conical shape of the tube provides additional decorative element to the whole design concept.
MIA is recommended to be used in a combination to get the best lighting and decorative effect.
Both trimless and surfaced mounted versions are available.
MIA GROUP, stylish chandelier with 6 suspended lamps, is perfect addition to extend MIA concept.

CE IP20 220-240VAC

S TRIMLESS

S

GROUP

MIA S

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø40*401mm
HOLE SIZE: /

307911A

ANGLE 20°



6W 20° 3000K



6W 20° 3000K



MIA S TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø40*401mm
HOLE SIZE: Ø55mm

309211A



ANGLE 20°



6W 20° 3000K



6W 20° 3000K



MIA GROUP

LED POWER: 6*2.2W
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60H
DIMENSION: Ø40*401*Ø395mm
HOLE SIZE: /

321277A

ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



PALLAS

PALLAS is a new collection of suspended lamps,
presented with three different designs of lamp for choice.
All three versions can be installed with the ceiling installation plate or trimless.
PALLAS W series' concept makes it possible to create unique patterns in the room,
breaking the spaces from the wall to the ceiling, visually enhancing the space.

CCC CE IP20 220-240VAC

FUNNEL

FUNNEL TRIMLESS

PALLAS FUNNEL
PALLAS FUNNEL TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø91.6*68mm
HOLE SIZE: Ø55mm

19°



EGG EGG TRIMLESS

PALLAS EGG
PALLAS EGG TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*78mm
HOLE SIZE: Ø55mm



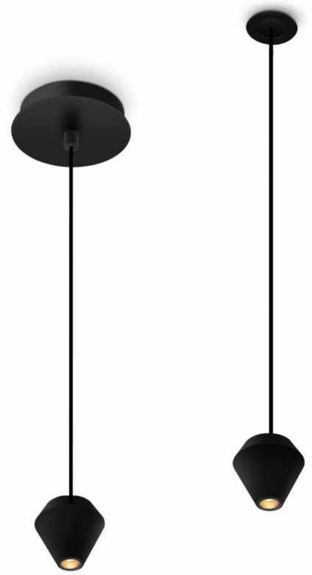

DIAMOND DIAMOND TRIMLESS

PALLAS DIAMOND
PALLAS DIAMOND TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø73*68mm
HOLE SIZE: Ø55mm



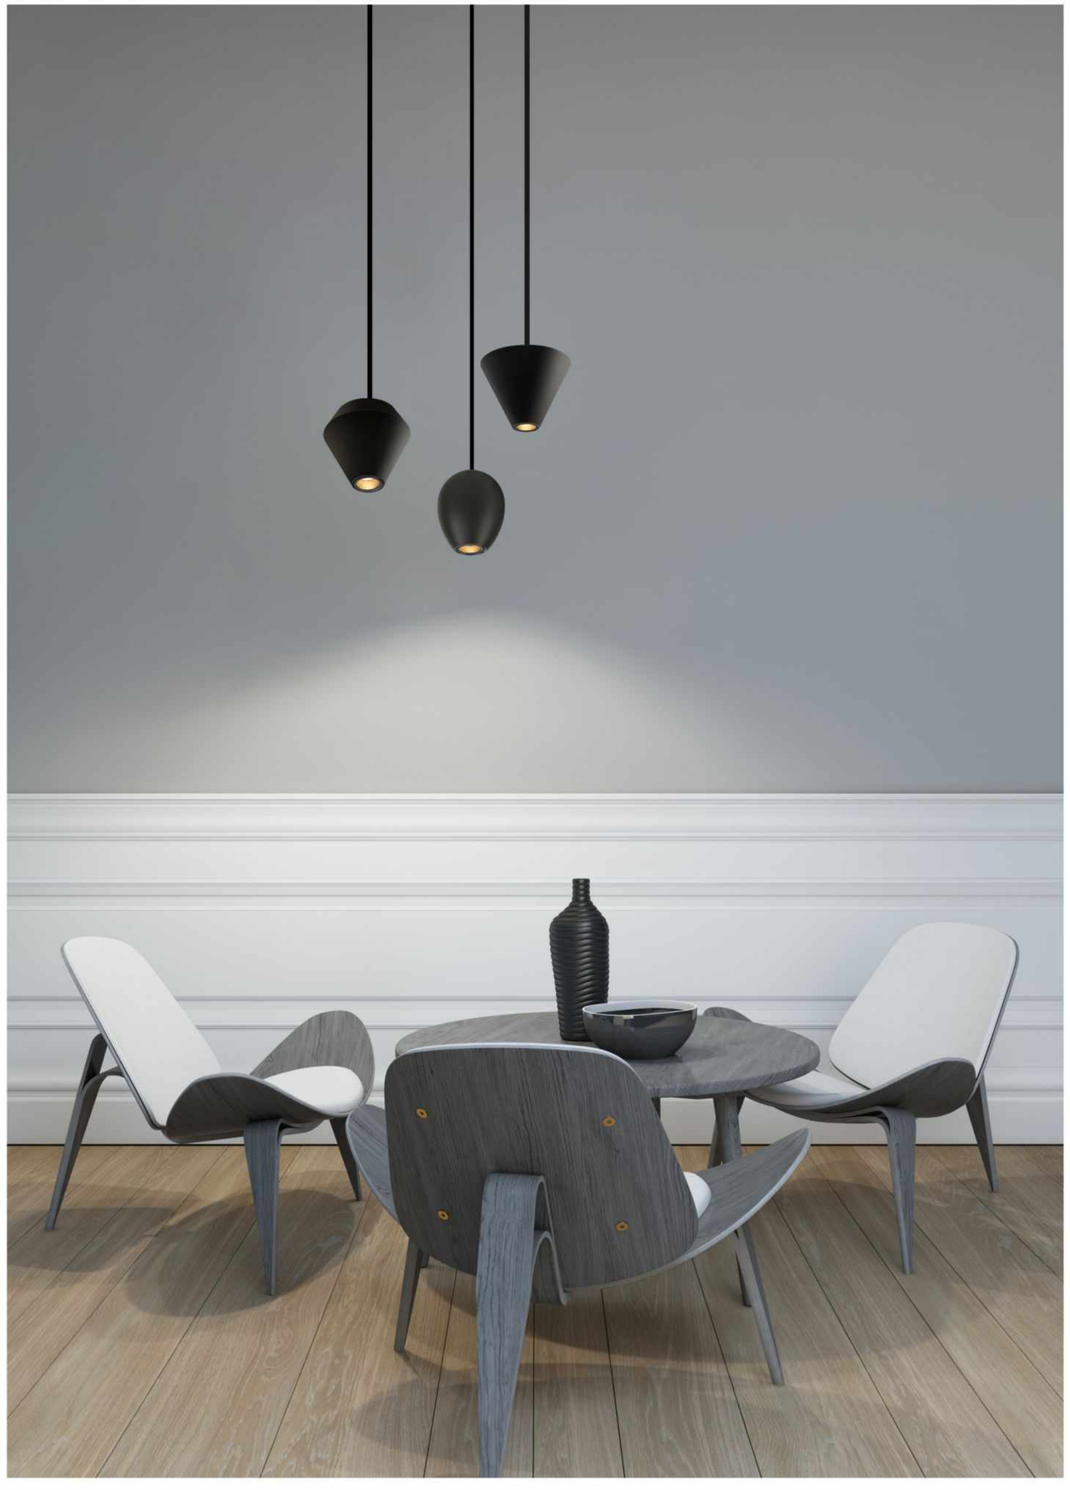

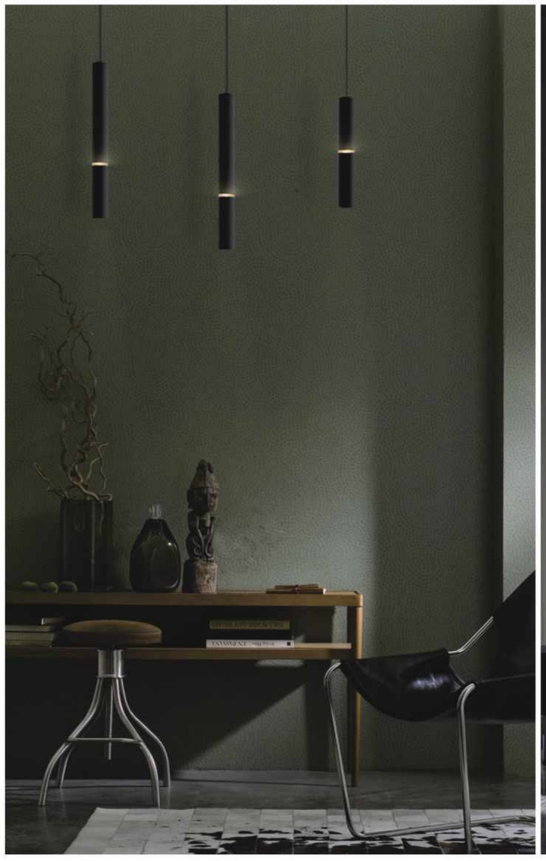

PROMEO

Simple and elegant PROMEO
has already become classic collection of suspended range.
This splendid slim fitting is the best choice for both residential and commercial spaces.
Small lighting ring around the cylinder gives additional
decorative element to the whole design concept.
12° beam angle provides special lighting effect emphasizing separately objects in the room.
3 sizes are available.

IP20 100-240VAC

PROMEO L1 / L2 / L3

LED POWER:2.2W
CRI: 80
SYSTEM POWER:4.2W
OUTPUT: 28Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: Ø32*203mm
Ø32*303mm
Ø32*403mm
HOLE SIZE: /



ANGLE 12°



2.2W 12° 3000K



2.2W 12° 3000K



WAVE H S 30 DN

WAVE H L 30 DN

WAVE

Presents new design for the pendant lights,
WAVE, with 2 options to choose: horizontal and vertical.
Vertical range is possible with downwards focused light providing general ambient light effect and up-light, providing indirect illumination.
Wave vertical collection is available in serval sizes depending on the length and the number of the light sticks.
WAVE with its unique minimalist design is the best choice both for living areas and public zones.

CE IP20 100-240VAC DIM 1-10V

WAVE V S 20 UP

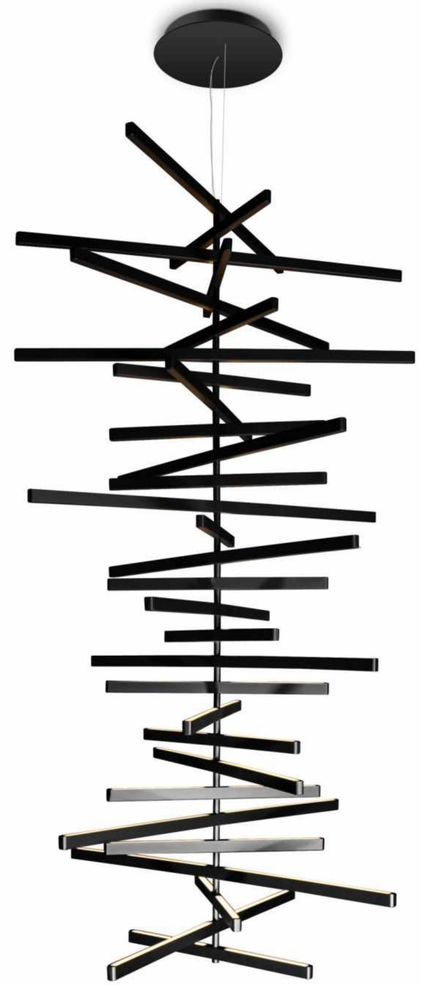

WAVE V LS 30 UP

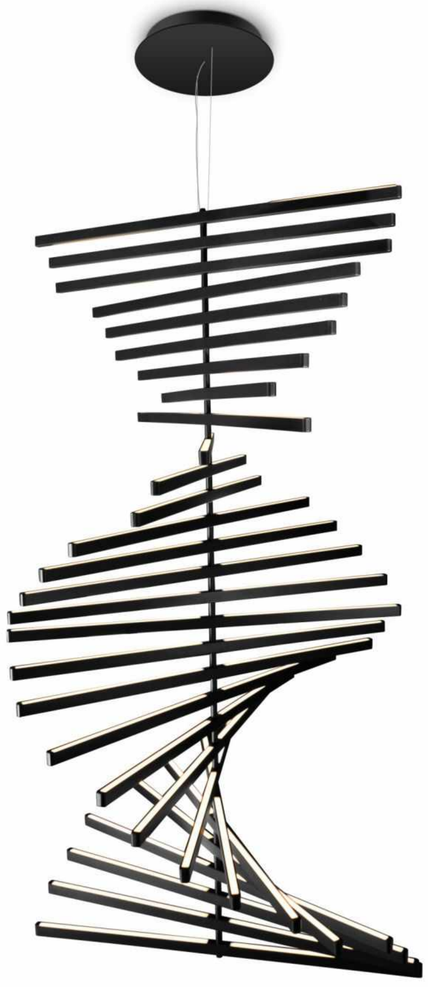

WAVE V L 30 UP

WAVE V S 10 DN / V LS 10 DN / V L 10 DN

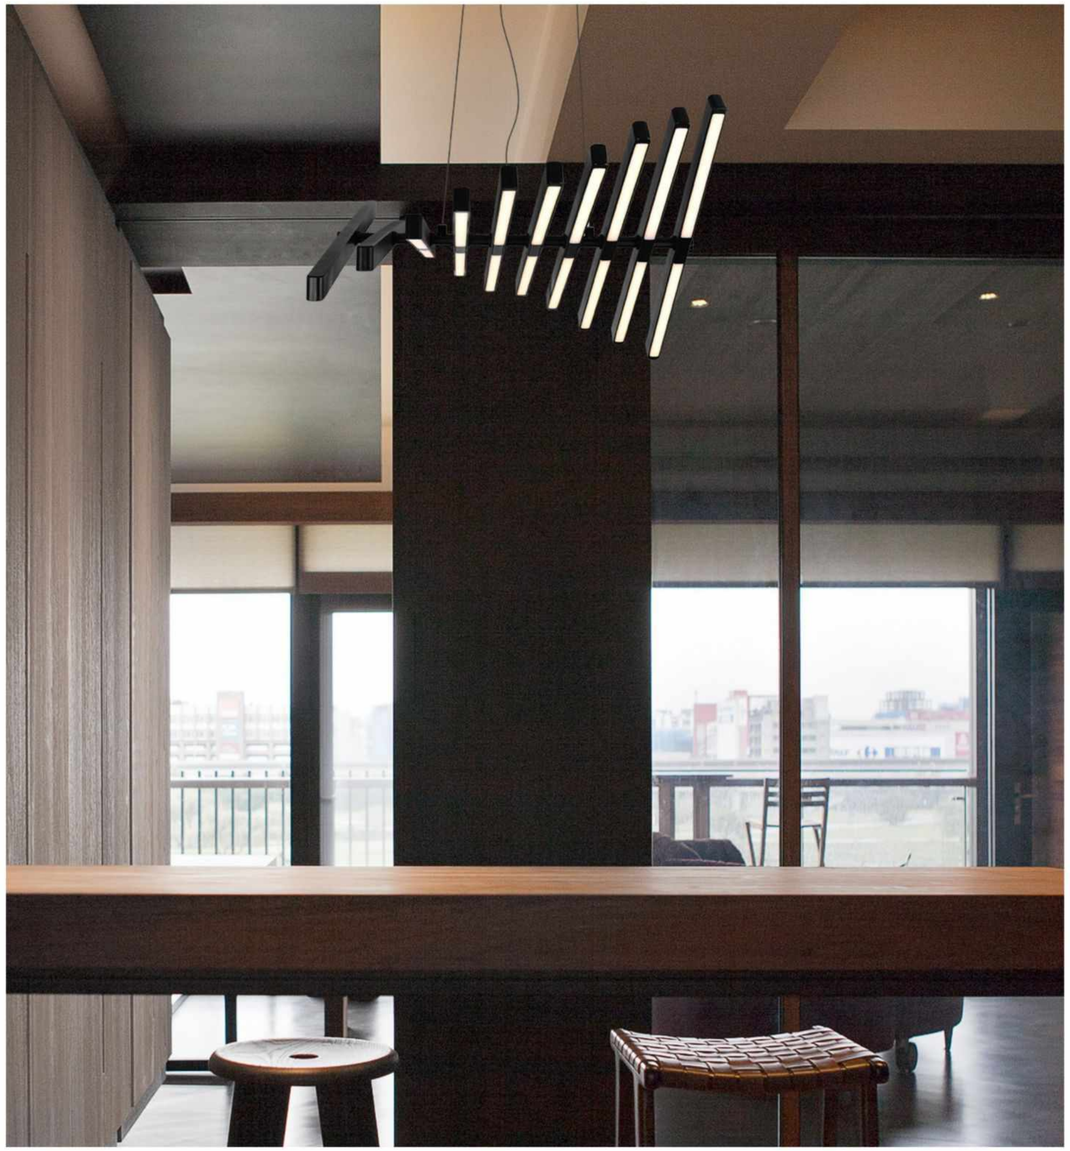

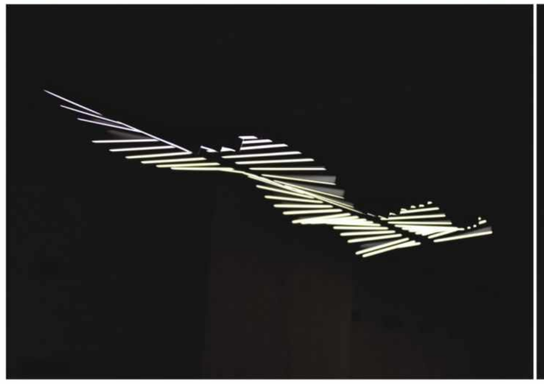

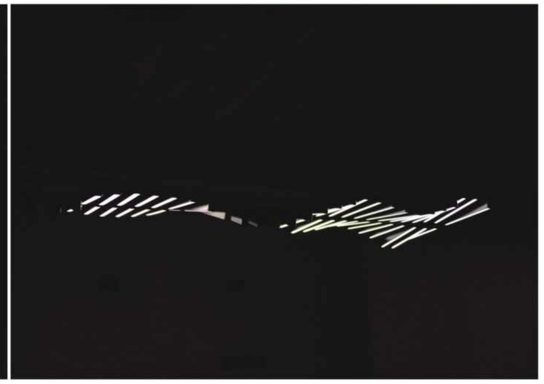

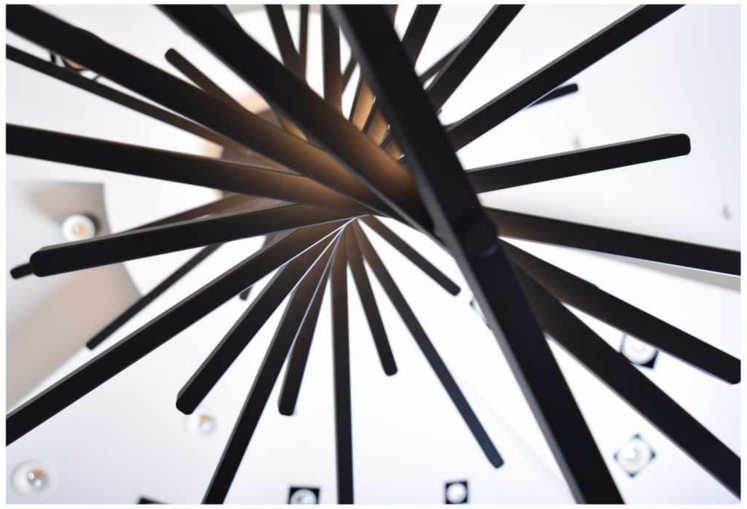

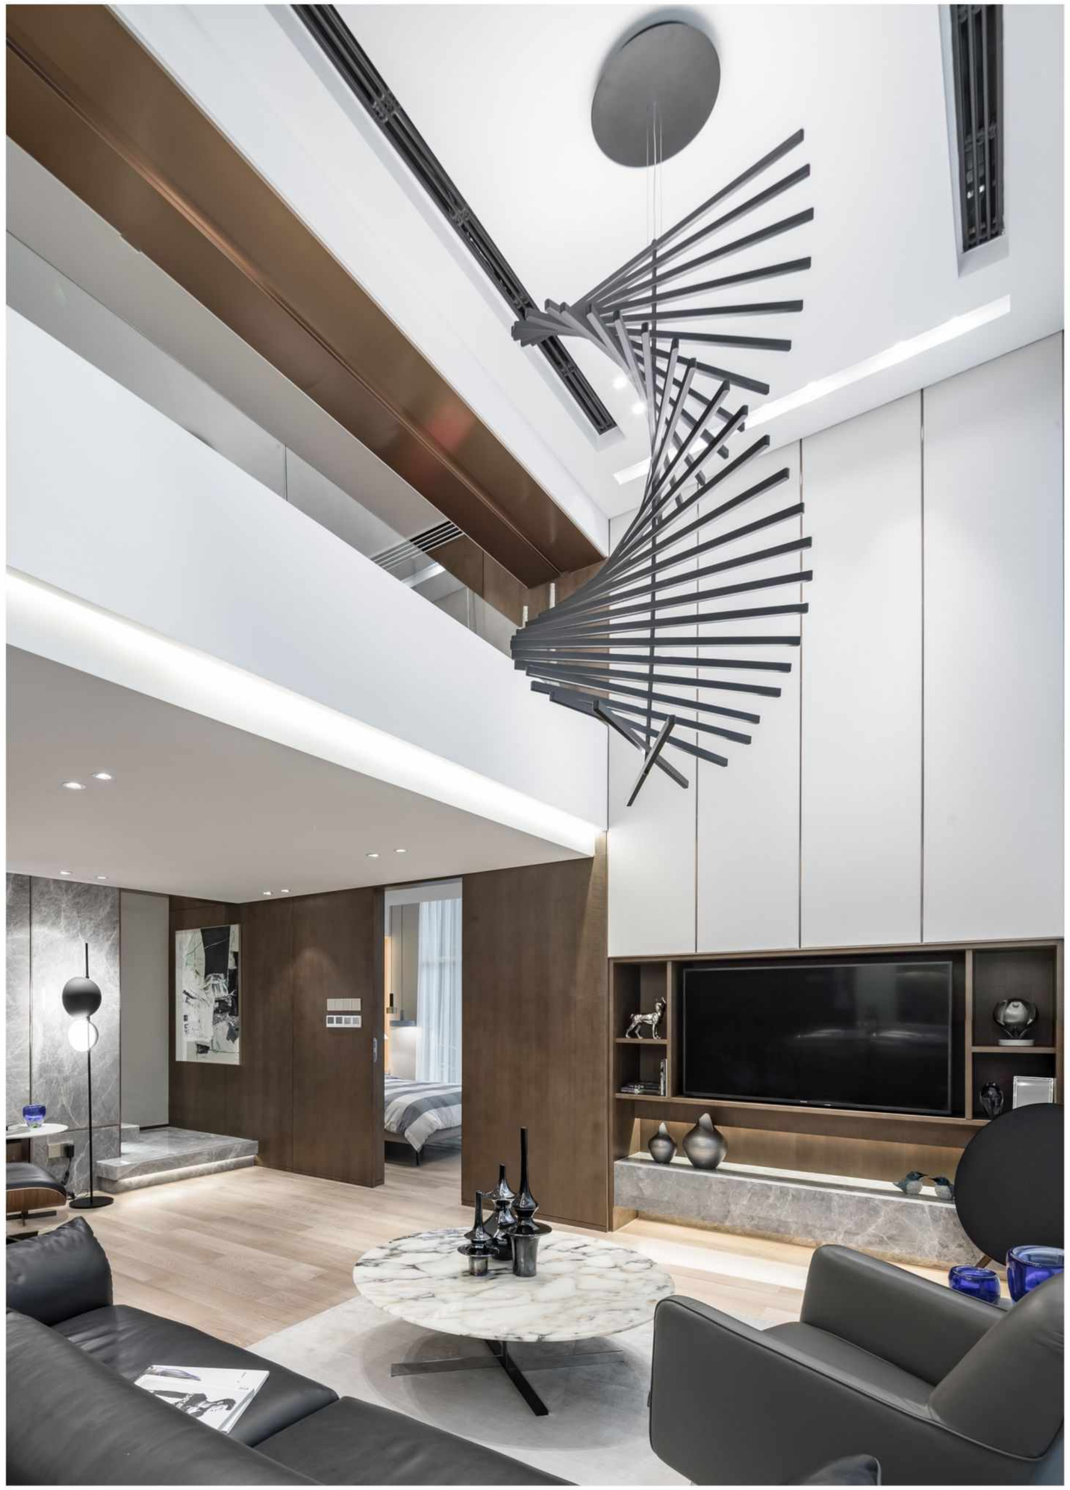

WAVE H L 10 DN

LED POWER: 50W
CRI: 80
SYSTEM POWER: 63W
OUTPUT: 2770Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 468*870*26mm
HOLE SIZE: /mm

L

RECOMMEND

DIM 1-10V
323319DX

323319DX



WAVE H SL 10 DN

LED POWER: 37.5W
CRI: 80
SYSTEM POWER: 43W
OUTPUT: 2062Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 870*468*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323619DX

323619DX



WAVE H L 20 DN

LED POWER: 100W
CRI: 80
SYSTEM POWER: 111W
OUTPUT: 5500Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 933*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323419DX

323419DX



WAVE H SL 20 DN

LED POWER: 75W
CRI: 80
SYSTEM POWER: 83W
OUTPUT: 4150Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 933*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323719DX

323719DX



WAVE H L 30 DN

LED POWER: 150W
CRI: 80
SYSTEM POWER: 163W
OUTPUT: 8250Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323519DX

323519DX



WAVE H SL 30 DN

LED POWER: 112.5W
CRI: 80
SYSTEM POWER: 126W
OUTPUT: 6188Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323819DX

323819DX



WAVE H S 30 DN

LED POWER:74.7W
CRI: 80
SYSTEM POWER:83W
OUTPUT: 4150Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*25*472mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
305819DX



WAVE H S 30 DN ALU

LED POWER:74.7W
CRI: 80
SYSTEM POWER:83W
OUTPUT: 4150Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*25*472mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
304113DX



WAVE V LS 30 UP

LED POWER:112.5W
CRI: 80
SYSTEM POWER:126W
OUTPUT: 6187.5Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 870*1622*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
309819DX



WAVE V S 20 UP

LED POWER:50W
CRI: 80
SYSTEM POWER:56W
OUTPUT: 2770Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 472*1080*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
310319DX



WAVE V S 10 DN

LED POWER:25W
CRI: 80
SYSTEM POWER:29W
OUTPUT: 1380Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 472*525*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
311019DX



WAVE V L 30 UP

LED POWER:150W
CRI: 80
SYSTEM POWER:163W
OUTPUT: 8250Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 870*1622*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
310119DX



WAVE H S 10 DN

WAVE H S 20 DN

WAVE H S 30 DN

WAVE V S 10 UP

WAVE V LS 10 UP

WAVE V L 10 UP

WAVE V S 20 UP

WAVE V LS 20 UP

WAVE V L 20 UP

WAVE V S 30 UP

WAVE V LS 30 UP

WAVE V L 30 UP

WAVE V S 10 DN / V LS 10 DN / V L 10 DN

BEAUTIFICATION

ADRAY SQ SINGLE
192

ADRAY RO SINGLE
192

ADRAY SQ DOUBLE
192

ADRAY SQ DOUBLE
192

ASTRA SINGLE
194

ASTRA DOUBLE
194


AUREOLE
198

BALANCE
200

BEATTY
204

BEL SINGLE
208

BEL DOUBLE
208

BEND H 150
212

BEND H 300
213

BEND H 600
216

BOW
217

BOWLING
90

COLA IN
222

COLA ON
222

CUBO R
226

CUBO L
226

CURES LONG
229

CURES ROUND
229

DREAM
234

ELF
235

FISHING W
238

FLOD O ROUND
242

FLOD O SQUARED
242

FLOD I ROUND
242

FLOD I SQUARED
242


GEMO ROUND
245

GEMO SQUARED
245

HEMLINE
249

KARINA RS
252

KARINA RM
253

KARINA RHOMBUS
253

KARINA ST
254

KARINA SO
254

KUBIK WALL
258

LIGHTBAR ONE
260

LIGHTBAR TWIST
260

LIRA W
264

LIRA W2 R
265

LIRA W2 L
265

LIRA W3 R
266

LIRA W3 L
266

LOTEL W
156

LUXURY SINGLE
274

LUXURY DOUBLE
274

MIRO 300
279

MIRO 550
280

MOON
284

SET
286

SHELL ROUND
288

SHELL SQUARE
288

SINE S
290

SINE S DOUBLE
290


SONG C
292


SONG D
292


SONG E
292

TV
296

WALL LINE 2.0
S 280
298

WALL LINE 2.0
S 530
298

WALL LINE 2.0
S 1030
298

WALL LINE 2.0
S 2030
298

WALL LINE 2.0
S3030
298

WALL LINE 2.0
D 280
299

WALL LINE 2.0
D 530
299

WALL LINE 2.0
D 1030
299

WALL LINE 2.0
D 2030
299

WALL LINE 2.0
D 3030
299

WING
302

PERFORM YOUR LIGHT

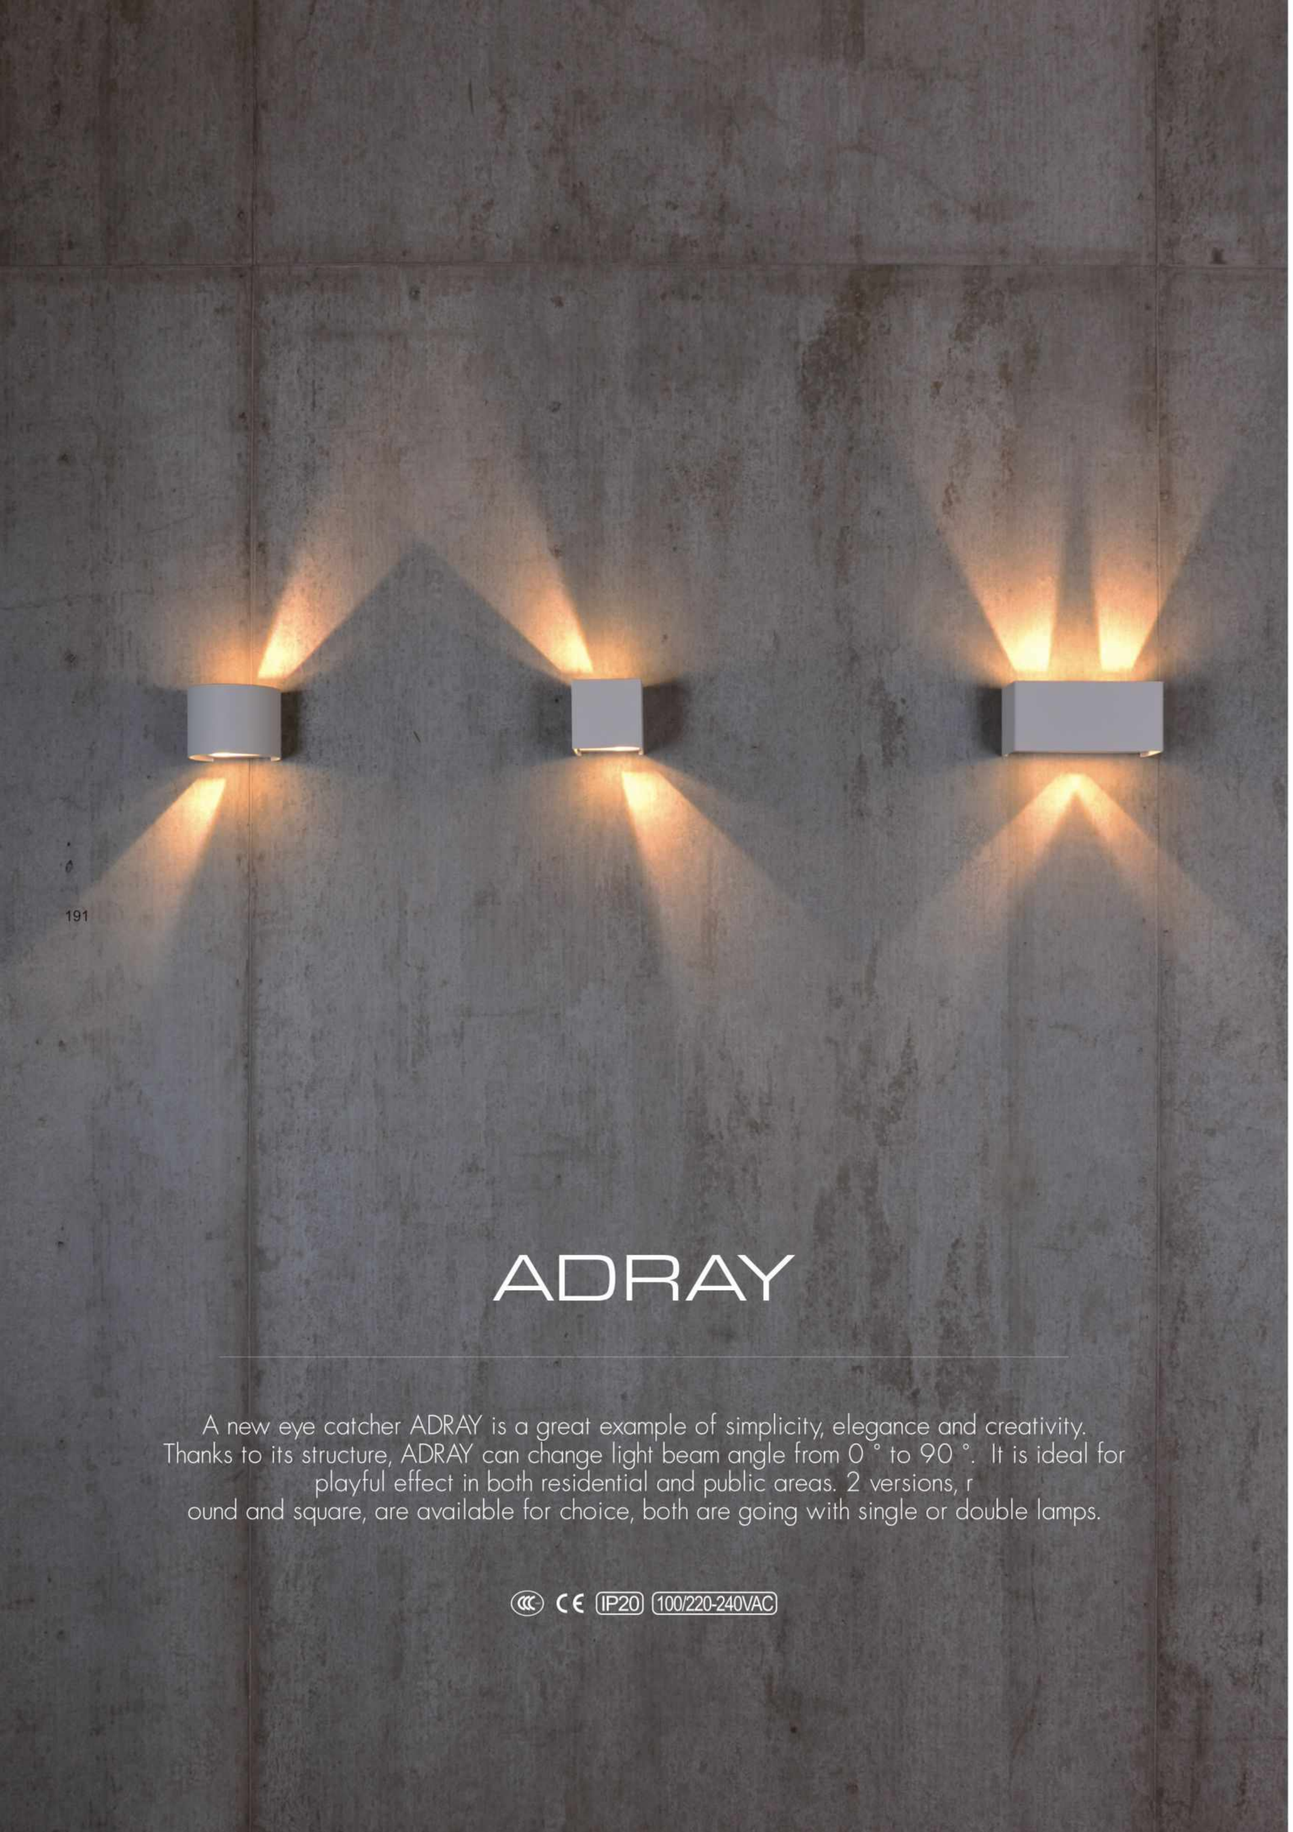

ADRAY

A new eye catcher ADRAY is a great example of simplicity, elegance and creativity. Thanks to its structure, ADRAY can change light beam angle from 0 ° to 90 °. It is ideal for playful effect in both residential and public areas. 2 versions, r ound and square, are available for choice, both are going with single or double lamps.

IP20 100/220-240VAC

SQ SINGLE

SQ DOUBLE

RO SINGLE

RO DOUBLE

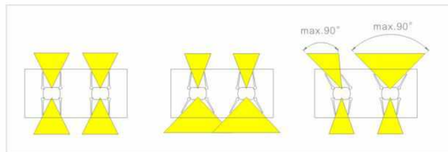

ADRAY SQ SINGLE / RO SINGLE

LED POWER: 6.8W
CRI: 80
SYSTEM POWER: 7.7W
OUTPUT: 379Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 90*90*90mm
Ø120*90mm
HOLE SIZE: /

A

418319A



418419A

ADRAY SQ DOUBLE / RO DOUBLE

LED POWER: 13.6W
CRI: 80
SYSTEM POWER: 14.3W
OUTPUT: 1016Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 190*90*90mm
273.6*90*90mm
HOLE SIZE: /

A

418519A



418619A



COLOR FINISHINGS:

PAB PAW

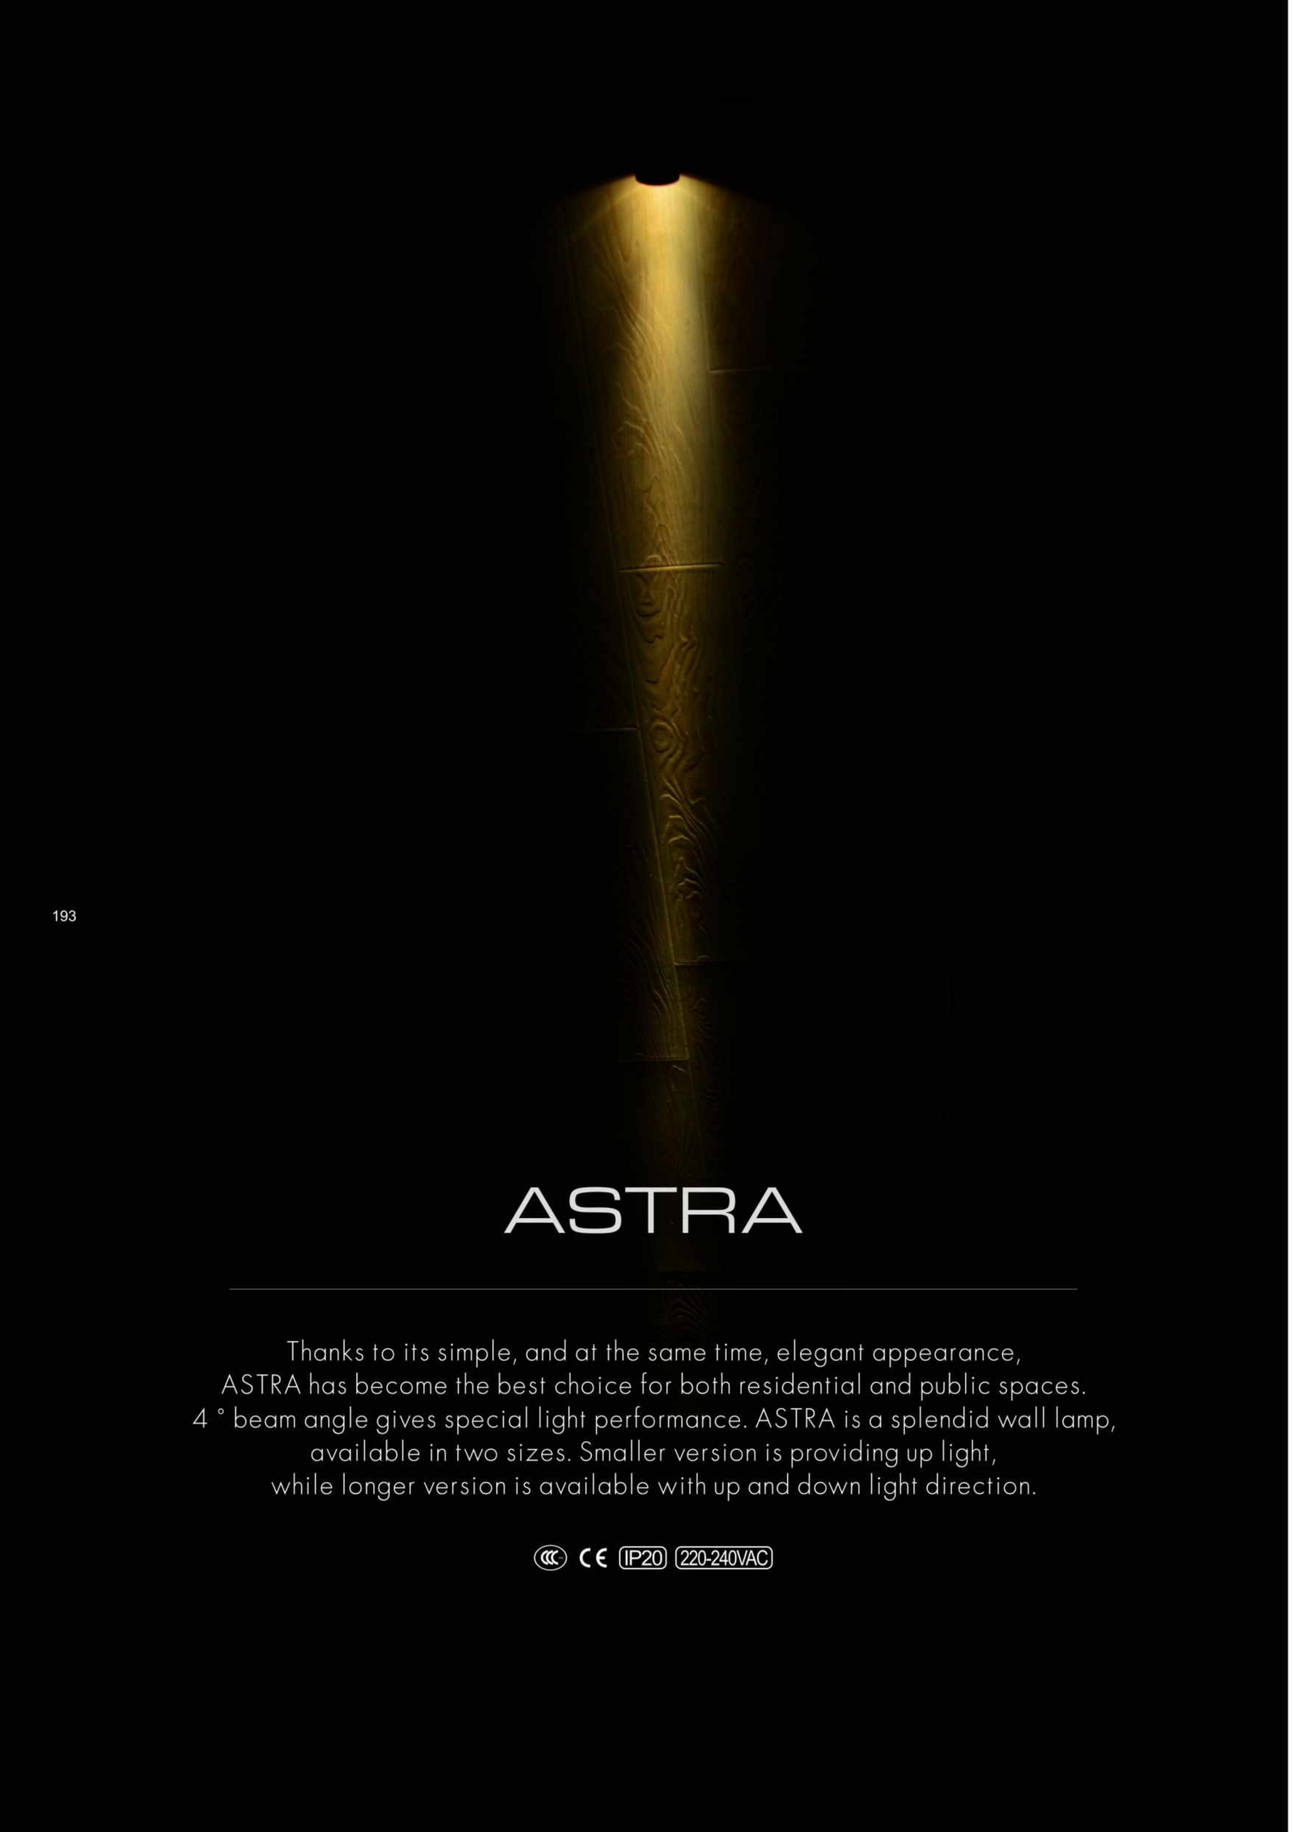

ASTRA

Thanks to its simple, and at the same time, elegant appearance,
ASTRA has become the best choice for both residential and public spaces.
4 ° beam angle gives special light performance. ASTRA is a splendid wall lamp,
available in two sizes. Smaller version is providing up light,
while longer version is available with up and down light direction.

IP20 220-240VAC

SINGLE

DOUBLE

ASTRA SINGLE

426317A

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 164Lm
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø49*75*57mm
HOLE SIZE: /

ASTRA DOUBLE

426427A

LED POWER: 4.4W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 5W
SYSTEM OUTPUT: 328Lm
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø49*150*57mm
HOLE SIZE: /

ANGLE 4°



2.2W 4° 3000K

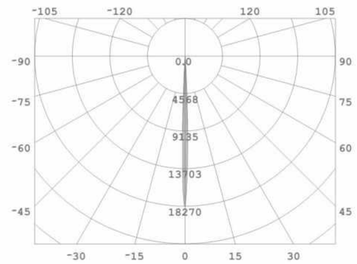

2.2W 4° 3000K



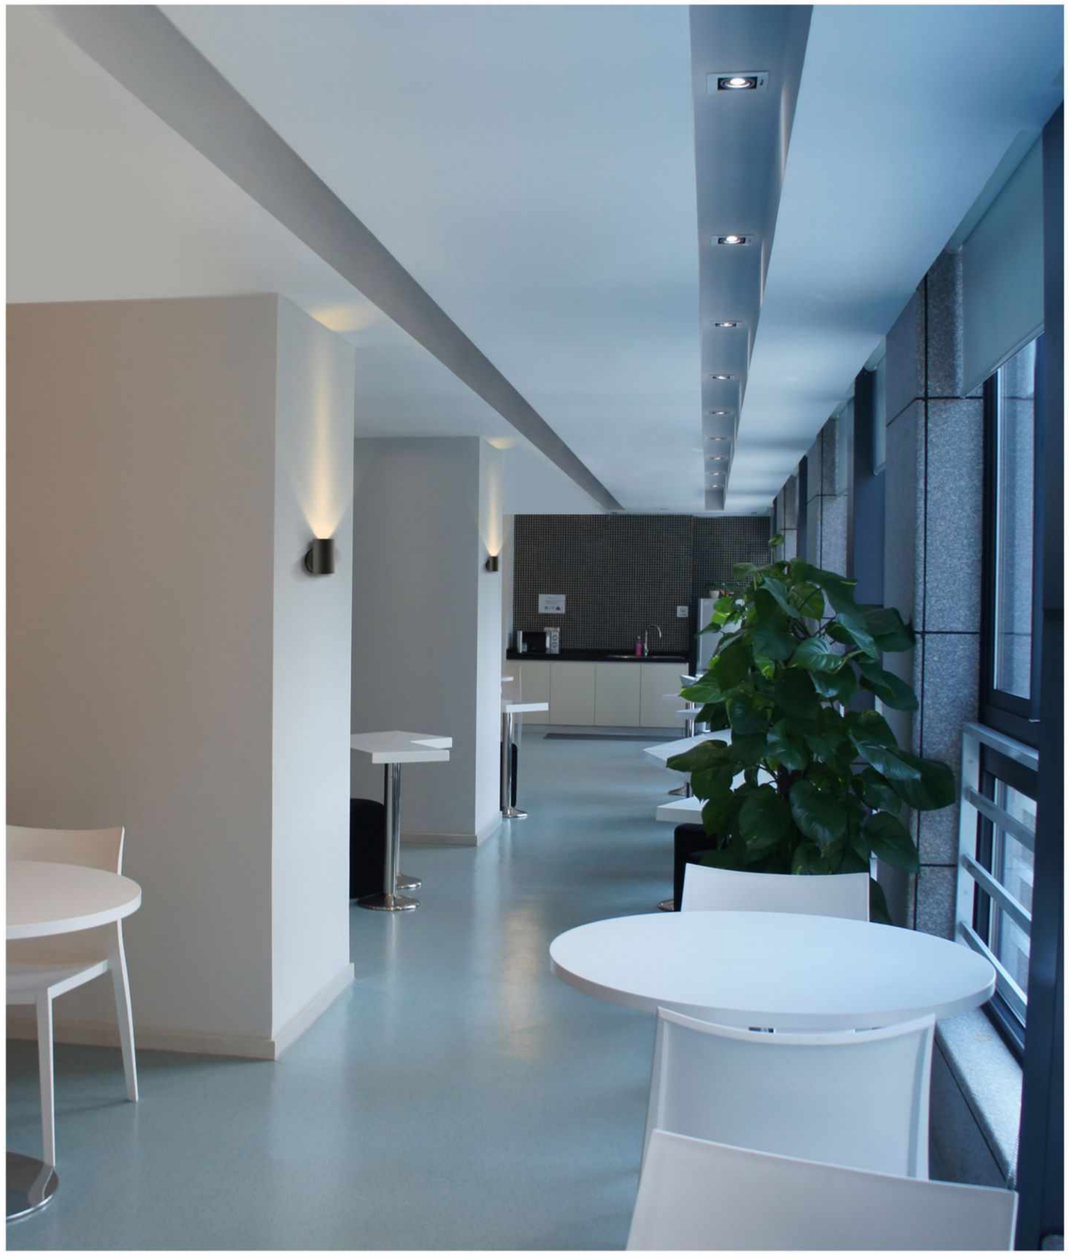

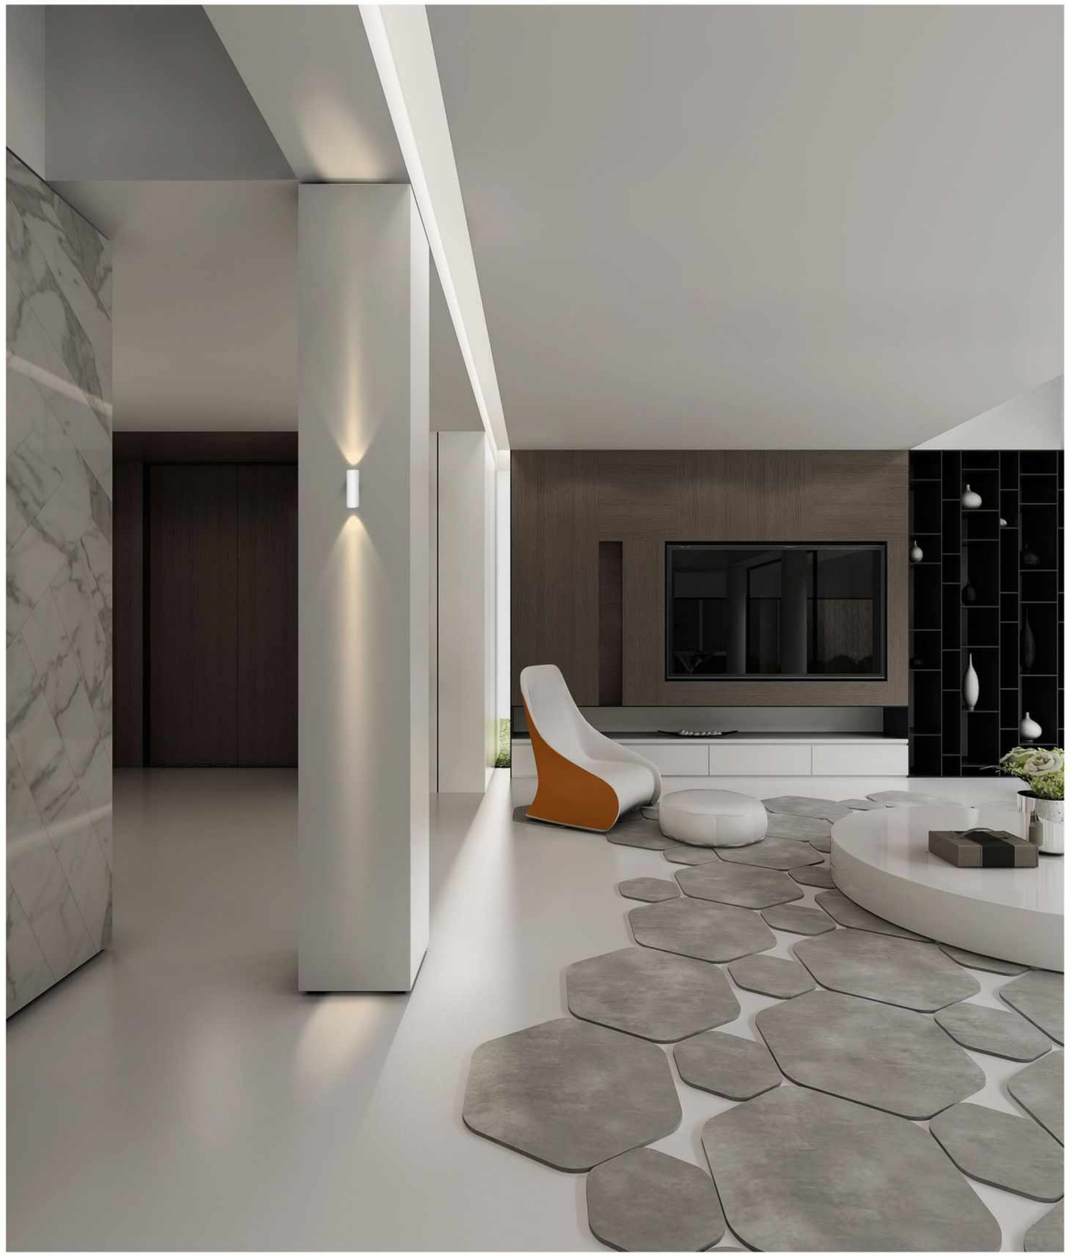

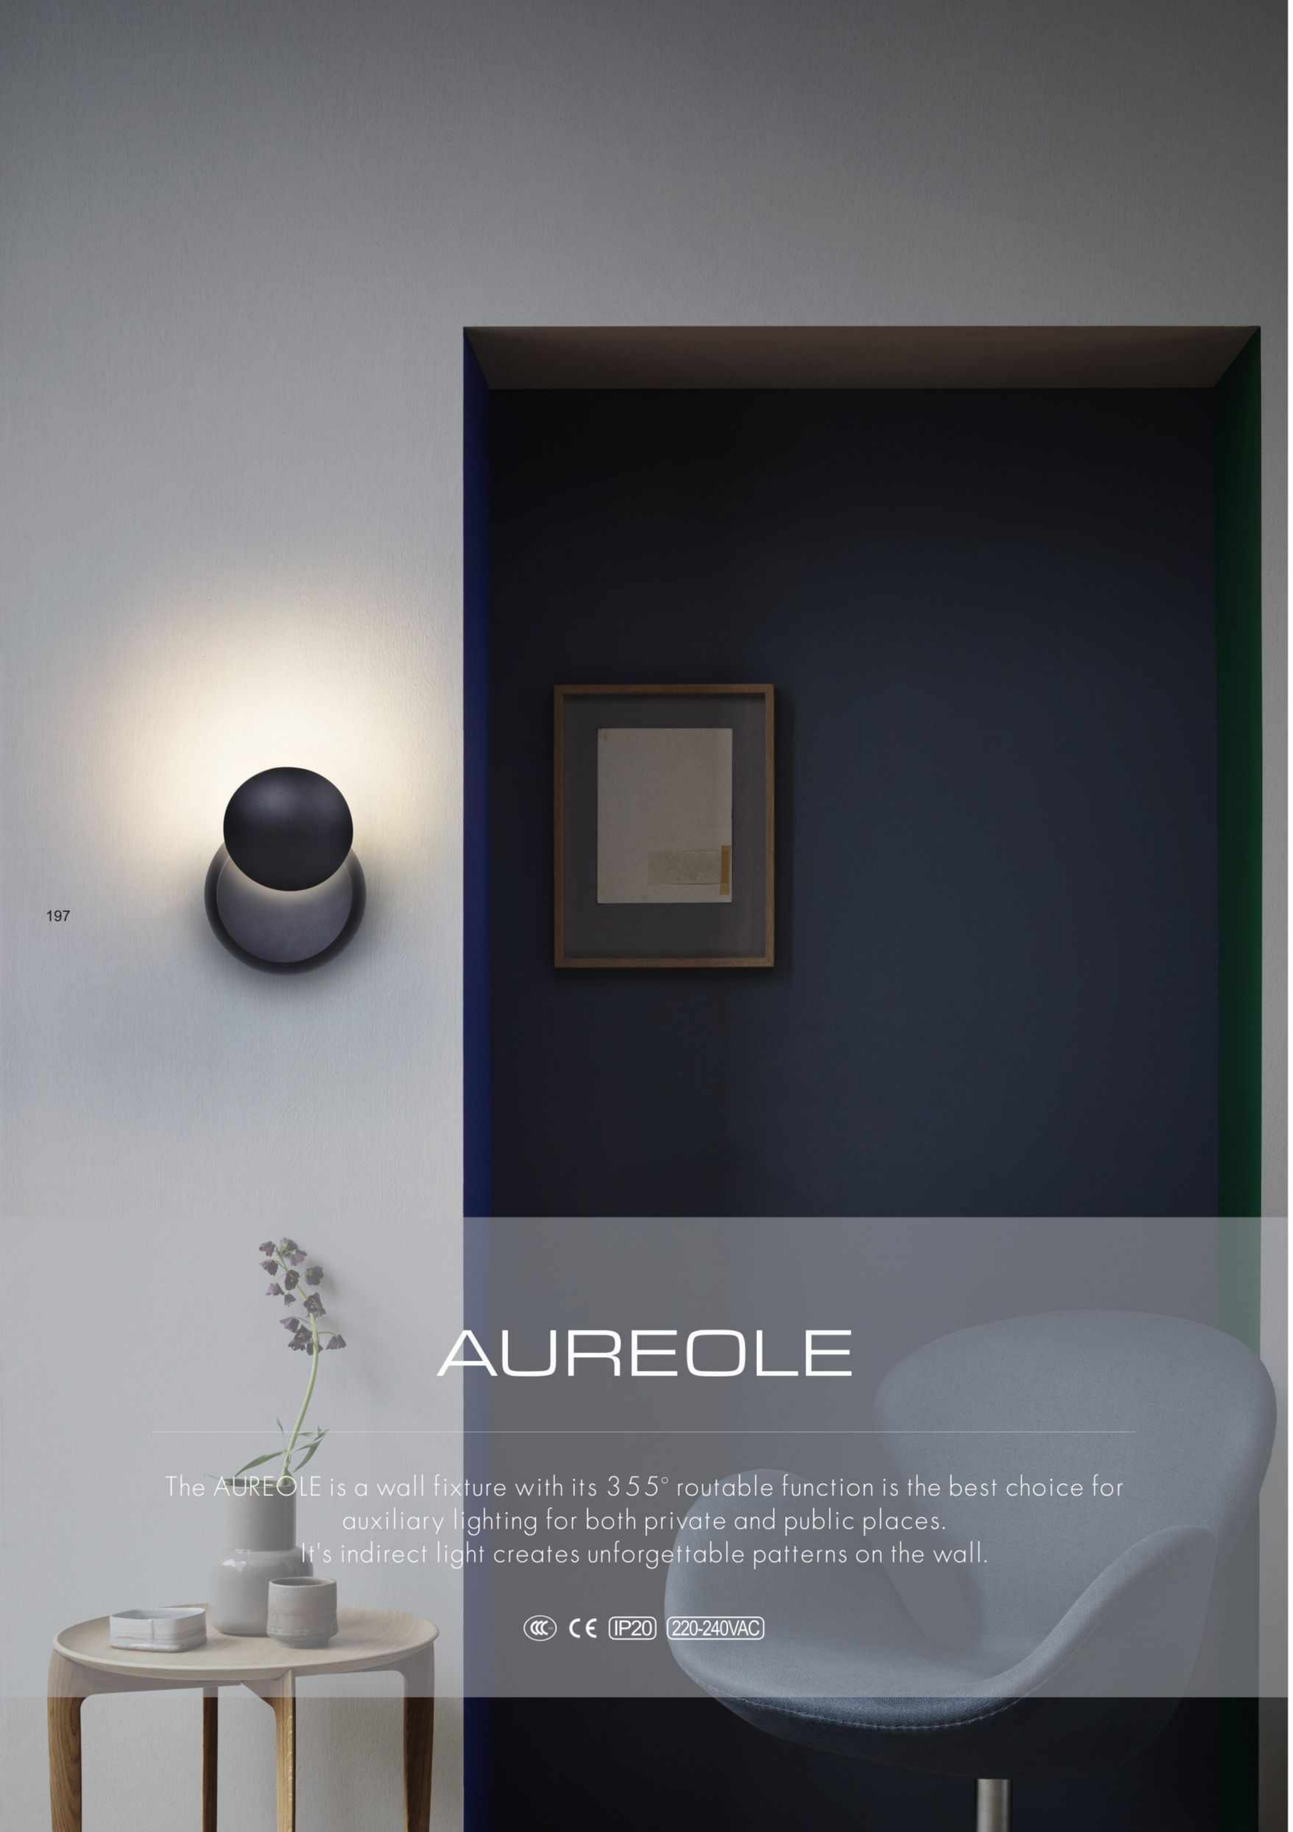

AUREOLE

The AUREOLE is a wall fixture with its 355° routable function is the best choice for auxiliary lighting for both private and public places.
It's indirect light creates unforgettable patterns on the wall.

CE IP20 220-240VAC

AUREOLE

LED POWER:6.5W
CRI: 90
SYSTEM POWER:6.5W
OUTPUT: 216Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø178*47.5mm
HOLE SIZE: /

L

431619A



COLOR FINISHINGS:

PAB PAW

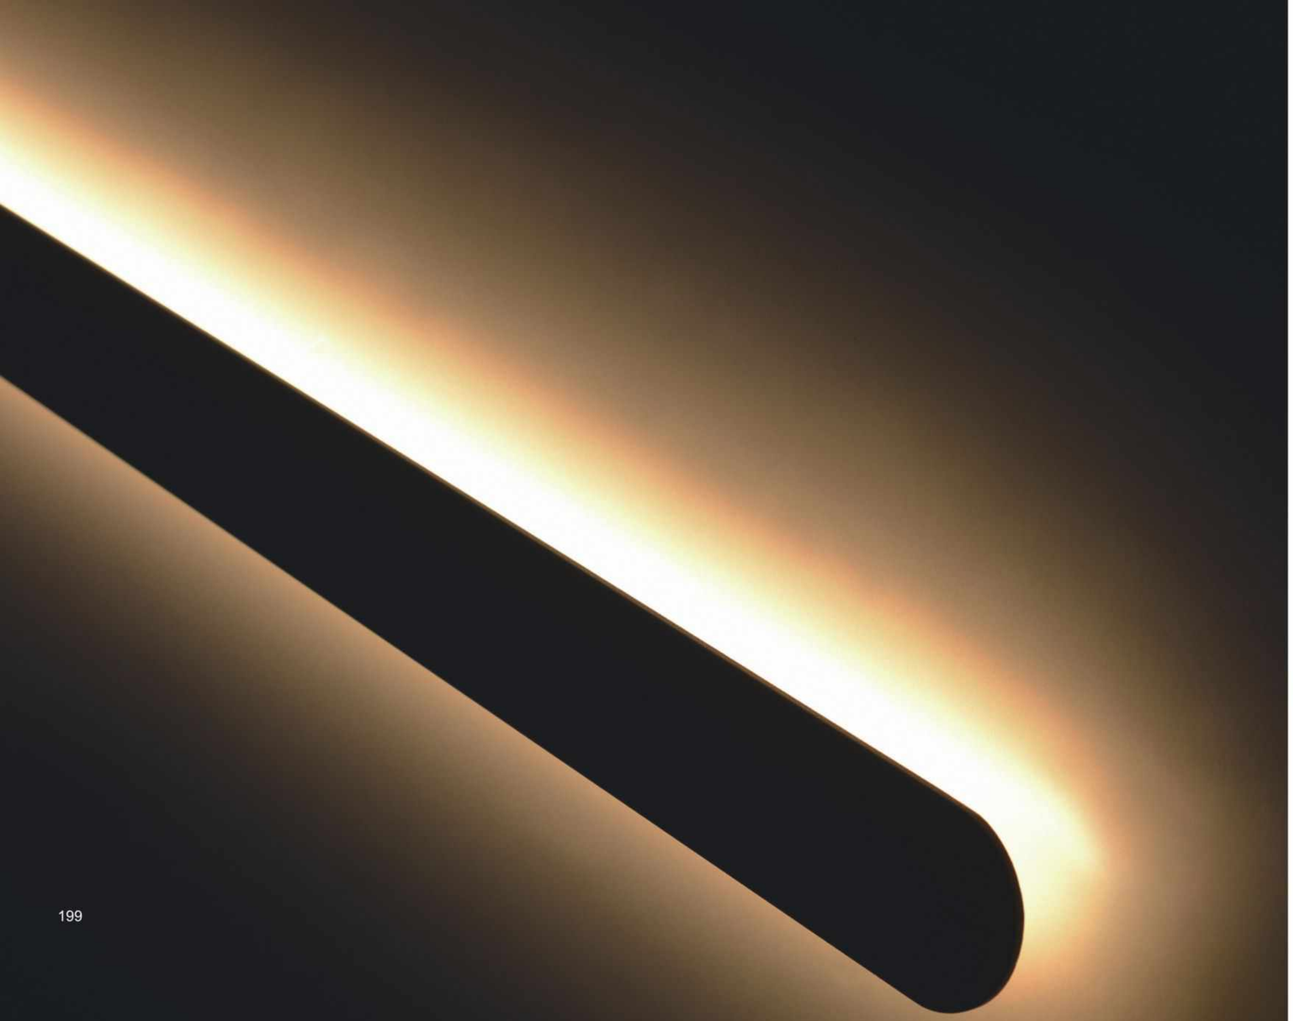

BALANCE

With its slim and long shape, with soft light emitting — BALANCE is a great solution for living rooms, restaurants, lobby zones etc.
Combination of several pieces will create unique patterns suitable for any modern and creative space.

CE IP20 220-240VAC

BALANCE

BALANCE

LED POWER: 32.4W
CRI: 90
SYSTEM POWER: 36W
OUTPUT:1843 Lm/3000K
INPUT: 220-240VAC
DIMENSION: 1800*52.5*45mm
HOLE SIZE: /

L

433414A



COLOR FINISHINGS:

PAB PAW

BALANCE

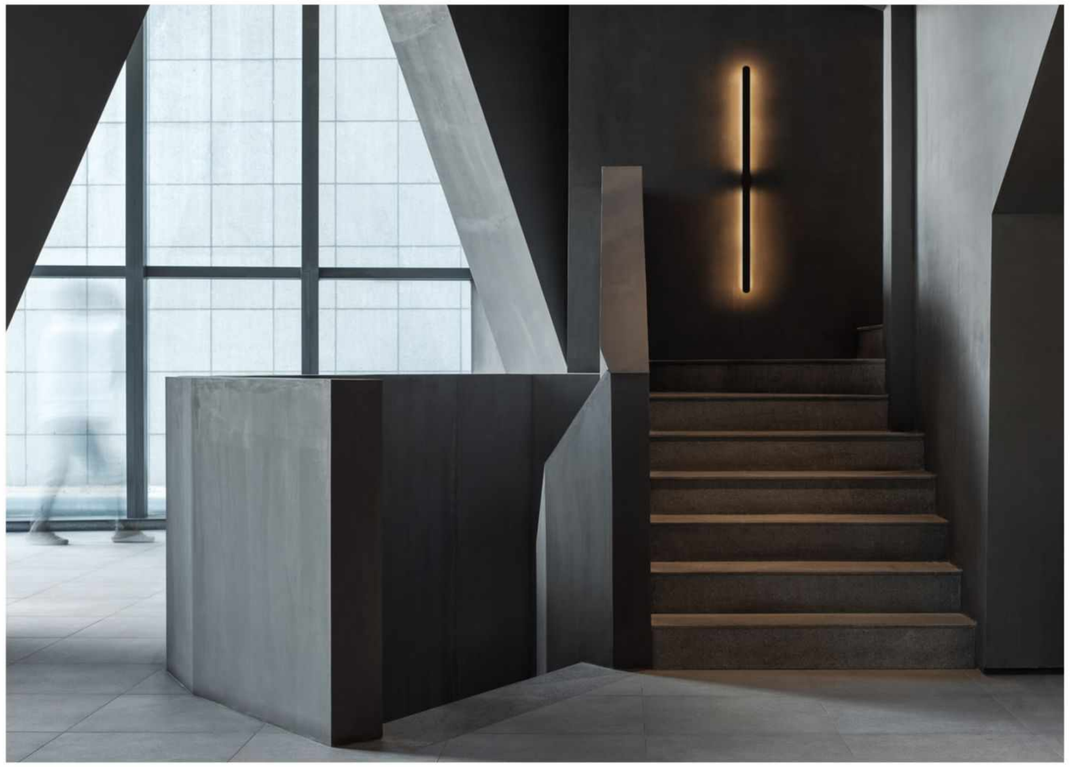

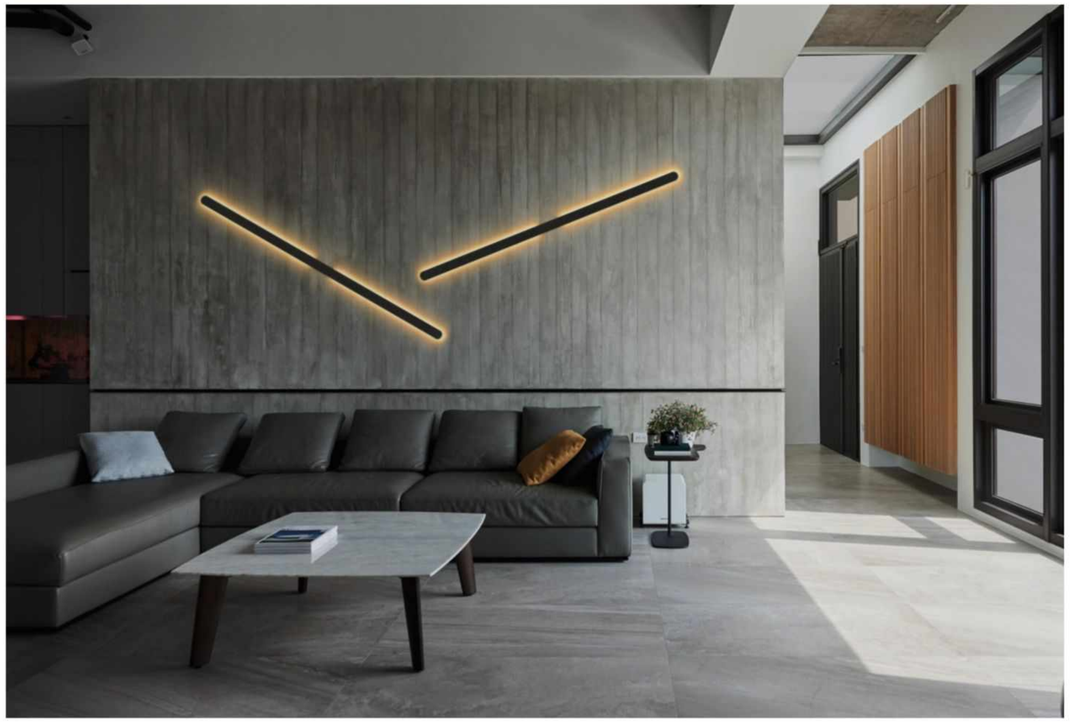

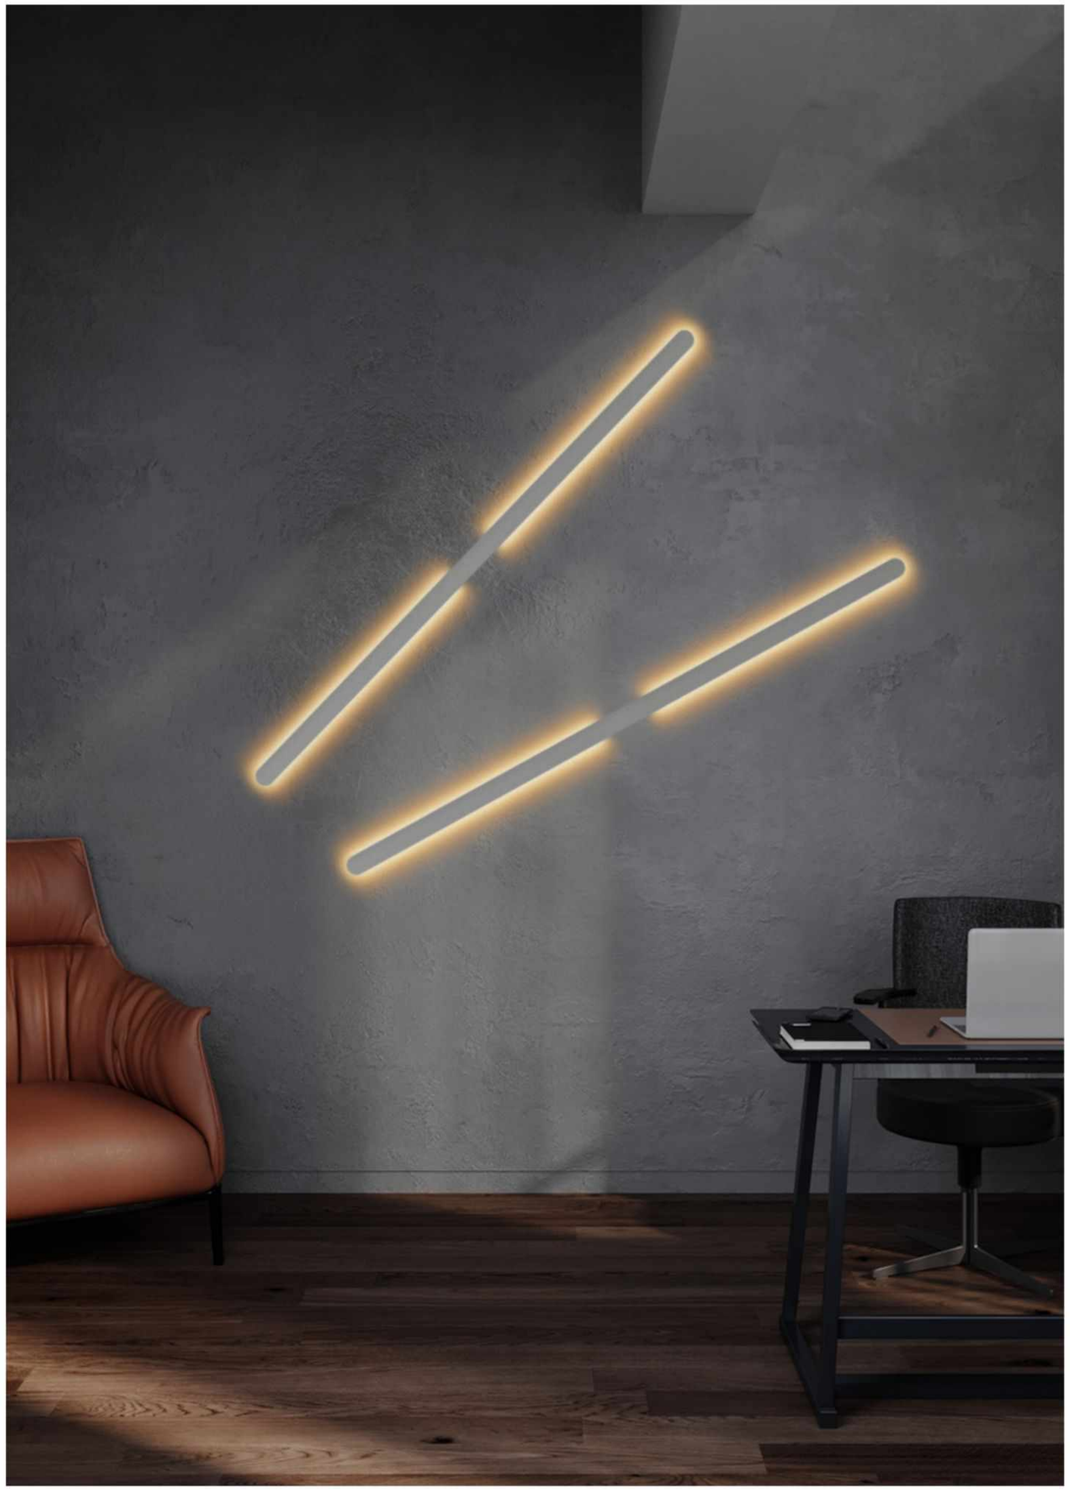

BEATTY

Playing with light and shadow on the wall, BEATTY performs unforgettable lighting effect.
The elegant semi sphere design alongside with beautiful light performance making
BEATTY more and more popular among designers and architectures.

BEATTY is a wall mounted downlight that
could be used both for indoor and outdoor application,
thanks to its IP 65.

CE IP65 220-240VAC

BEATTY

LED POWER: 8.3W
CRI: 80
SYSTEM POWER: 10W
OUTPUT: 552Lm/2700K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 174*149*62mm
HOLE SIZE: /

L

423314A



COLOR FINISHINGS:

PAB PAW

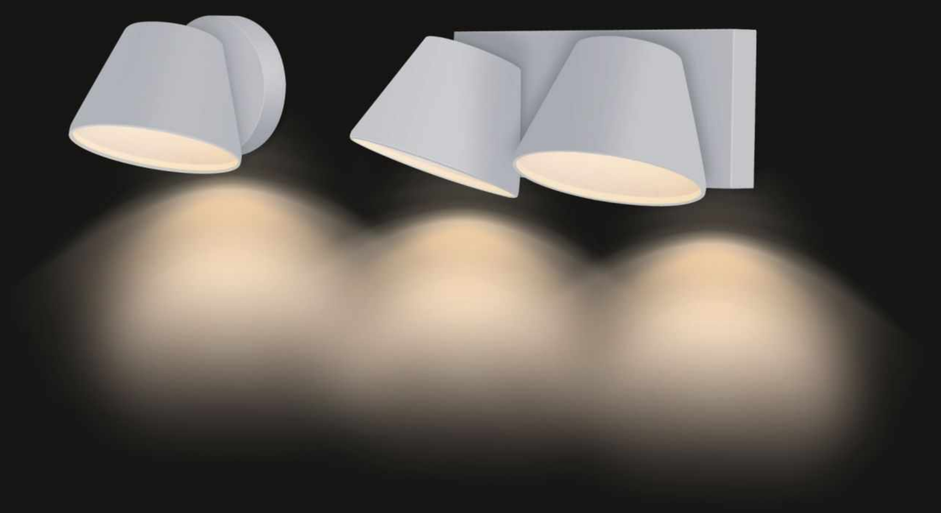

BEL

This splendid wall lamp is the best choice for bed side lighting.
Classic bell-shaped lamp creates vintage atmosphere in a bed room.
Thanks to its ratable 350° function, BEL can be easily adjusted however need.
BEL is available in 2 versions: single and double. DIM function is included.

IP20 220-240VAC DIM TRIAC

SINGLE



DOUBLE

COLOR FINISHINGS:

PAW

PAB

BEL SINGLE

LED POWER:5W/AC Module
CRI: 80
SYSTEM POWER:5W
OUTPUT: 138Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 80*74.6*93mm
HOLE SIZE: /

421314DT

L

RECOMMEND

DIM TRIAC
421314DT

BEL DOUBLE

LED POWER:10W/AC Module
CRI: 80
SYSTEM POWER:10W
OUTPUT: 276Lm/3000K
INPUT: 220V-240VAC,50/60Hz
DIMENSION: 170*93*67mm
HOLE SIZE: /

421424DT

L

RECOMMEND

DIM TRIAC
421424DT

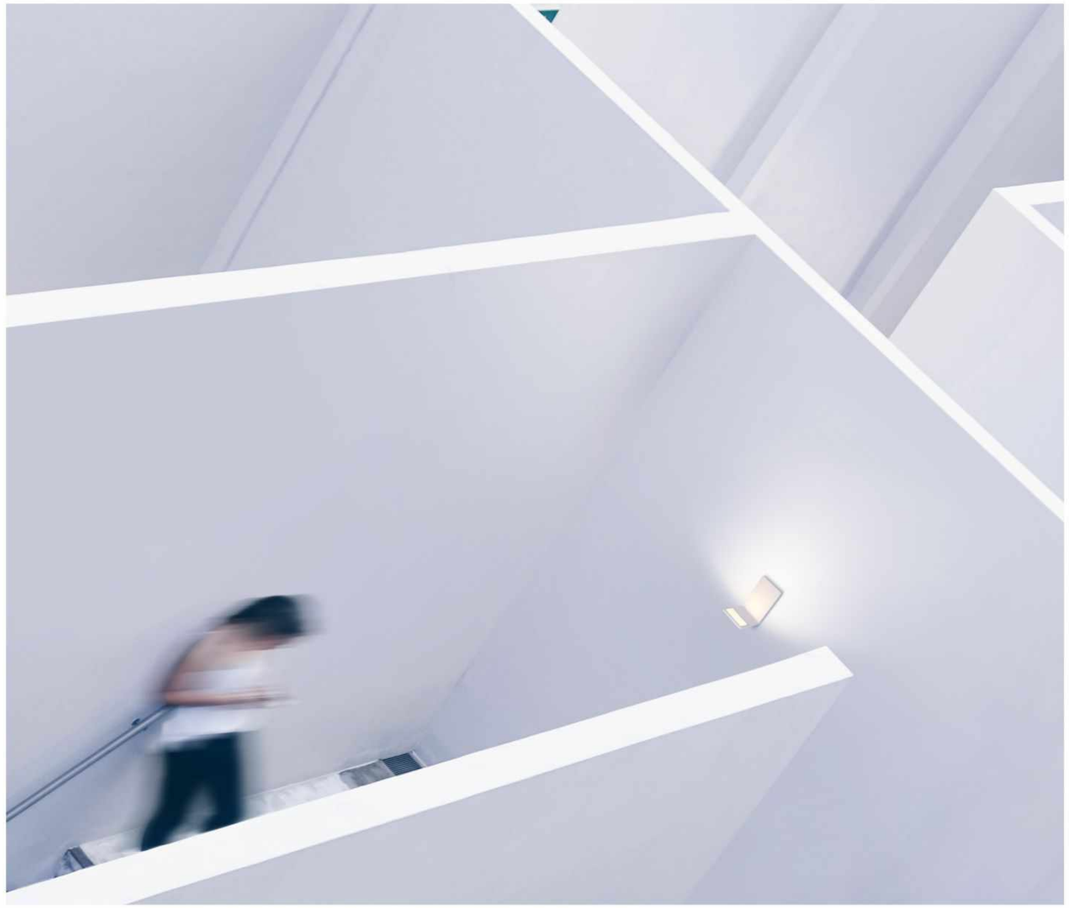

H 150

BEND

Sharp lines of BEND are specially created to impress by its sophisticated, dynamic design. Perfect combination of simplicity and contemporary look can easily brighten up your days.

The plexiglass top cover hides a series of power LEDs, delivering a diffuse harmonious light.

IP20 220-240VAC

428814A

BEND H 150

LED POWER:3.2W
CRI: 90
SYSTEM POWER:4.1W
OUTPUT:225Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 150*180*112mm
HOLE SIZE: /



L

H 300

BEND H 300

426014A

LED POWER:5.2W
CRI: 90
SYSTEM POWER:6.8W
OUTPUT:428Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 300*120*112mm
HOLE SIZE: /



L

H 600

BEND H 600

LED POWER:10.5W
CRI: 90
SYSTEM POWER:12.7W
OUTPUT: 828Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 600*112*120mm
HOLE SIZE: /

L



BOW

Small elegant tubular shapes BOW has already
become classic range of wall mounted collection of.
This splendid fitting consists of two cylinders: one is fixed on the wall while the other can be adjusted.
Both single use or installed in group BOW creates perfect light effect on the wall.
Thanks to variety of color combinations,
BOW can match any design of the room. Recommended
both for residential and public spaces.

CE IP20 100-240VAC

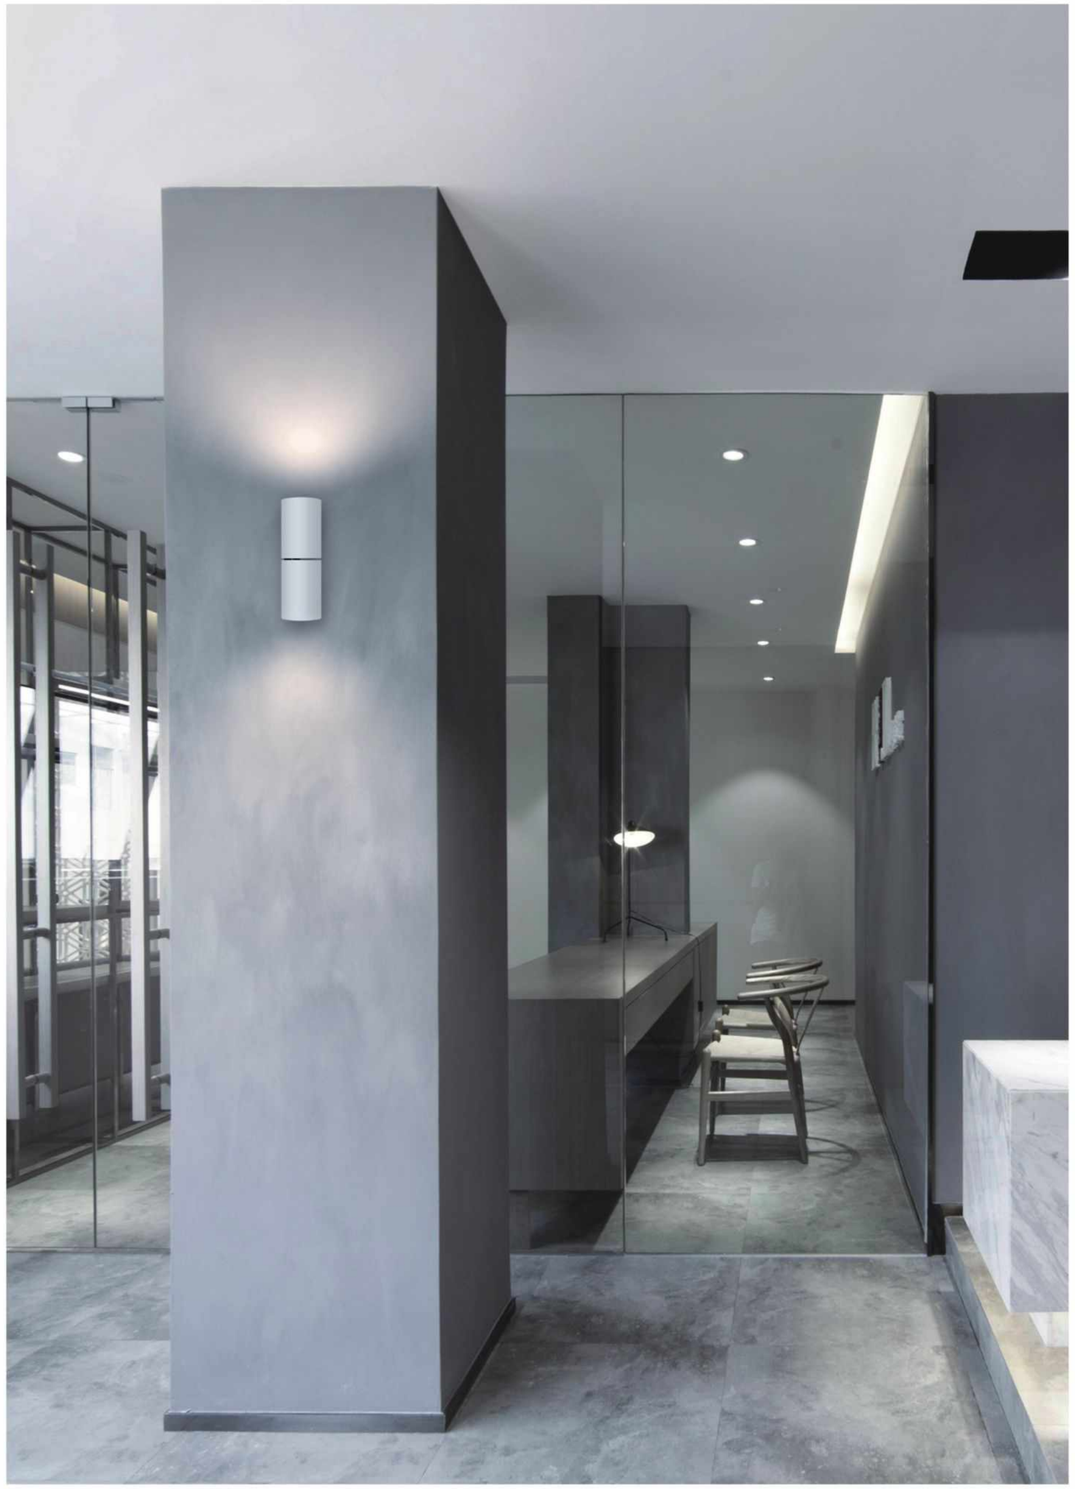

COLOR FINISHINGS:

PAW

PAB

PAW - WSG

PAB - WGL

BOW

LED POWER: 2*3.66W
LED OUTPUT: 445Lm/3000K
SYSTEM POWER: 8.6W
SYSTEM OUTPUT: 762Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø80*234mm
HOLE SIZE: /

425019EA



3.6W 40° 3000K



3.6W 40° 3000K



3.6W 40° 3000K



OPTICS:

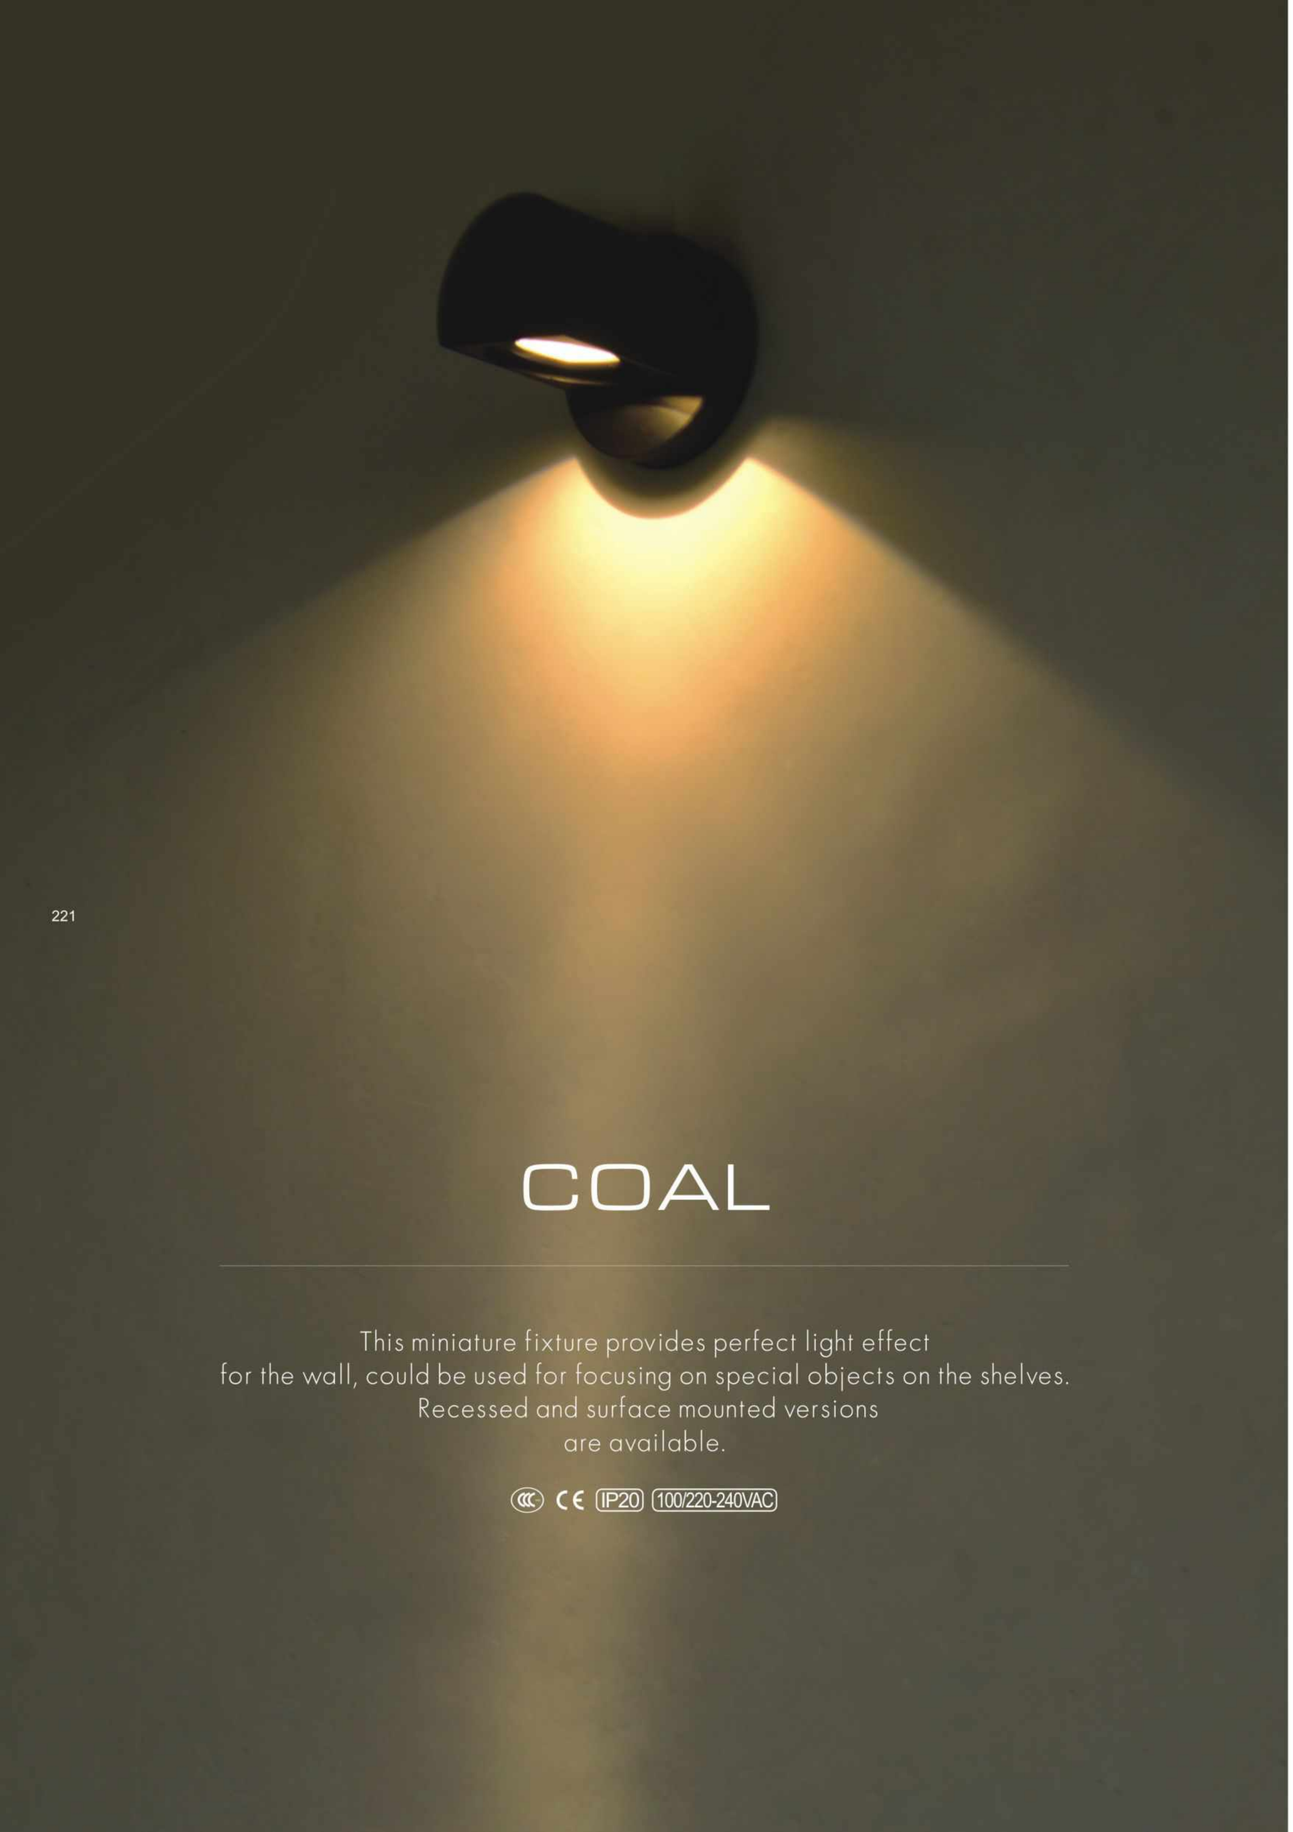

COAL

This miniature fixture provides perfect light effect
for the wall, could be used for focusing on special objects on the shelves.
Recessed and surface mounted versions
are available.

IP20 100/220-240VAC

IN

ON

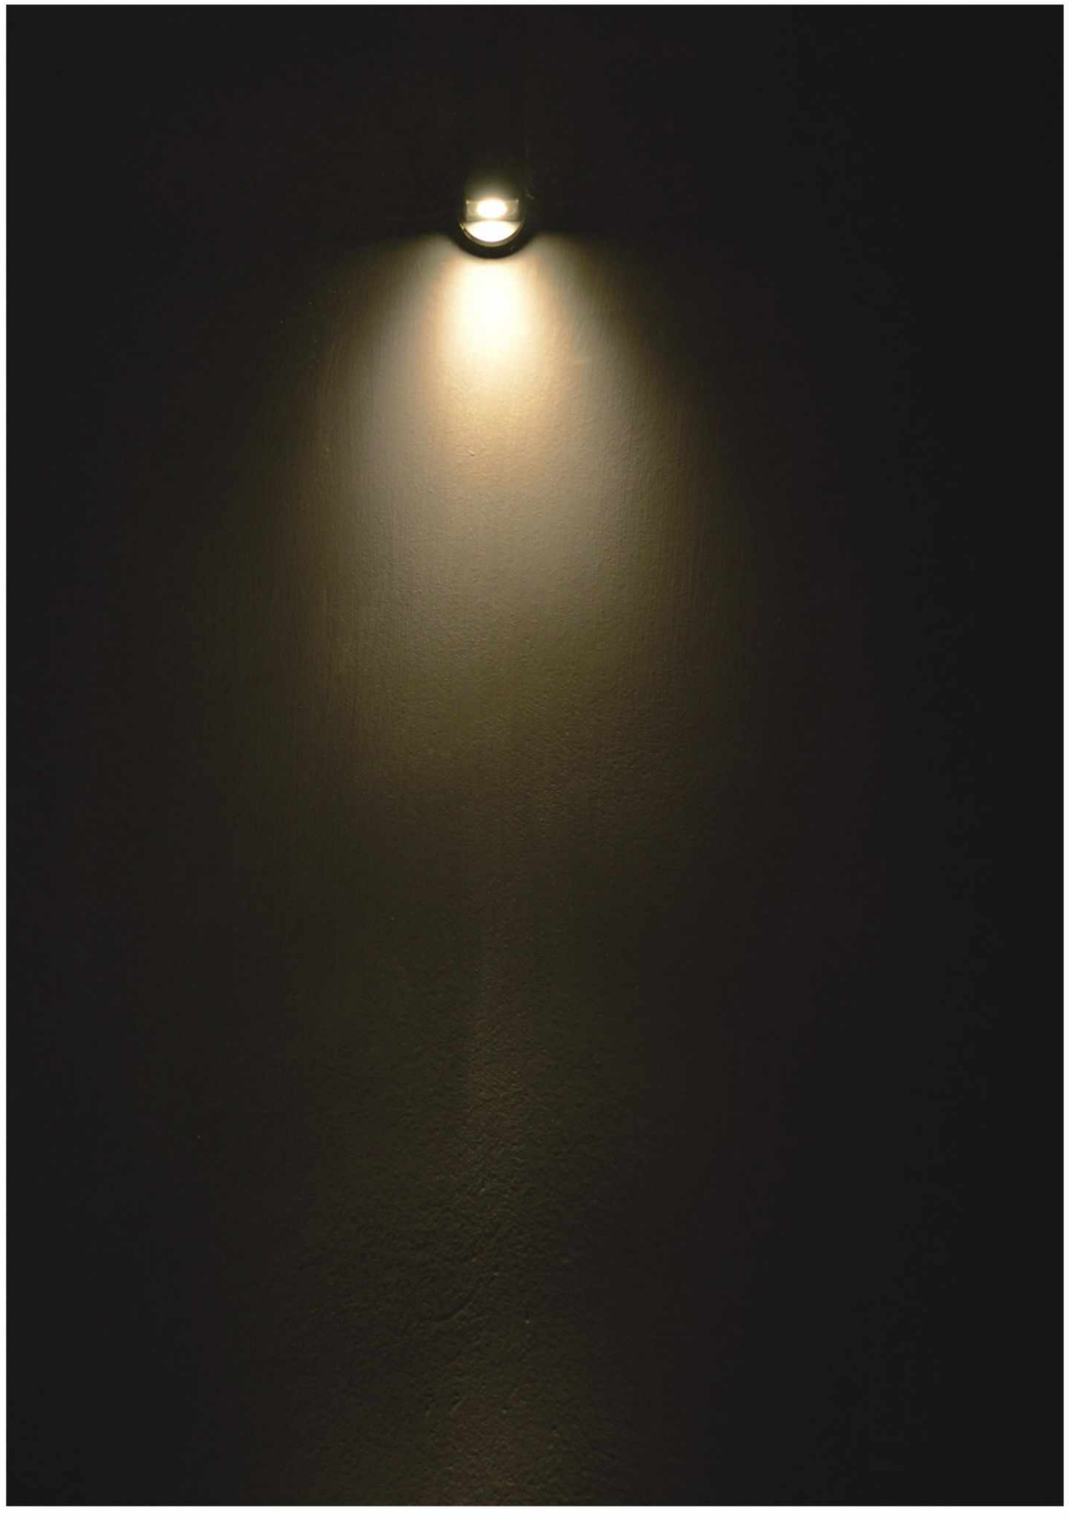

COAL IN □

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 2.1W
SYSTEM OUTPUT: 75Lm
INPUT: 100-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø28*43mm
HOLE SIZE: /

134611A

COAL IN □

LED POWER: 2.2W
LED OUTPUT: 168Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 157Lm
INPUT: 220-240VAC 50/60Hz
CRI: 80
DIMENSION: Ø28*43mm
HOLE SIZE: /

192711A

COAL ON □

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 2.1W
SYSTEM OUTPUT: 75Lm
INPUT: 100-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø28*30mm
HOLE SIZE: /

405511A

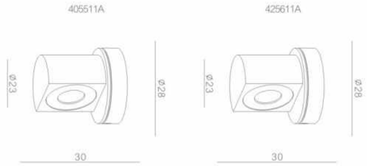

COAL ON □

LED POWER: 2.2W
LED OUTPUT: 168Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 157Lm
INPUT: 220-240VAC 50/60Hz
CRI: 80
DIMENSION: Ø28*30mm
HOLE SIZE: /

425611A

ANGLE 25°



1.1W 25° 3000K



1.1W 25° 3000K



OPTICS:

ANGLE 25°



1.1W 25° 3000K



1.1W 25° 3000K



OPTICS:

CUBO

CUBO is a new eye-catching architectural design,
a new step of lighting creation that erase the border between reality and abstraction.
CUBO with its 3D lighting performance bring us from dream to reality and back.
Sharp rectangular shape makes the light going according to the straight trajectory.
CUBO consists of two square lighting making mirror reflection from one to the other.
LED source and driver are integrated and hidden into the fitting.
CUBO is a great choice for residential areas, halls, hotels, office receptions.

CE IP20 220-240VAC

R L

CUBO R/L

LED POWER: 6.3W
CRI: 80
SYSTEM POWER: 8W
OUTPUT: 393Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 254*254*54mm
HOLE SIZE: /

C



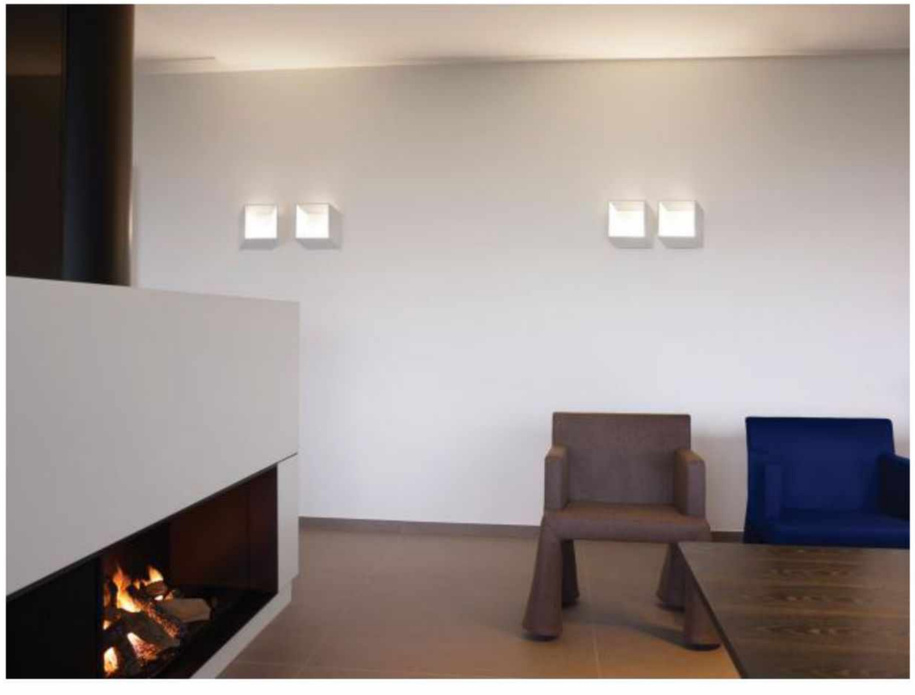

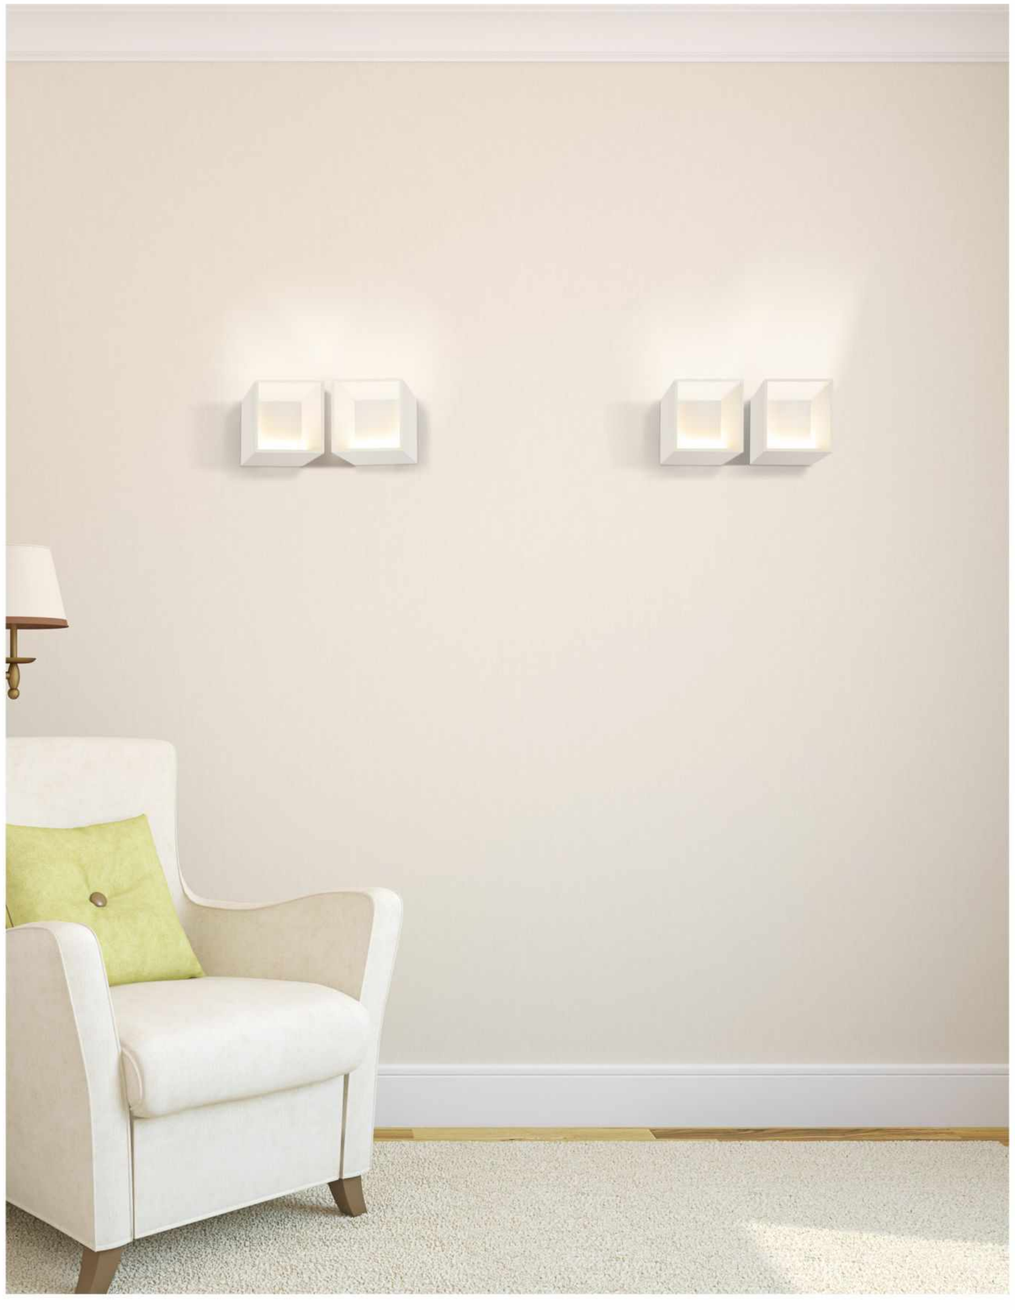

LONG



ROUND

CURES

Thin as paper with slightly curved side,
CURES is presented unique elegant design.
This splendid wall lamp is available in two versions,
CURES ROUND and CURES LONG.

CE IP20 100/220-240VAC

CURES ROUND

LED POWER:4W
CRI: 80
SYSTEM POWER:4.6W
OUTPUT: 192Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 160*121.2*40.4mm
HOLE SIZE: /

L

416011A



CURES LONG

LED POWER:6.4W
CRI: 80
SYSTEM POWER:7.5W
OUTPUT: 414Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 250*94.89*54.11mm
HOLE SIZE: /

L

416119A



COLOR FINISHINGS:

PCS-PAW

PAW

DREAM

Lighting as an art, forms beautiful and unforgettable shapes and performances,
turned to become a DREAM.
DREAM is a new design concept of wall lighting,
with the shape that reminds slightly opened book, giving light from its core.
DREAM is the best choice for residential areas, offices, hotels.

CE IP20 100-240VAC

425914A

DREAM

LED POWER:6.4W
CRI: 80
SYSTEM POWER:7.3W
OUTPUT: 525Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 230*75*55mm
HOLE SIZE: /



L

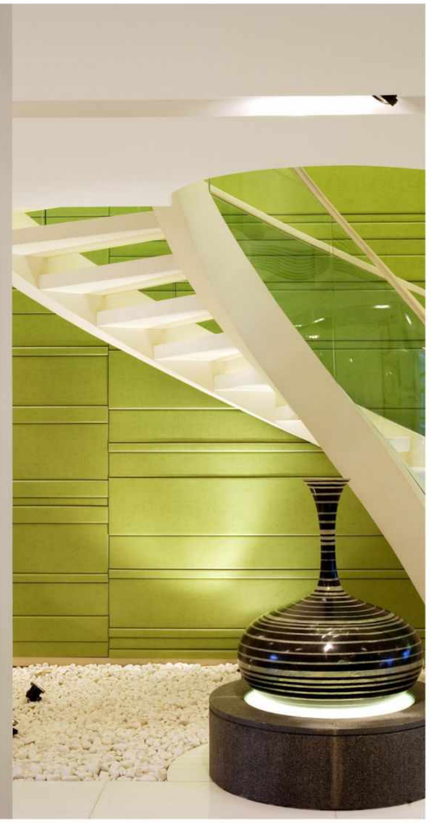

ELF

Best decorative effect is coming from pure simple forms and materials.
Pure transparent glass globe fixed on elegantly bended aluminum arm.
The light inside the glass creates unique lighting patterns in the room.
Be it residential or public spaces,
ELF is a great choice for wall lighting solution.

CE IP20 220-240VAC

428915A

ELF W

LED POWER:4.2W
CRI: 90
SYSTEM POWER:5.2W
OUTPUT: 233Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 150*229*192mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW

PAB

FISHING

The new concept of lighting is the best example of creativity.
Transparant suspended globe gives additional enigmatic
atmosphere to any space be it private or public area.

IP20 100/220-240VAC DIM TOUCH

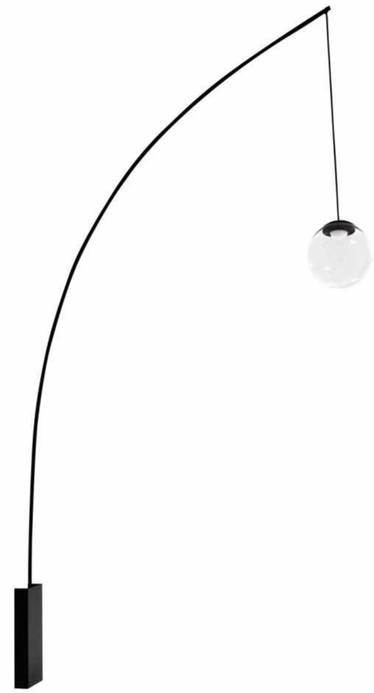

W

430215A



FISHING W

LED POWER: 4.2W
CRI: 90
SYSTEM POWER: 5.2W
OUTPUT: 233Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø150*1728mm
HOLE SIZE: /

L

F

FISHING F

LED POWER:15.7W
CRI: 93
SYSTEM POWER:17.5W
OUTPUT: 709Lm/3000K
INPUT: 100-240VAC
DIMENSION:Ø300*2800mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
433311

433311DT



FOLD

This splendid miniature wall mounted fitting
was specially designed to become an eye catcher model.
Thanks to its unique design,
FOLD can create enigmatic combinations on the wall playing with light and shades.
Special lens provides soft and clean light output.
There are no visible screws on the surface,
outer cover is fixed by magnetic mechanism and could be easily removed once necessary.

CE IP20 220-240VAC

O ROUND

I ROUND



O SQUARED



I SQUARED

FOLD O ROUND/O SQUARED

LED POWER:2.2W
CRI: 80
SYSTEM POWER:4W
OUTPUT: 96Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø101*32mm
101*101*32mm
HOLE SIZE: /



ANGLE 35°



2.2W 35° 3000K



2.2W 35° 3000K



FOLD I ROUND/I SQUARED

LED POWER:2*2.2W
CRI: 80
SYSTEM POWER:8W
OUTPUT: 192Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 131*51*32mm
HOLE SIZE: /



ANGLE 35°



2.2W 35° 3000K



2.2W 35° 3000K



COLOR FINISHINGS:

PAW - PAB

PAB - PAW

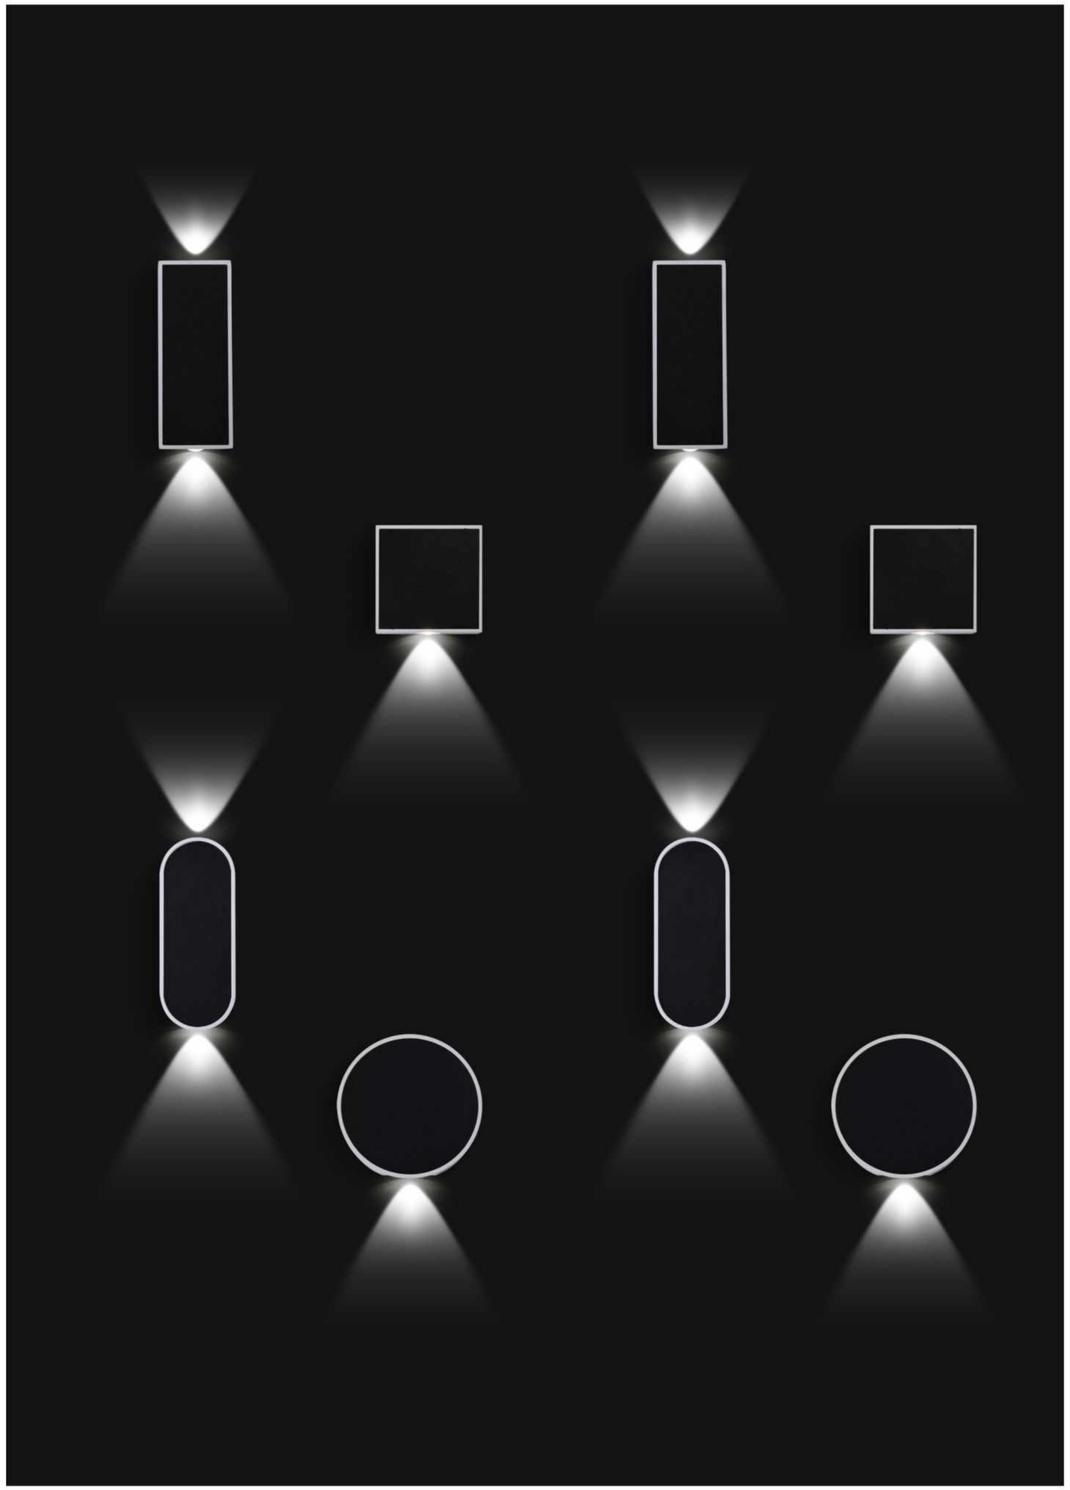

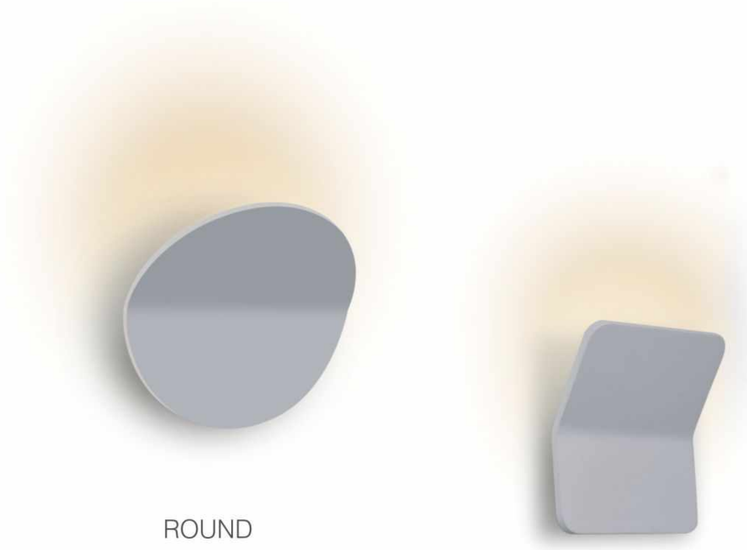

ROUND

SQUARED

GEMO

Simple elegant design of GEMO is making great decorative effect for the wall.
The indirect lighting is coming from inside of the fitting that is slightly bended in the middle.
GEMO can be perfectly integrated with almost any concept of interior design.
DIM function is included.

CE IP20 220-240VAC DIM TRIAC

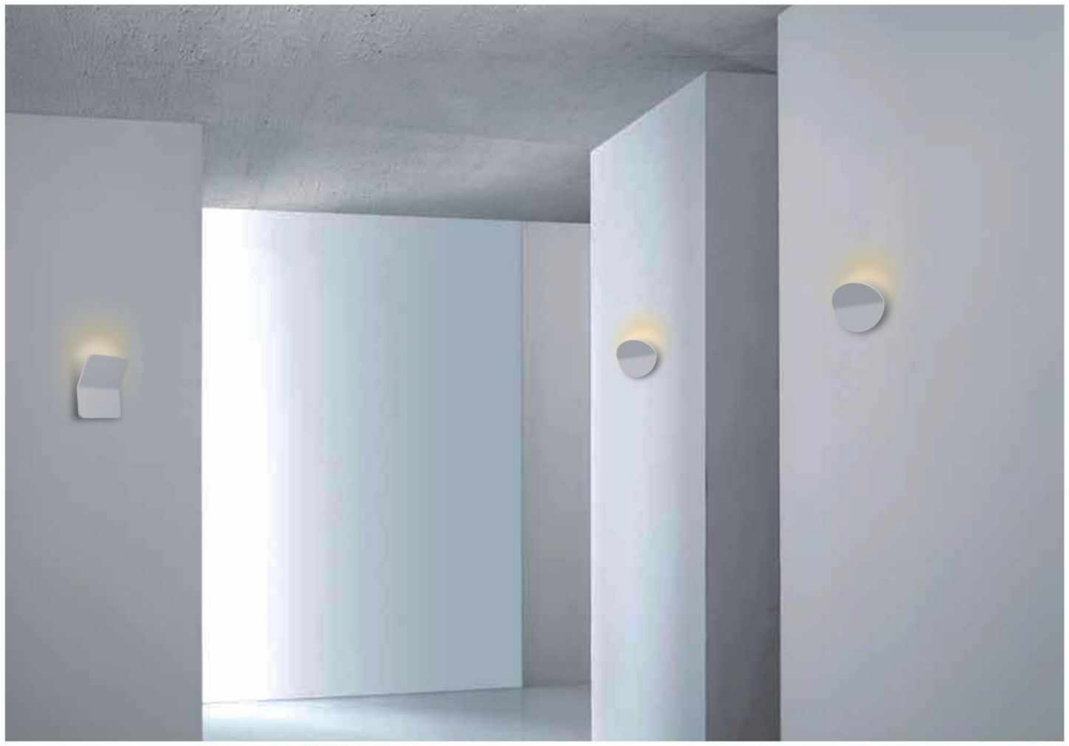

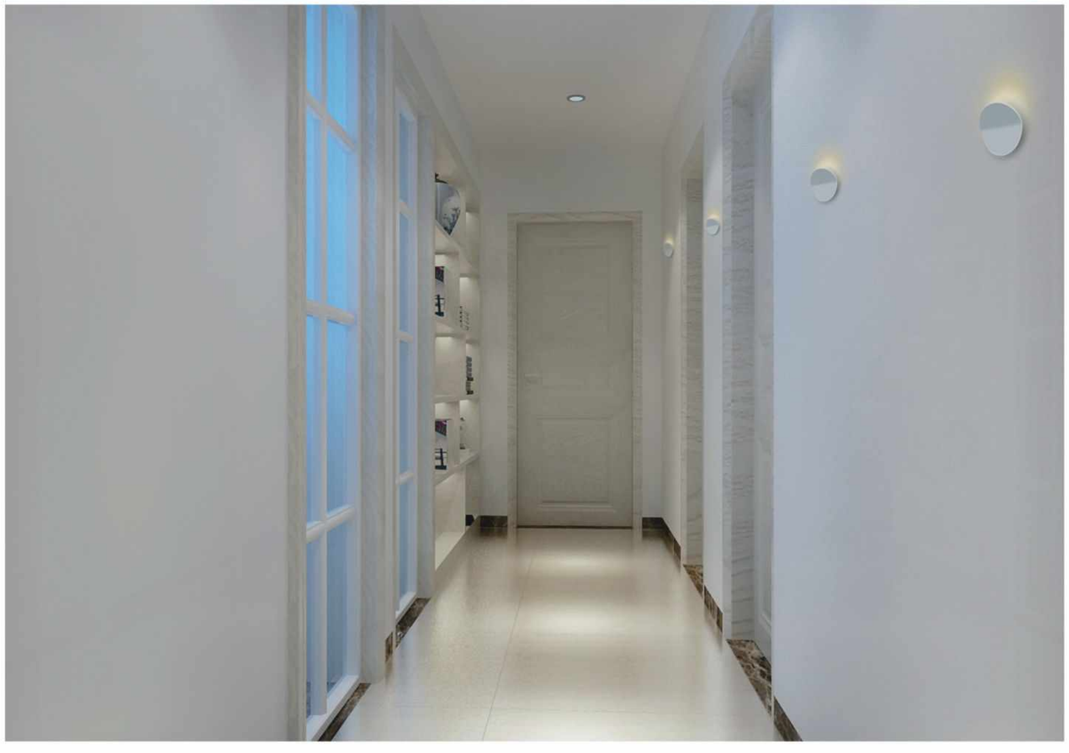

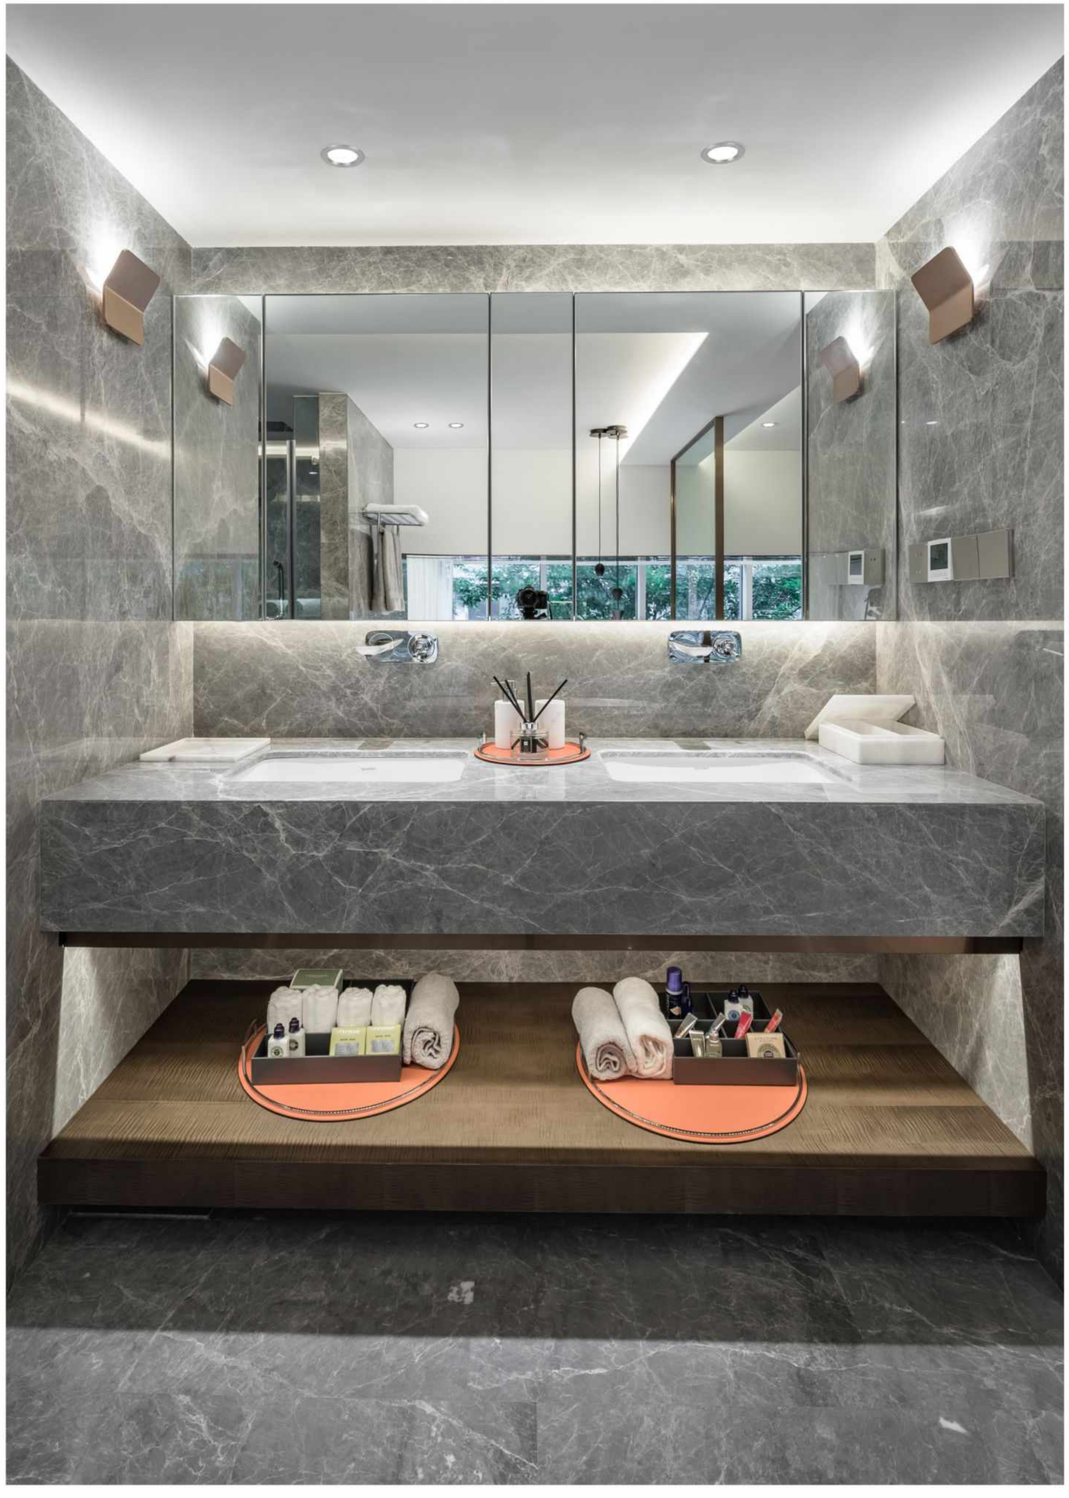

COLOR FINISHINGS:

PAW

PCY

PAB

PCS

GEMO ROUND / SQUARED

LED POWER: 3.7W/AC Module
CRI: 80
SYSTEM POWER:3.7W
OUTPUT: 325Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø160*61mm
150*150*63mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
414415DT/414515DT



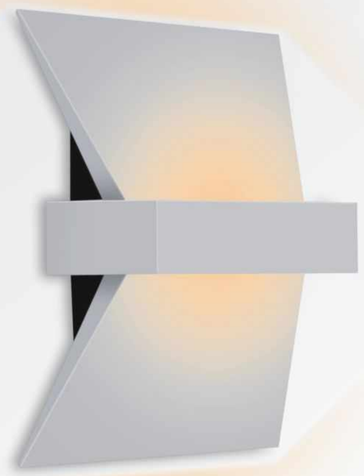

HEMLINE

HEMLINE is a great example of timeless design,
the art of light. Installed in a row one by one on the wall,
HEMLINE is creating enigmatic ornaments on the wall playing with light and shade.
It is a great choice for halls,
corridors and living rooms be it residential area or public space.

CE IP20 220-240VAC

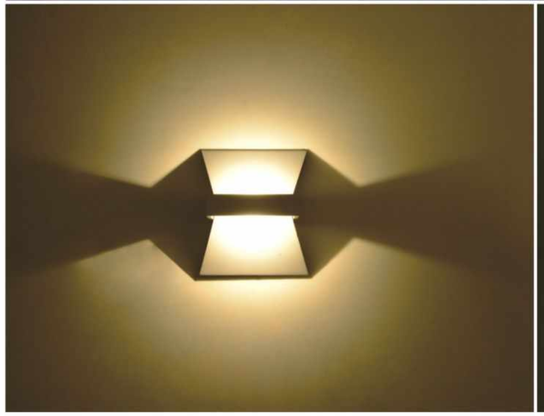

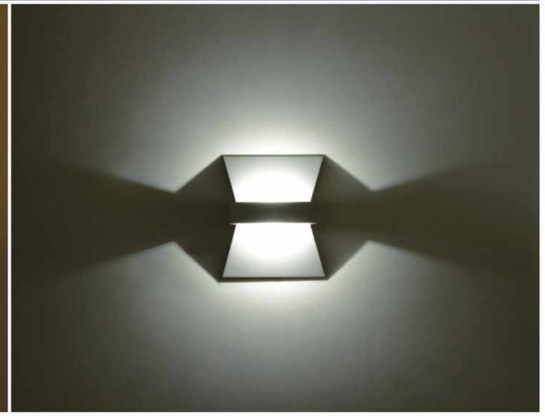

HEMLINE

LED POWER:6.7W
CRI: 80
SYSTEM POWER:8.4W
OUTPUT: 326Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 186*160*63mm
HOLE SIZE: /

L

420712EA



RS

KARINA

Special design of KARINA has already become one of classical collections.
Splendid aureole-shaped light is smoothly diffused on the wall around the lamp.
Aluminum cover fixed by special magnetic mechanism,
could be easily changed to create new patterns on the wall.
KARINA is available with different 4 designs and 2 sizes.
Combination of shapes, sizes and colors installed randomly on the wall,
can provide best decorative effect for any room.

CE IP20 100/220-240VAC

KARINA RS

LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 4W
OUTPUT: 248Lm/2700K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø125*38.5mm
HOLE SIZE: /

L

RM RHOMBUS

ST SO

KARINA RM

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 7.5W
OUTPUT: 525Lm/2700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø250*52.5mm
HOLE SIZE: /

427914



L

KARINA RHOMBUS

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 7.5W
OUTPUT:480Lm/2700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 223.3*182.5*52.5mm
HOLE SIZE: /

427714

L

KARINA ST / SO

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 7.5W
OUTPUT: 544Lm/2700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 227*231.5*52.5mm
220*173*52.5mm
HOLE SIZE: /

427614



427814



L

KUBIK

Pure geometry with sharp-edged cube form makes KUBIK remarkable and unique collection. In the KUBIK range you can choose between recessed or surface mounted versions, single or multiple light sources.
Each of them are available in wide range of color combinations.
Wall mounted version is a good addition to KUBIK design concept.
KUBIK ON has IP54 rate.

CE IP20 220-240VAC DIM TRIAC

WALL

KUBIK WALL

LED POWER: 15.47W
LED OUTPUT: 1758Lm/3000K
SYSTEM POWER: 18.3W
SYSTEM OUTPUT: 1087Lm/3000K
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: 119*91*77mm
HOLE SIZE: /

416212EDT



ANGLE 36°



15.47W 36° 3000K



15.47W 36° 3000K



RECOMMEND

DIM TRIAC
416212EDT

ONE

TWIST

LIGHTBAR

Long tube with diffused light is the key idea for LIGHTBAR design concept.
Specially recommended as mirror lamp.
Available in 2 versions: fixed and routable that could be rotated by 350 degrees.

CE IP20 220-240VAC

LIGHTBAR ONE

LED POWER: 9.3W
CRI: 80
SYSTEM POWER: 11.5W
OUTPUT: 702Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 540*165*27mm
HOLE SIZE: /

L



LIGHTBAR TWIST

LED POWER: 9.3W
CRI: 80
SYSTEM POWER: 11.5W
OUTPUT: 724Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 947*58.4*45mm
HOLE SIZE: /

L

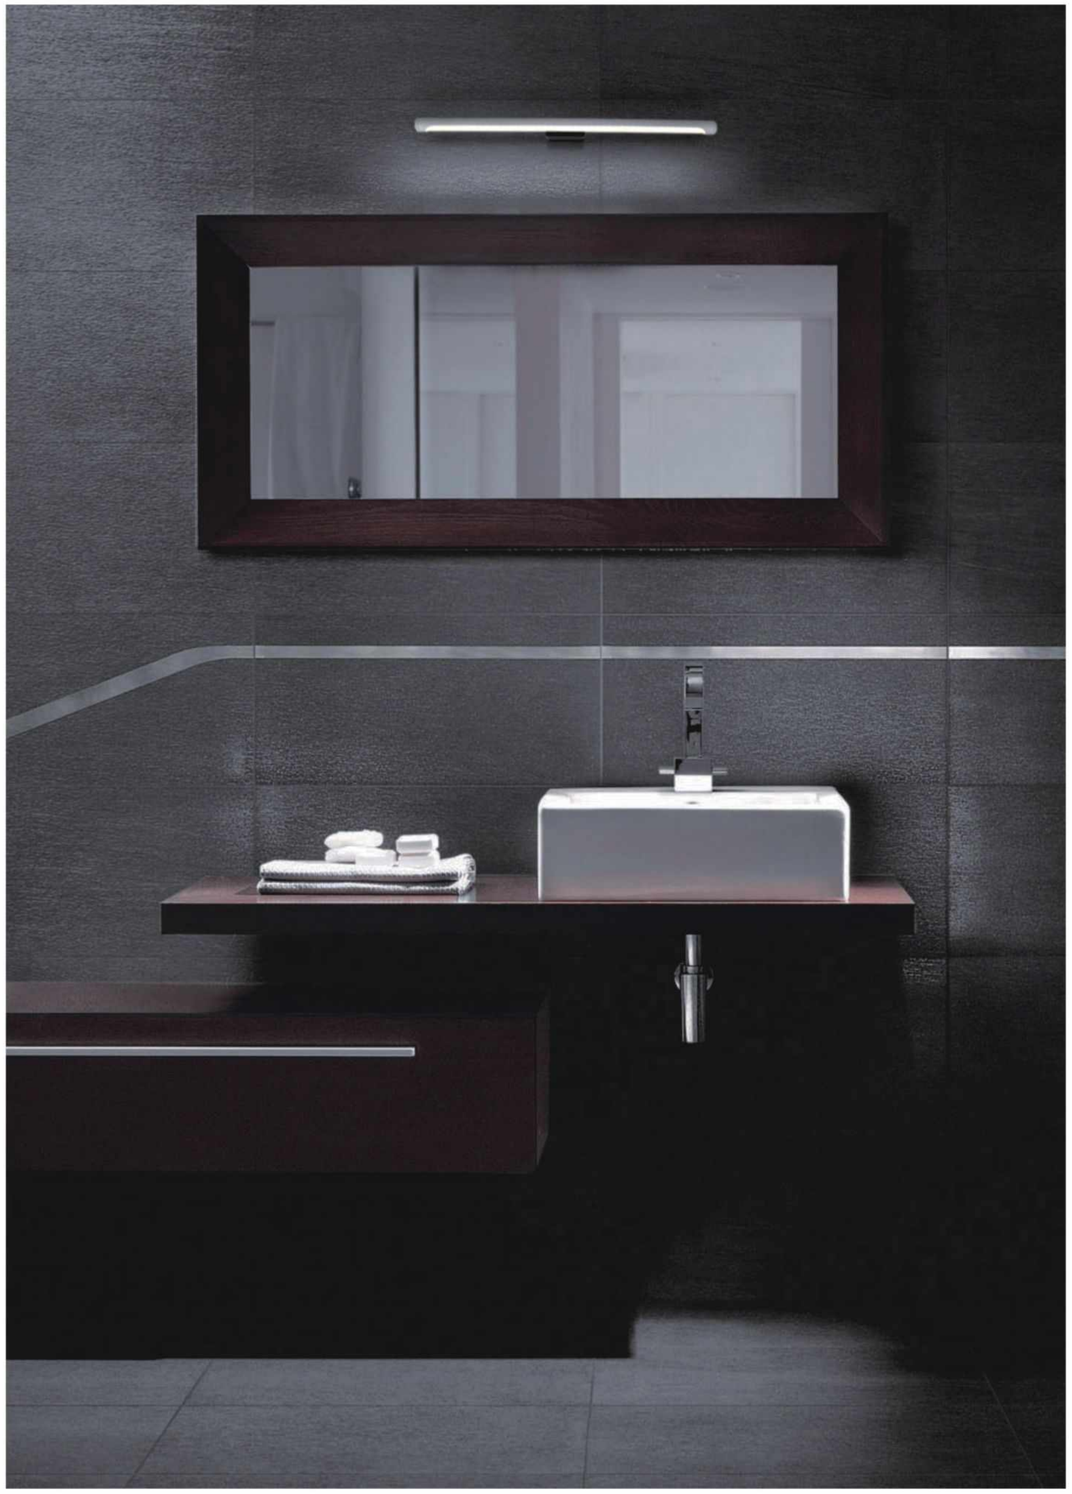

LIGHTBAR

LIRA

LIRA is a new step in design,
a combination of light and furniture.
Bed side lighting fitting is available with bell shaped or stone shapes lamps.
Both versions create atmosphere of romance
and harmony to any bedroom.

LIRA F special floor lamp is continuing the concept design of LIRA series.
This unique floor lamp is equipped with USB slot.
LIRA F is going with DIM function.

IP20 100/220-240VAC DIM PUSH USB CHARGER

W

LIRA W

422714A

LED POWER: 2W
CRI: 90
SYSTEM POWER: 2.4W
OUTPUT: 30Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 320*160*65mm
HOLE SIZE: /



L

W2 R

W2 L

W3 R

W3 L

LIRA W2 R /LIRA W2 L

LED POWER: 8W
CRI: 90
SYSTEM POWER: 9.4W
OUTPUT: 268Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 320*160*291mm
HOLE SIZE: /

L

422812EA



422512EA



LIRA W3 R /LIRA W3 L

LED POWER: 8W
CRI: 90
SYSTEM POWER: 9.4W
OUTPUT: 371Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 320*160*136mm
HOLE SIZE: /

L

422612EA



422912EA



DIM LED POWER: 2+2W

DIM LED POWER: 6W

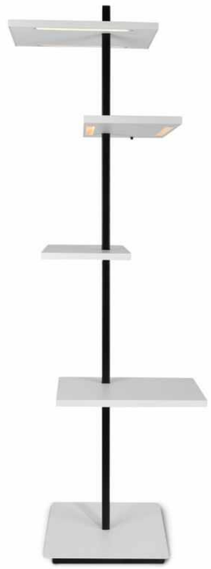

F5G

423512EA

LIRA F5G

LED POWER: 22W
CRI: 90
SYSTEM POWER: 25.9W
OUTPUT: 677Lm/3000K
INPUT: 100-240VAC ,50/60Hz
DIMENSION: 1330*310*310mm
HOLE SIZE: /

L

RECOMMEND

DIM PUSH
423512EA



F5C

427019EA

LIRA F5C

LED POWER: 22W
CRI: 80
SYSTEM POWER: 25.9W
OUTPUT: 478Lm/3000K
INPUT: 100-240VAC ,50/60Hz
DIMENSION: 1318*310*310mm
HOLE SIZE: /

L

RECOMMEND

DIM PUSH
427019EA



F5

426914EA

LIRA F5

LED POWER: 13W
CRI: 80
SYSTEM POWER: 14.5W
OUTPUT: 240Lm/3000K
INPUT: 100-240VAC ,50/60Hz
DIMENSION: 1318*310*310mm
HOLE SIZE: /

L

RECOMMEND

ON/OFF
426914EA

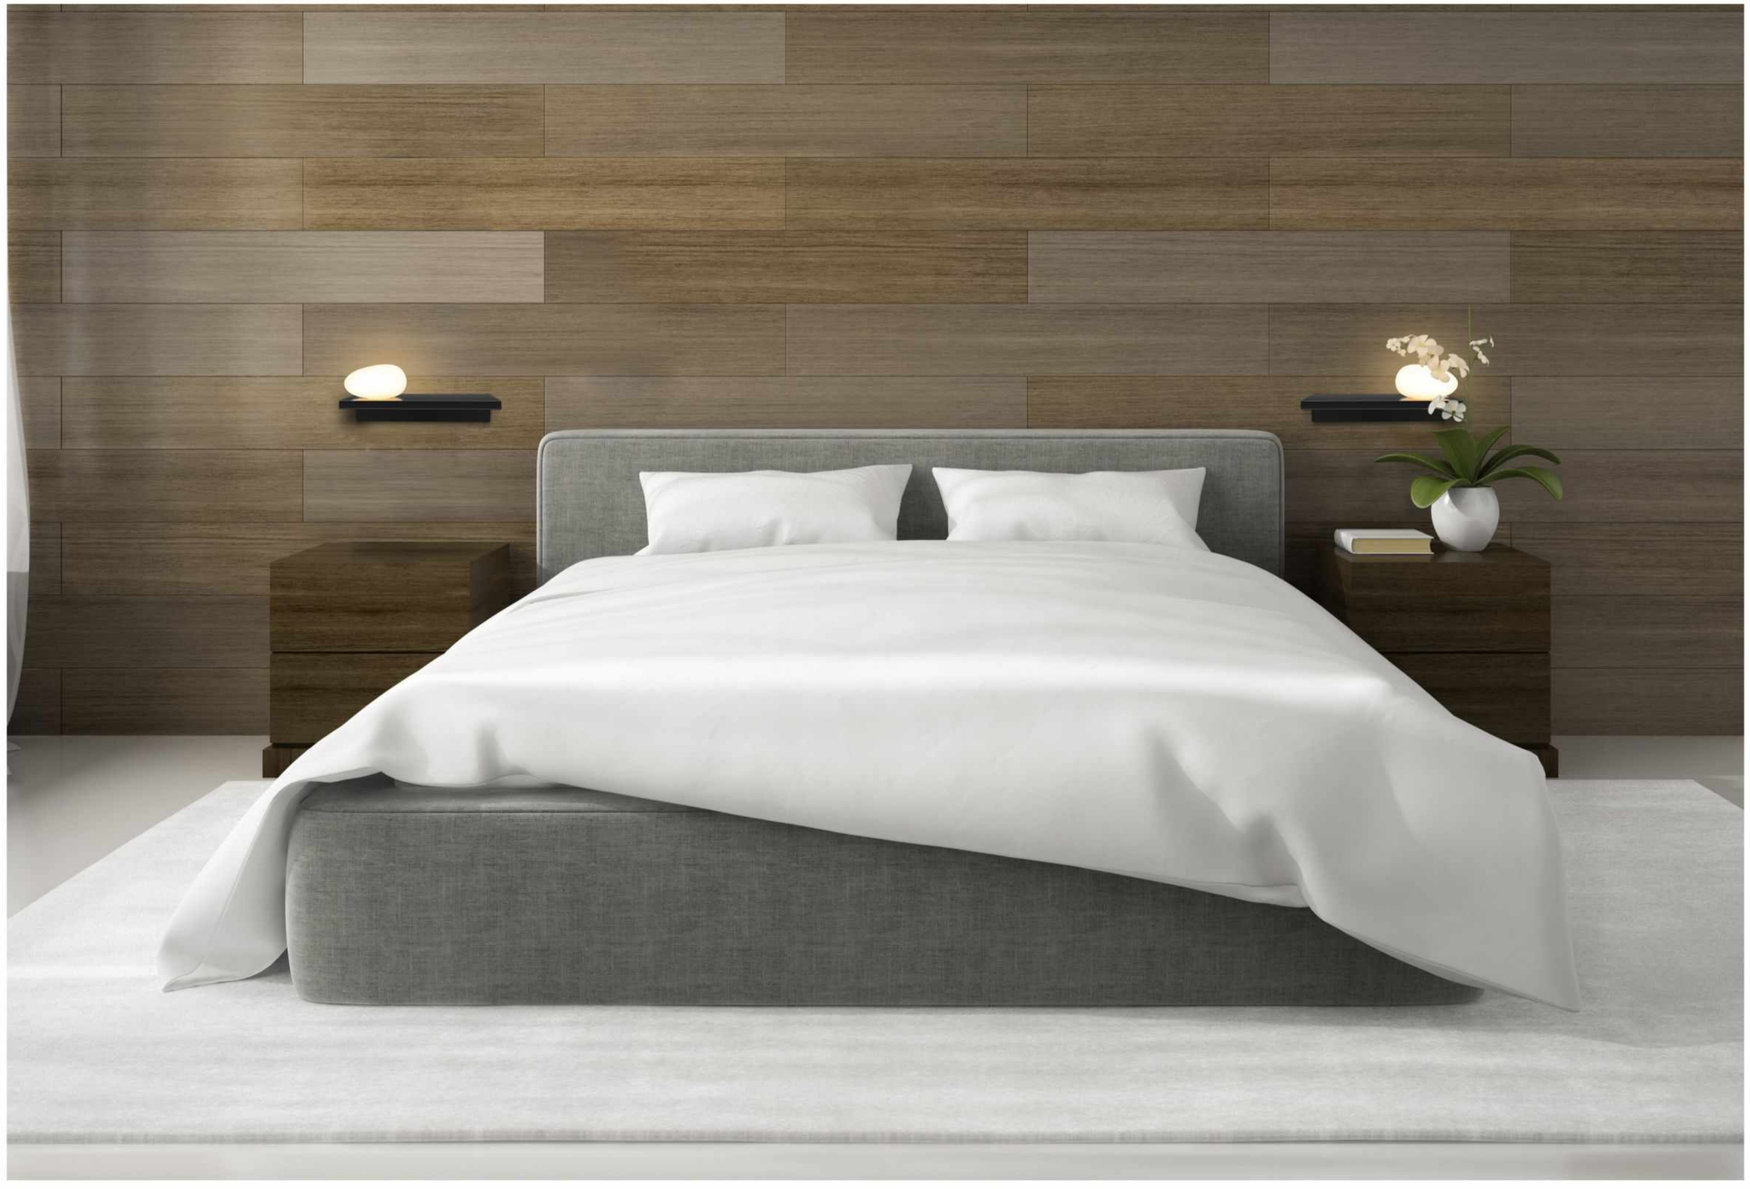

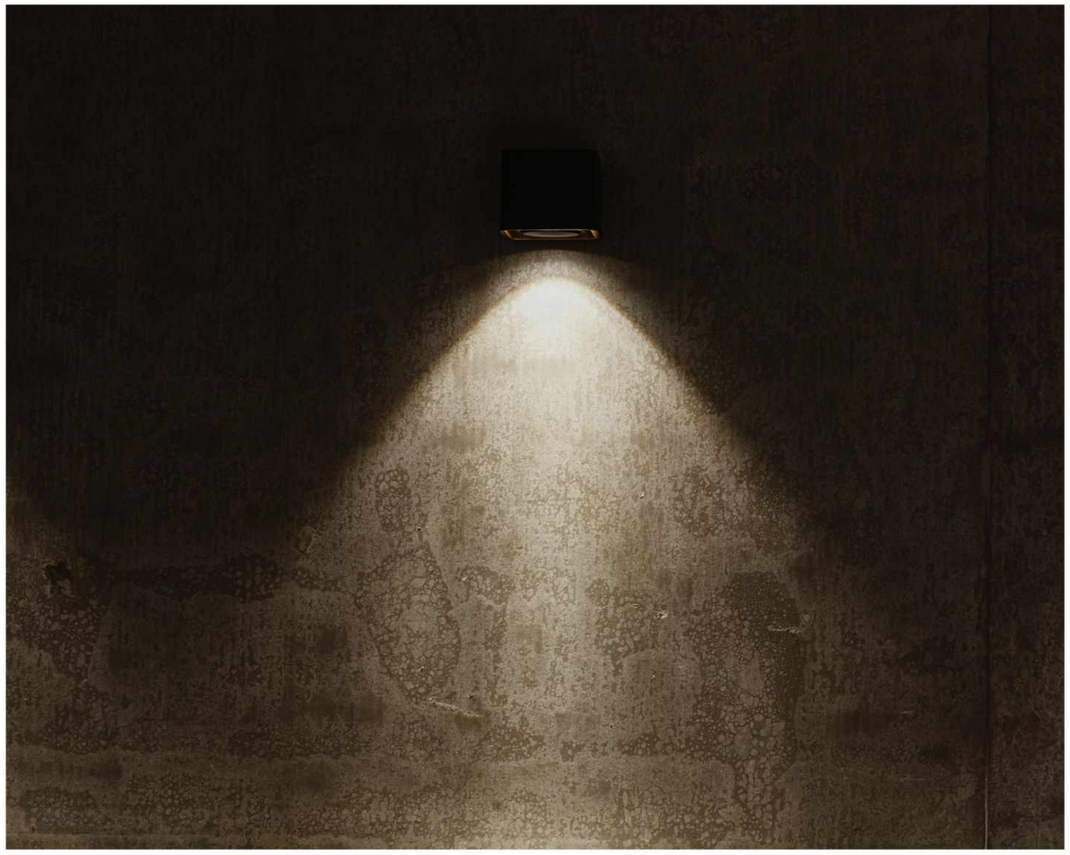

LUXURY

LUXURY, as its name indicates, can give additional luxurious and elegant detail to any room, be it residential or public spaces.
This splendid surface mounted downlight is presented with single or double versions.
To extend the collection, LUXURY ON LONG version was created.

LUXURY can be used in an elegant combination of wall mounted and ceiling mounted variants. Aesthetics and functionality are the key words to describe LUXURY collection.
Various of color combinations are available for choice.
In addition, the product has adjustable function.

CE IP20 100-240VAC

WALL SINGLE

WALL DOUBLE

COLOR FINISHINGS:

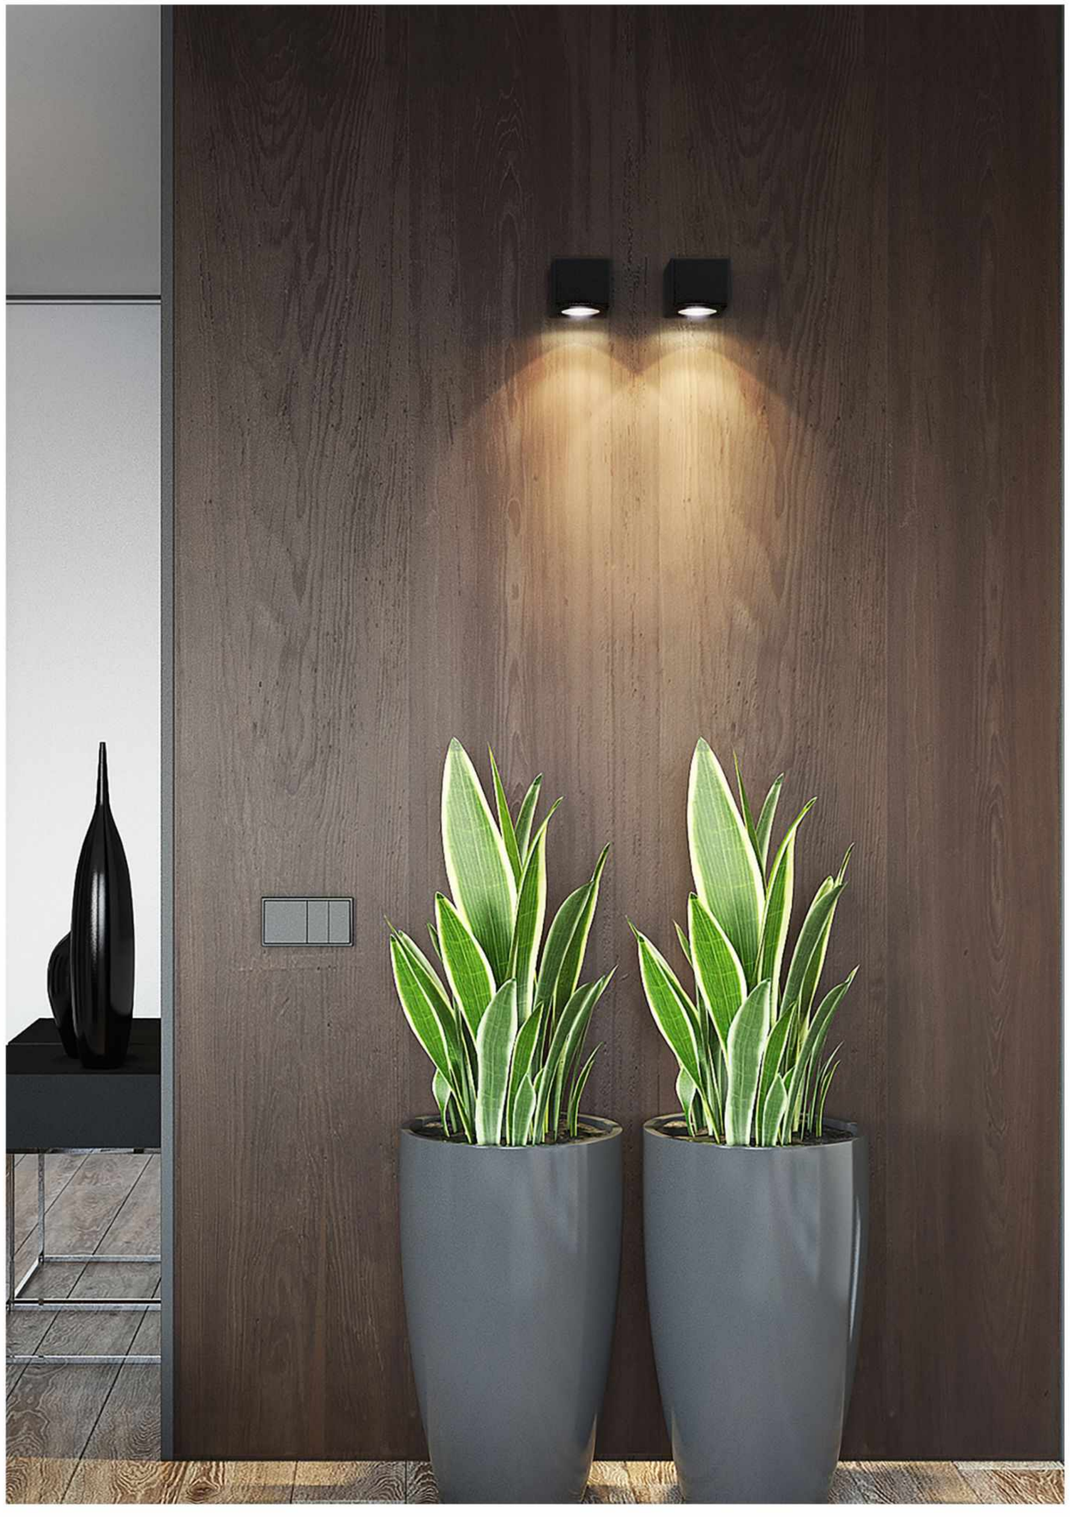

LUXURY WALL SINGLE

LED POWER: 9.35W
LED OUTPUT: 1009Lm/3000K
SYSTEM POWER: 11.4W
SYSTEM OUTPUT: 720Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 113*102*85mm
HOLE SIZE: /

409412EA



LUXURY WALL DOUBLE

LED POWER: 2*9.25W
LED OUTPUT: 1009Lm/3000K
SYSTEM POWER: 2*11.4W
SYSTEM OUTPUT: 1440Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 195.5*113*85mm
HOLE SIZE: /

409522EA



Angle 36°



9.35W 36° 3000K



9.35W 36° 3000K



OPTIONS:

OPTICS:









MIRO

Wall lamp with diffused light that could be easily adjusted however needed.
Can be used as lamp for mirror, painting or other objects on the wall.
Available in 2 sizes 300 mm and 550 mm.

IP20 220-240VAC

MIRO 300

LED POWER: 9.6W
CRI: 80
SYSTEM POWER: 10.3W
OUTPUT: 725Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 300*115.5*20mm
HOLE SIZE: /

L

418714A

COLOR FINISHINGS:

PAW PAB

MIRO 550

LED POWER: 16.8W
CRI: 80
SYSTEM POWER: 18.9W
OUTPUT: 1535 Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 548*115.5*20
HOLE SIZE: /

L

418814A

COLOR FINISHINGS:

PAW PAB

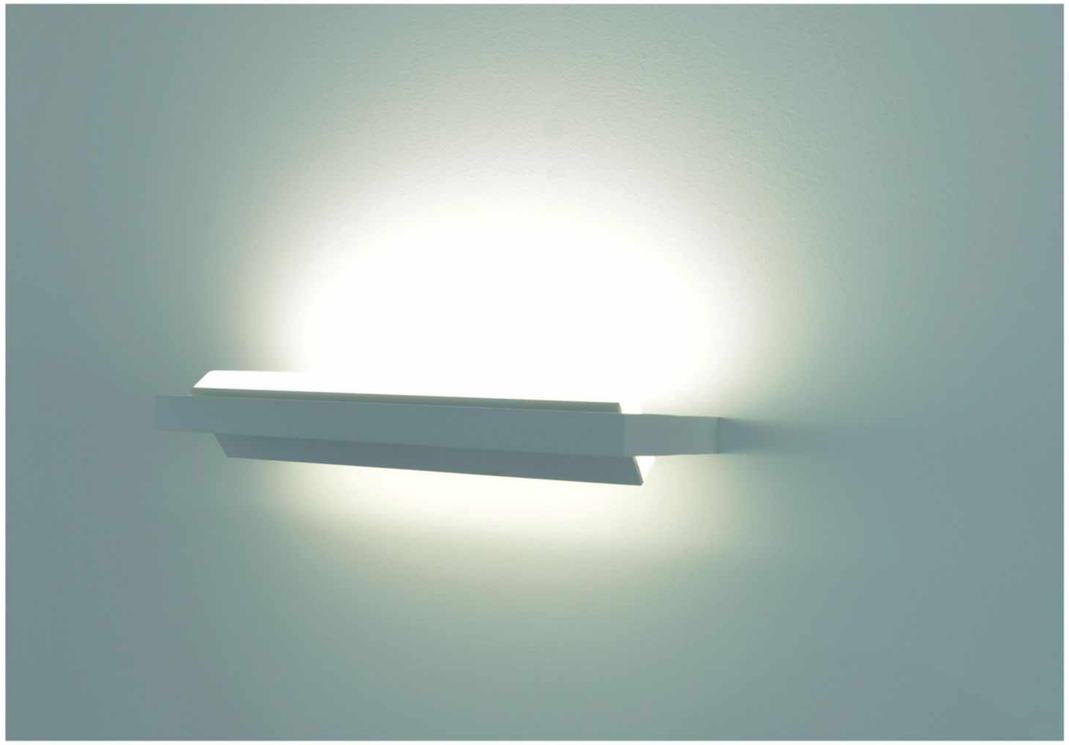

MOON

We strongly believe beauty is coming from natural simple forms.
Spherical shape of MOON series with its perfect indirect light,
gives romantic atmosphere to any premises.

Combination of small round lights mounted on the wall gives additional decorative
function to the room, creating elegant light performance.

Thanks to its small shape MOON can be good choice both for small rooms.

CE IP20 220-240VAC

MOON

421614A

LED POWER: 2.2W
CRI: 80
SYSTEM POWER:3W
OUTPUT: 150Lm/3000K
INPUT: 220-240VAC,50/60Hz

L

SET

Very impressive and nicely delineated parabolic light
creates perfect light patterns on the wall.
Thanks to newest technical achievements of LED and lens,
SET produces special light effect,
playing with light and shade on the wall.
Single use or in combination SET always provides special beauty for any room.

IP20 220-240VAC DIM TRIAC

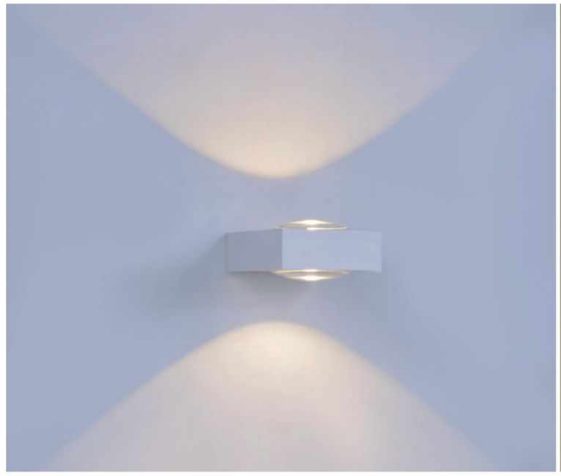

SET

LED POWER:7.8W/AC LED
SYSTEM POWER:7.8W
SYSTEM OUTPUT: 654Lm/3000K
INPUT: 220-240VAC, 50/60Hz
CRI: 80
DIMENSION: 100*70*40mm
HOLE SIZE: /

416615DT



ANGLE C



7.8W C 3000K



7.8W C 3000K



RECOMMEND

DIM TRIAC
416615DT

SHELL

Extending wall light collection,
has created new range SHELL.
Simple and elegant design of SHELL makes this model very popular.
Thanks to various color combinations
SHELL can be easily integrated to any interior design concept
of the room be it residential or public space.
Round and square shapes are available.

IP20 220-240VAC DIM TRIAC

ROUND

SQUARE

SHELL ROUND / SQUARE

LED POWER:3.9W/AC Module
CRI: 80
SYSTEM POWER:3.9W
OUTPUT: 325Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 150*87*83mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC 414615DT

DIM TRIAC 414715DT

414615DT

414715DT



SINE

This minimalist wall lamp is a great solution as auxiliary lighting.
The light comes from one or both sides.
SINE gives perfect lighting and decorative effect to any room.
Recommended for bed rooms, corridors, living rooms.

CE IP20 220-240VAC

S

S DOUBLE

SINE S

LED POWER: 3.2W
CRI: 80
SYSTEM POWER: 3.6W
OUTPUT: 159Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 270*76*27.5mm
HOLE SIZE: /

419814A

L

SINE S DOBOLLE

LED POWER: 6.4W
CRI: 80
SYSTEM POWER: 7.2W
OUTPUT: 318Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 270*96*27.5mm
HOLE SIZE: /

419714A

L

COLOR FINISHINGS:

PAW PAB

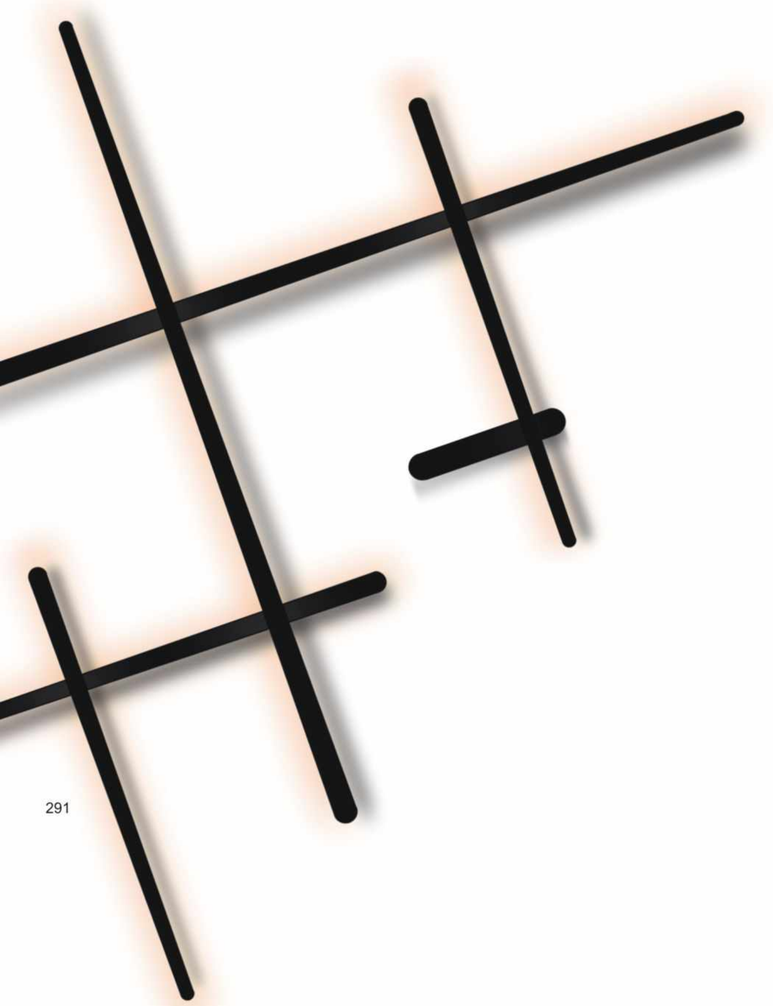

SONG

SONG is a new example of a deep integration of light and architectural solutions.
Light has no more limits.
SONG is available in 3 designs.
Each element of the fitting can be freely oriented and rotated in any direction whatever needed, endlessly creating new unique ideas for inspiration.

CE IP20 100-240VAC DIM 1-10V



C



D



E

SONG C

CRI: 80
SYSTEM POWER:33W
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1855*1375*60mm
HOLE SIZE: /

414034DX



L

RECOMMEND

DIM 1-10V
414034DX

SONG D

CRI: 80
SYSTEM POWER:47W
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 1855*1786.5*60mm
HOLE SIZE: /

414144DX



L

RECOMMEND

DIM 1-10V
414144DX

SONG E

CRI: 80
SYSTEM POWER:54W
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 1855*1786.5*60mm
HOLE SIZE: /

414254DX



L

RECOMMEND

DIM 1-10V
414254DX

COLOR FINISHINGS:

PAB PAW

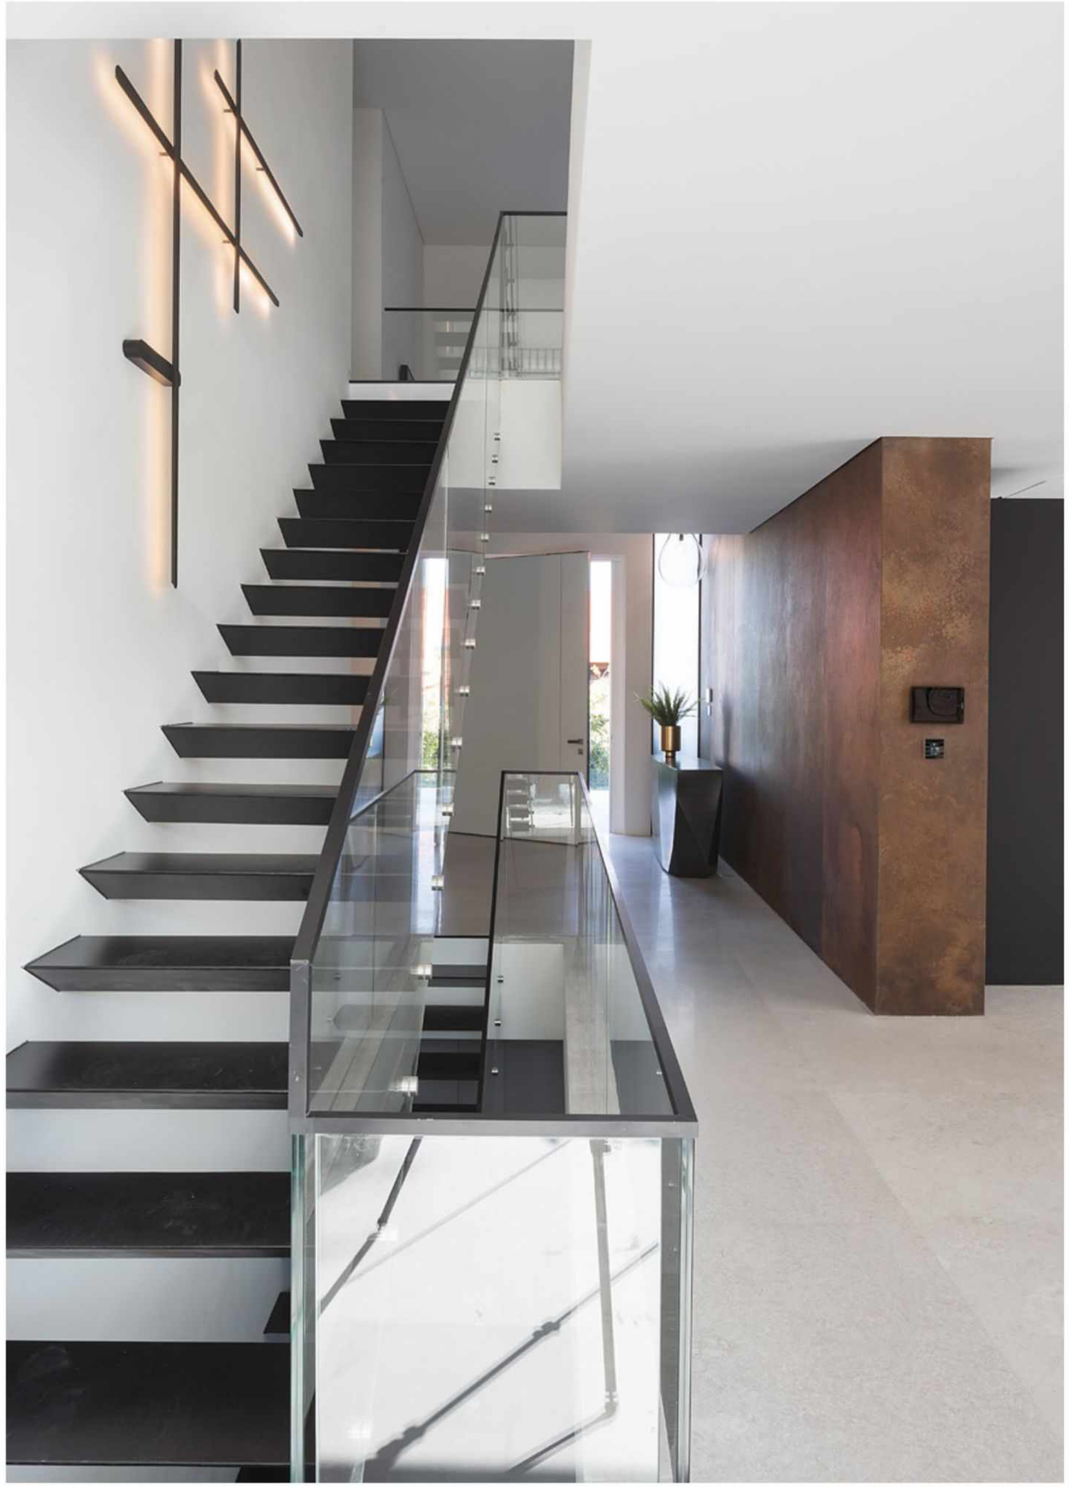

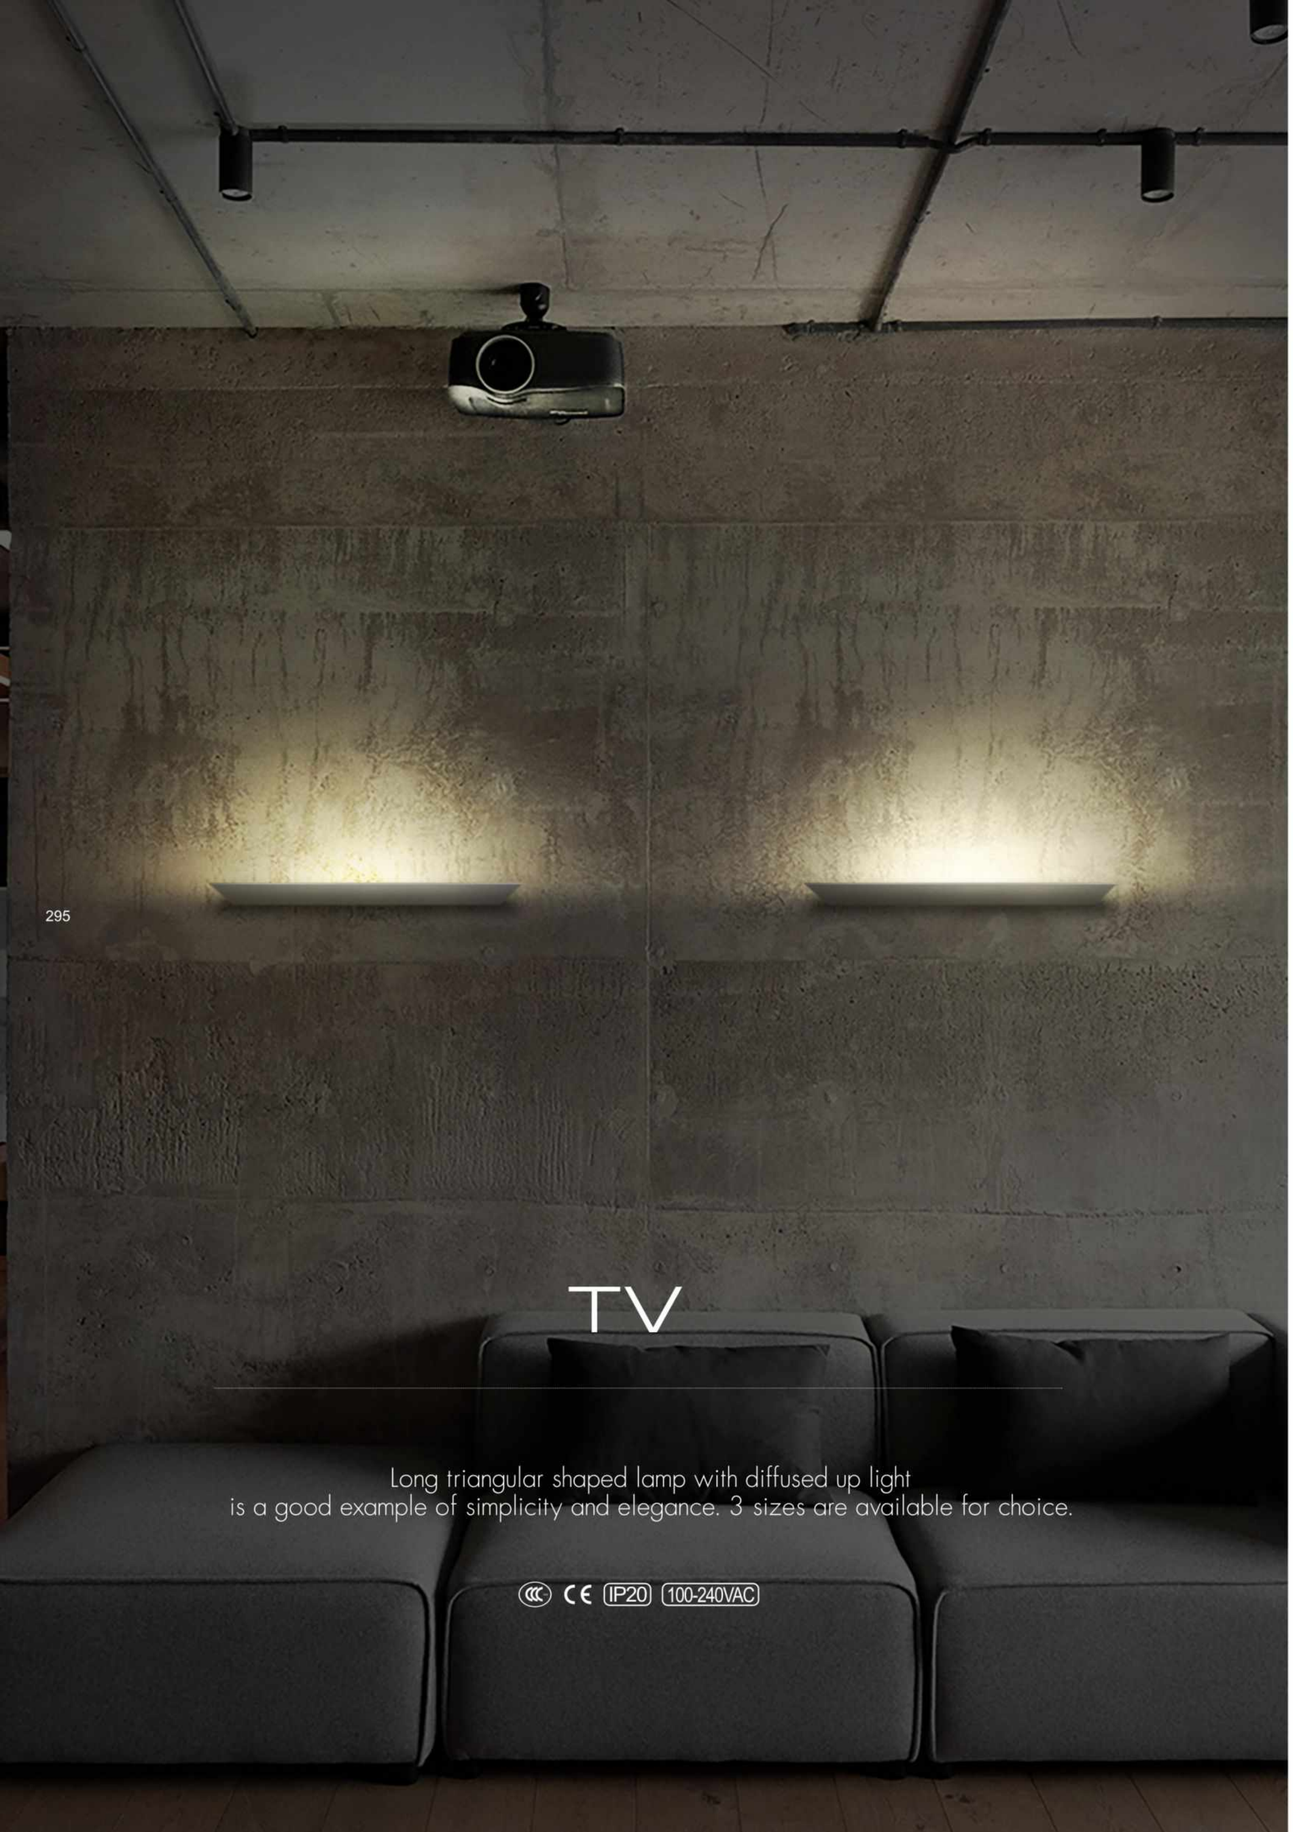

TV

Long triangular shaped lamp with diffused up light
is a good example of simplicity and elegance. 3 sizes are available for choice.

IP20 100-240VAC

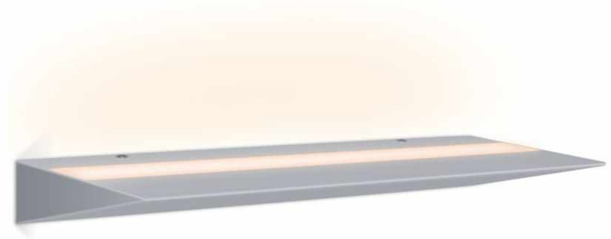

S/M/L
S+/M+/L+

TV S

LED POWER:12W
CRI: 80
SYSTEM POWER:13.57W
OUTPUT: 1065Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 318*120.5*35mm
HOLE SIZE: /

TV M

LED POWER:17W
CRI: 80
SYSTEM POWER:18.41W
OUTPUT: 1480Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 618*120.5*35mm
HOLE SIZE: /

TV L

LED POWER:23.86W
CRI: 80
SYSTEM POWER:25.57W
OUTPUT: 2049Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 918*120.5*35mm
HOLE SIZE: /

TV S+

LED POWER:23.86W
CRI: 80
SYSTEM POWER:27.6W
OUTPUT: 1978Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 318*120.5*35mm
HOLE SIZE: /

TV M+

LED POWER:2*23.86W
CRI: 80
SYSTEM POWER:56W
OUTPUT: 3637Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 618*120.5*35mm
HOLE SIZE: /

TV L+

LED POWER:3*23.86W
CRI: 80
SYSTEM POWER:84.9W
OUTPUT: 5420Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 918*120.5*35mm
HOLE SIZE: /

420814A / 436514A



L

420914A / 436614A



L

421014A / 436714A



L

S 280

S 530

S 1030

S 2030

WALL LINE 2.0

This splendid wall lamp with wide selection of sizes
is perfect choice for auxiliary lighting in the room.
WALL LINE comes in one side lighting or up and down version.
Length of the fixture could be customized
according to the interior design requirement.

CE IP20 220-240VAC

WALL LINE 2.0 S 280

LED POWER:3.2W
CRI: 80
SYSTEM POWER:3.6W
OUTPUT: 184Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 273*76*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 S 530

LED POWER:7.2W
CRI: 80
SYSTEM POWER:8.3W
OUTPUT: 460Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 523*76*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 S 1030

LED POWER:14.4W
CRI: 80
SYSTEM POWER:16.35W
OUTPUT: 992Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 1023*76*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 S 2030

LED POWER:28.8W
CRI: 80
SYSTEM POWER:32.75W
OUTPUT: 1724Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 2030*76*27.5mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW PAB

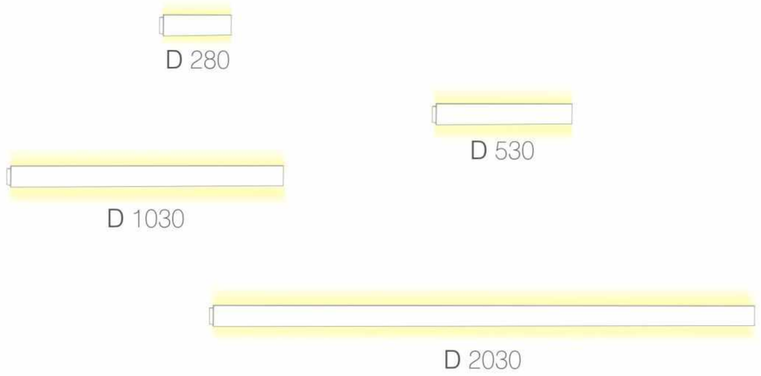

WALL LINE 2.0 D 280

LED POWER:6.4W
CRI: 80
SYSTEM POWER:7.2W
OUTPUT: 318Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 273*96*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 D 530

LED POWER:14.4W
CRI: 80
SYSTEM POWER:16.6W
OUTPUT: 836Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 523*96*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 D 1030

LED POWER:28.8W
CRI: 80
SYSTEM POWER:32.7W
OUTPUT: 1672Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 1023*96*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 D 2030

LED POWER:57.6W
CRI: 80
SYSTEM POWER:65.5W
OUTPUT: 3344Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 2023*96*27.5mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW PAB

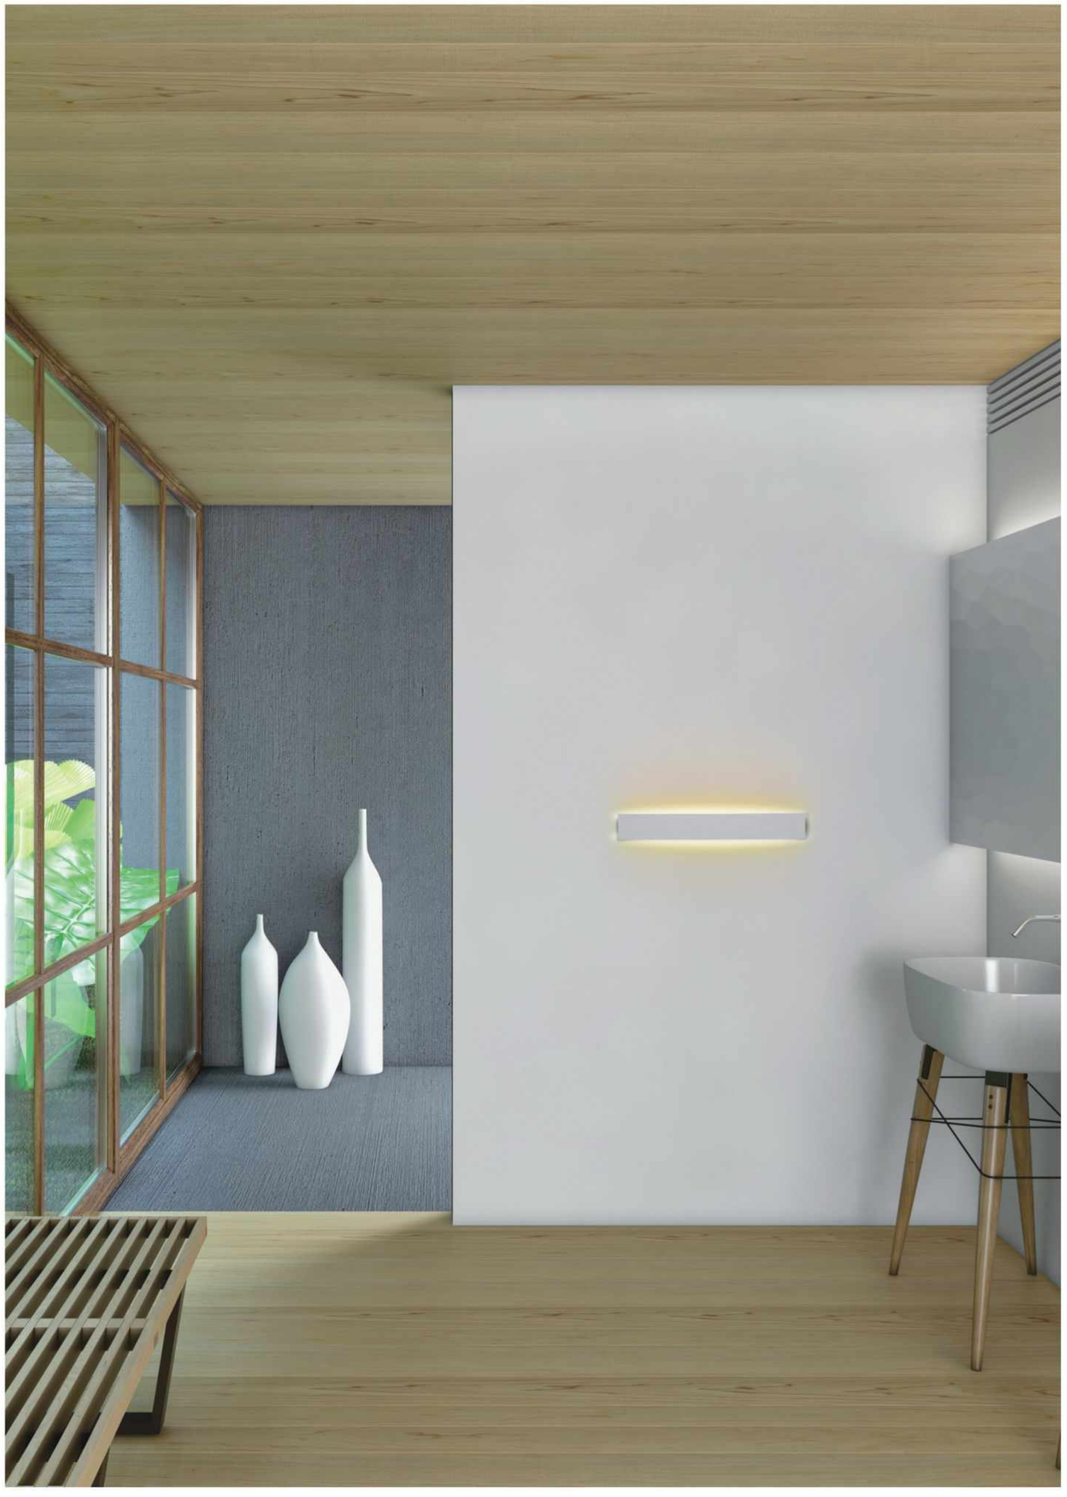

WING

Just like a bird's fly,
WING could provide beautiful feeling of freedom and perfection of natural forms.
The unique design and elegant light effect confirming
longstanding philosophy for timeless design.
WING could be great choice for both residential and hospitality application.

CE IP20 220-240VAC

WING

LED POWER: 9.2W
CRI: 80
SYSTEM POWER: 11.2W
OUTPUT: 845Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 240*90*57.5mm
HOLE SIZE: /

L

423414A



WALL ROTARY

DONNA 1
308

DONNA 3
309

LEGGO
312

OTLY IN IO
313

OTLY IN ROUND
313

ROSA
318

TATOU USB
320

TATOU BOX
321

TATOU BOX IO
321

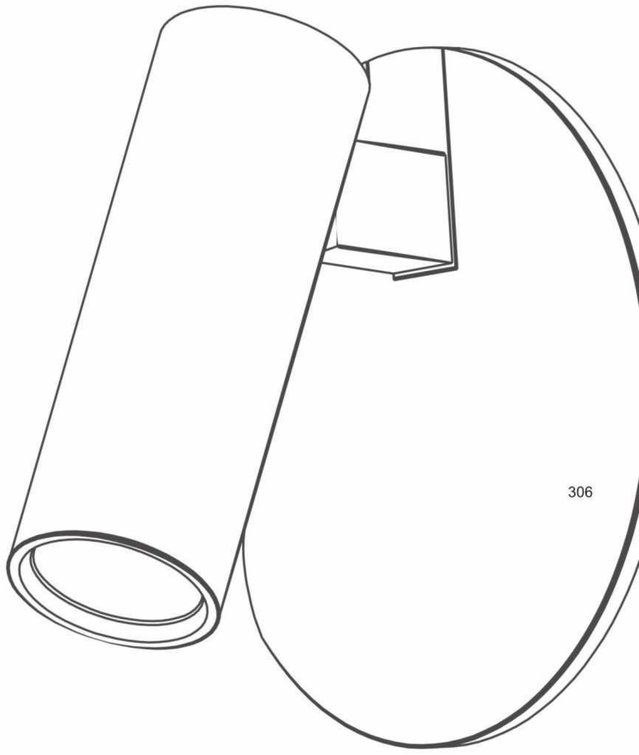

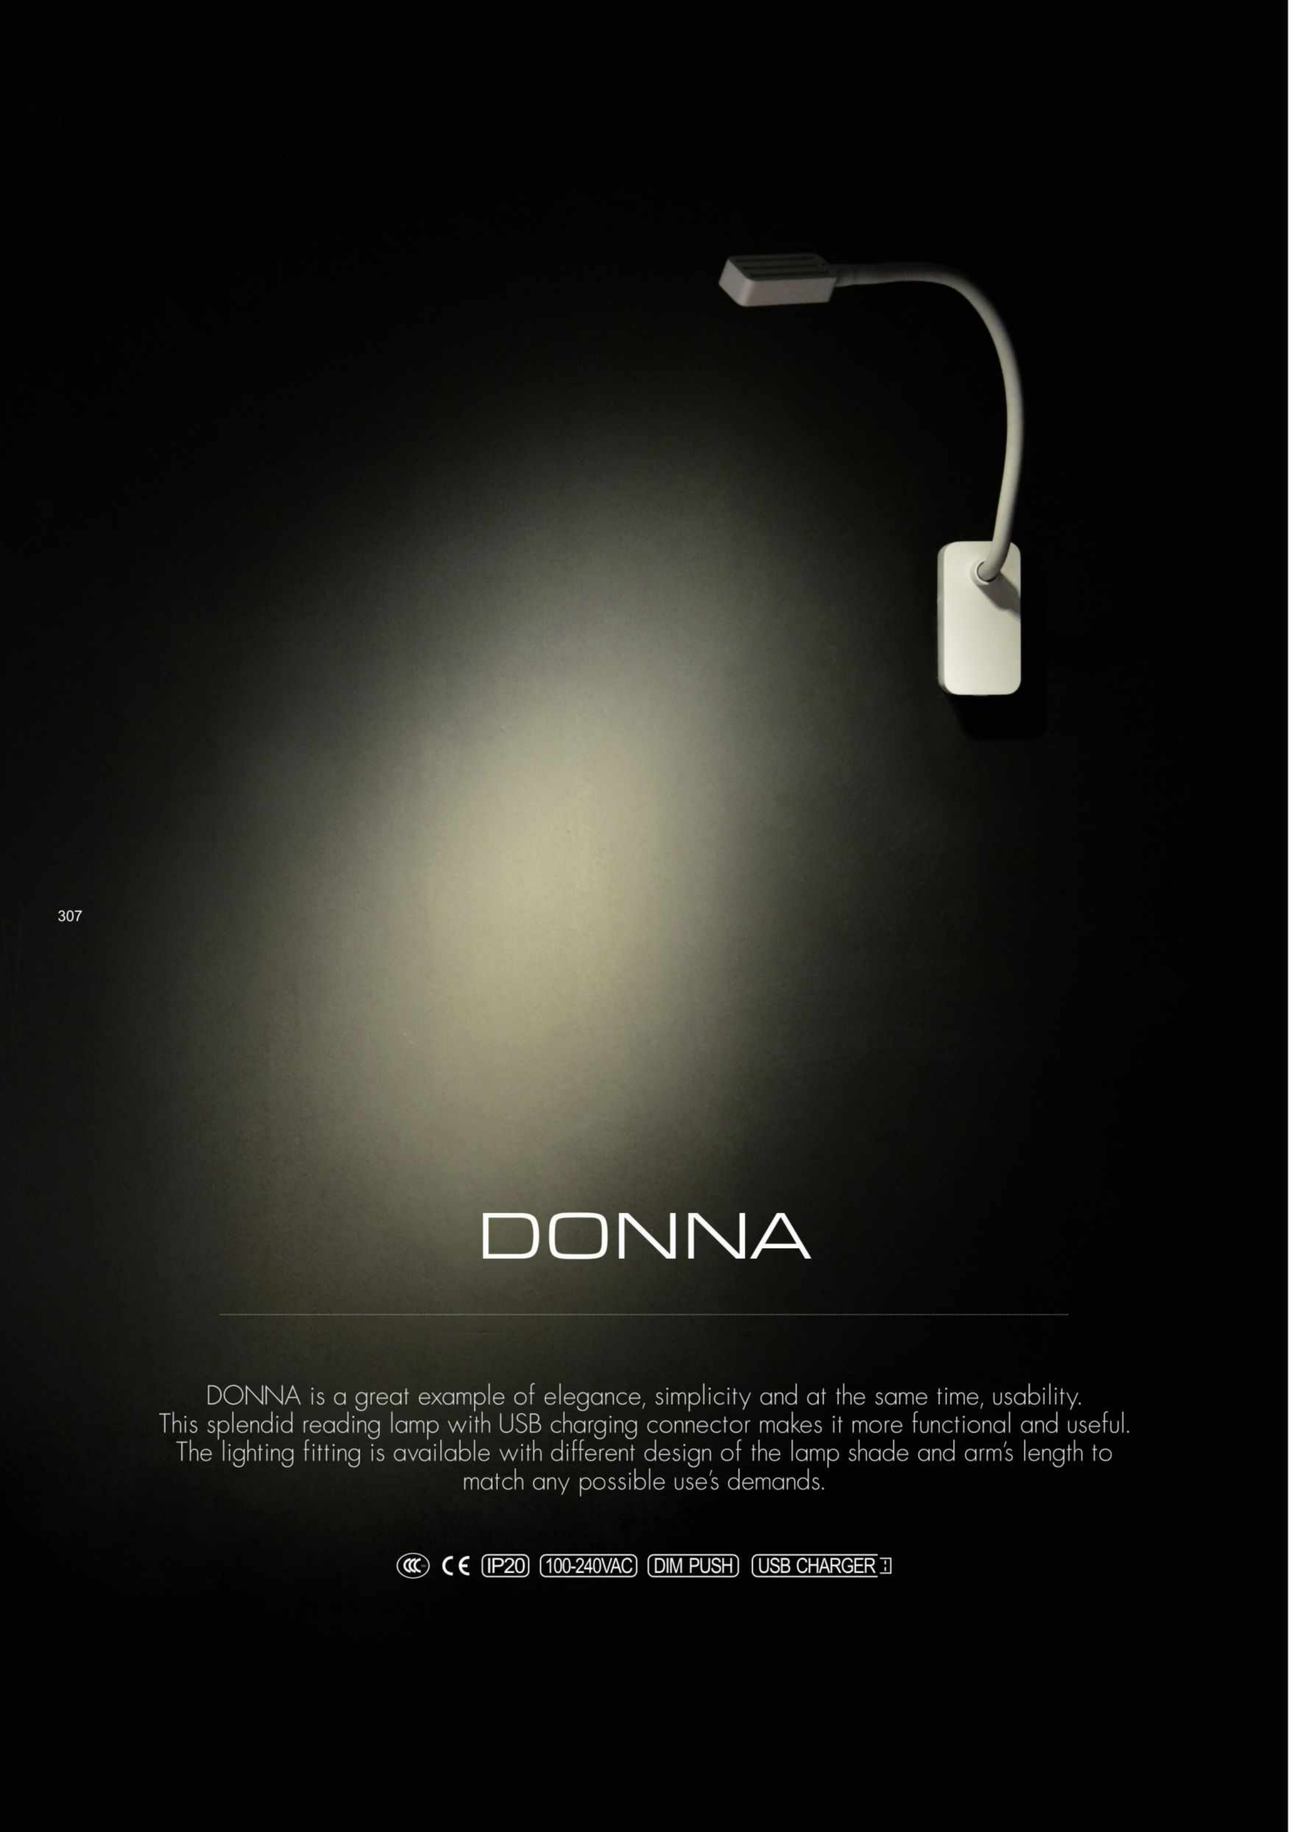

DONNA

DONNA is a great example of elegance, simplicity and at the same time, usability.
This splendid reading lamp with USB charging connector makes it more functional and useful.
The lighting fitting is available with different design of the lamp shade and arm's length to match any possible use's demands.

CE IP20 100-240VAC DIM PUSH USB CHARGER

1

IOS/ANDROID CHARGER

DONNA 1

LED POWER:2.2W
CRI: 90
SYSTEM POWER:3.5W
OUTPUT: 136Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 100*50*460mm
HOLE SIZE: /

RECOMMEND

DIM PUSH
428417DT

428417DT

ANGLE 15°



2.2W 15° 3000K



2.2W 15° 3000K



COLOR FINISHINGS:

PAW PAB

3

IOS/ANDROID CHARGER

DONNA 3

LED POWER:3.2W
CRI: 90
SYSTEM POWER:3.7W
OUTPUT: 236Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 100*50*501mm
HOLE SIZE: /

RECOMMEND

DIM PUSH
428317DT



ANGLE 22°



3.2W 22° 3000K



3.2W 22° 3000K



COLOR FINISHINGS:

PAW PAB

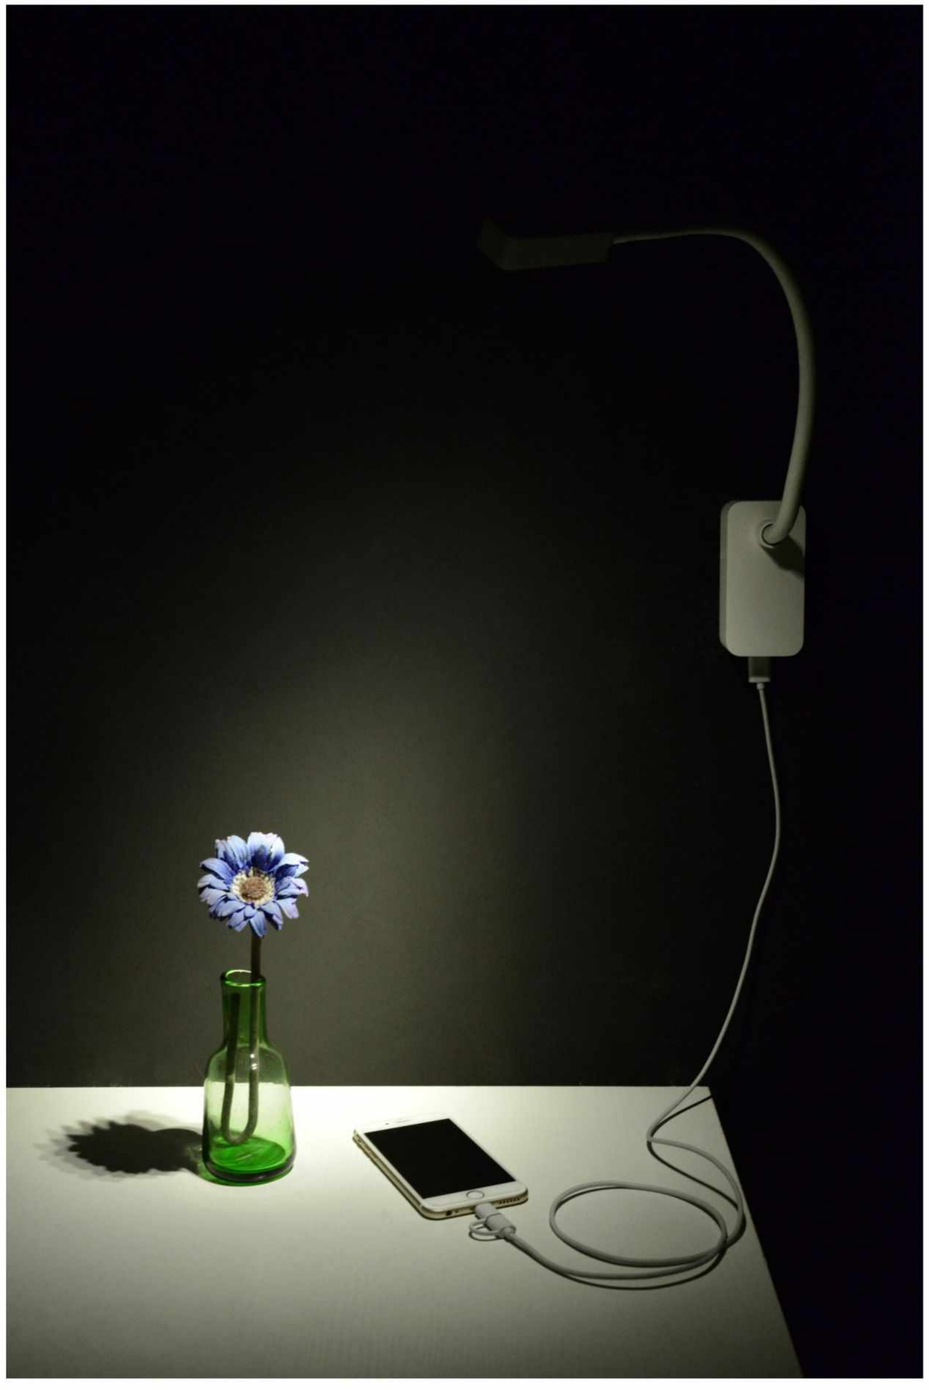

LEGGO

LEGGO is a new design concept of bedside lighting.
LEGGO is a nice example of elegance, flexibility and functionality.
Different selection of lamp shapes is specially created to meet any possible design requirement.
Each model has DIM function.

IP20 100-240VAC DIM TOUCH

2

LEGGO 2

LED POWER:2.2W
CRI: 80
SYSTEM POWER:3.5W
OUTPUT: 40Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 90*490*28mm
HOLE SIZE: /

416417DT

ANGLE L



2.2W L 3000K



2.2W L 3000K



RECOMMEND

DIM TOUCH
416417DT

COLOR FINISHINGS:

PAB PAW

IN IO

IN ROUND

OTLY

Simple minimal design of recessed bedside lighting.
OTLY is available in round and square shape.
Square version could be equipped with switch button.

CE IP20 100/220-240VAC

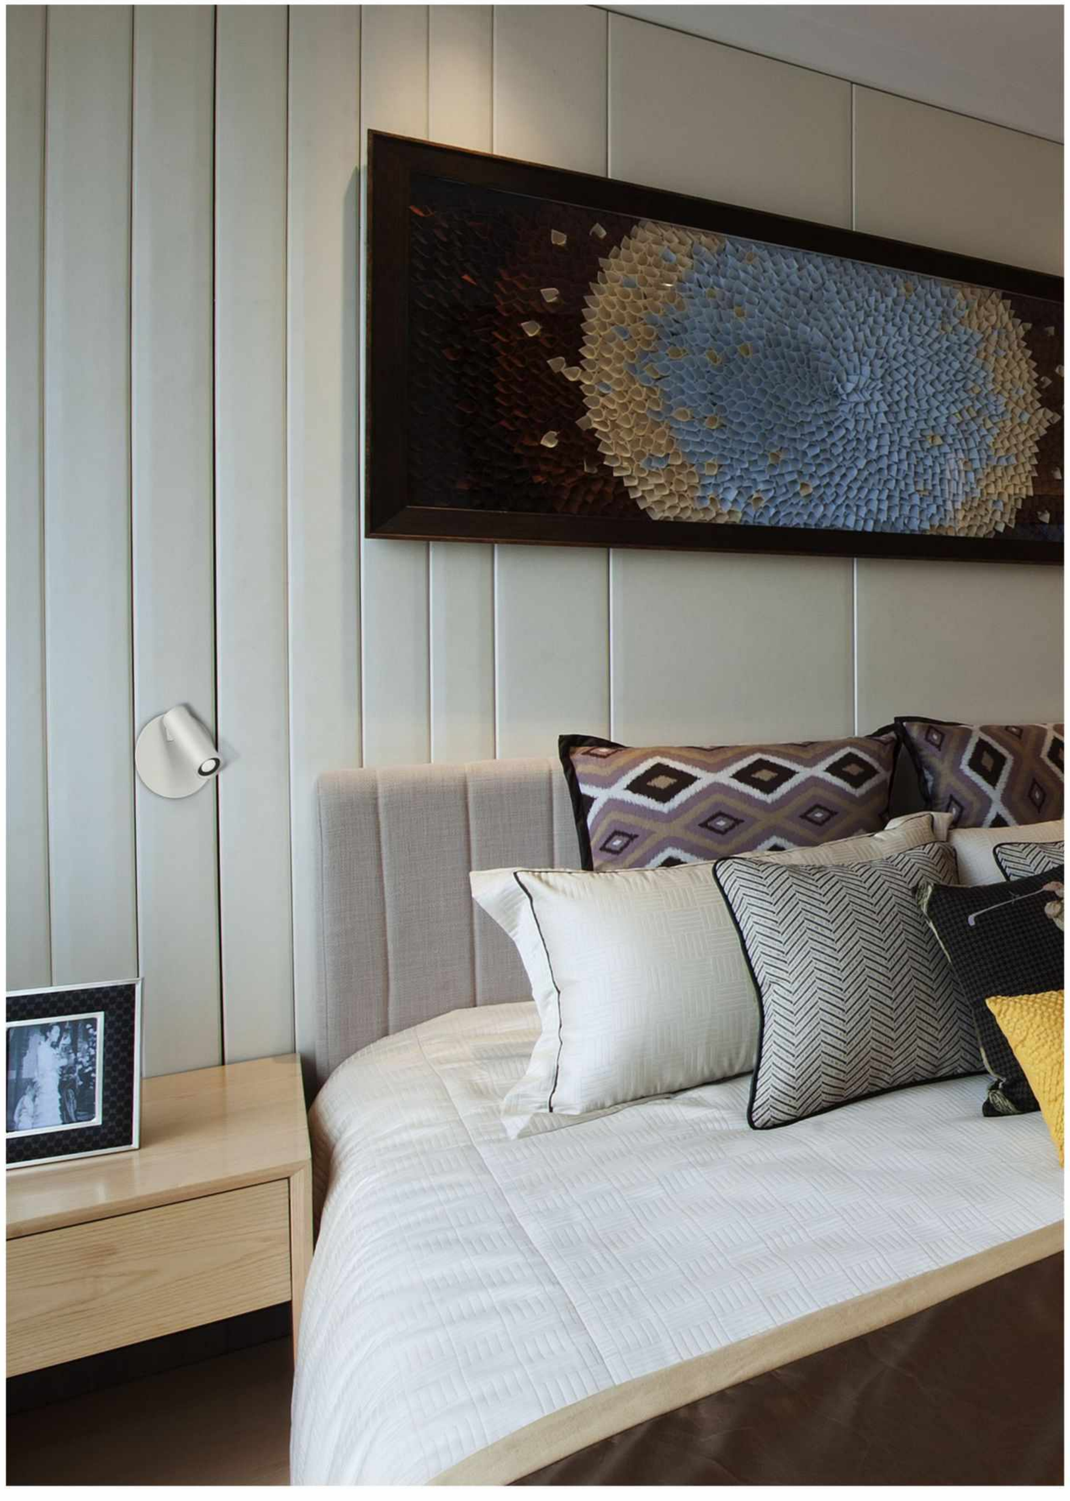

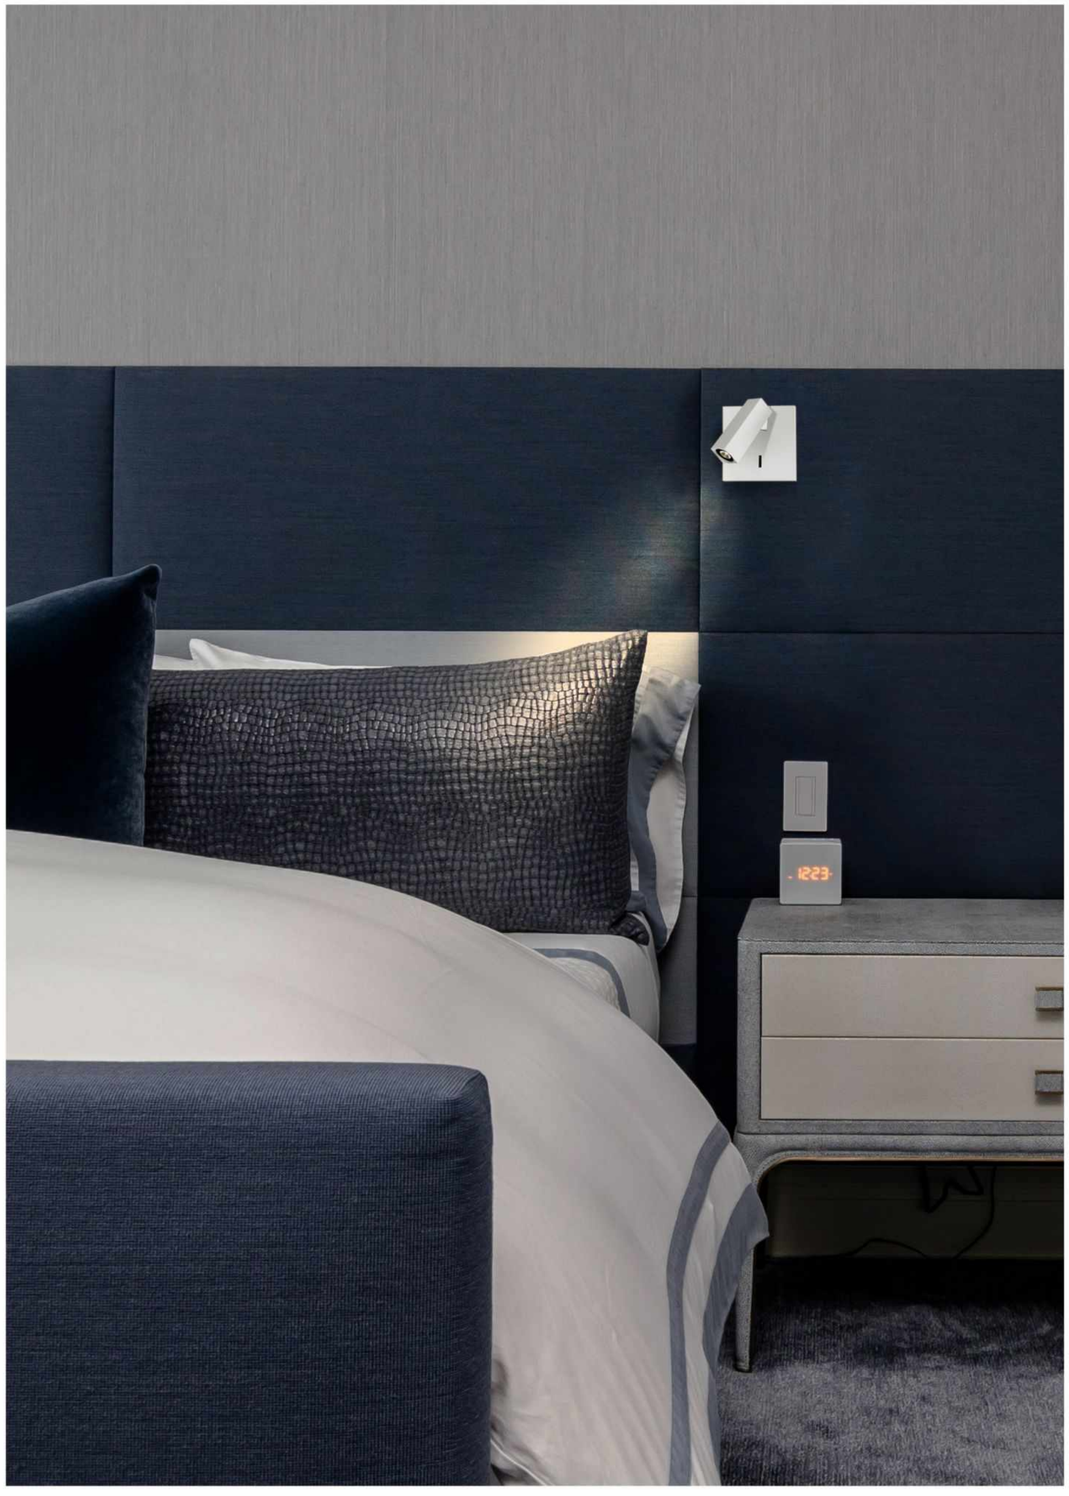

OTLY IN ROUND /IO

LED POWER:2.2W
CRI: 80
SYSTEM POWER:4.5W
OUTPUT: 144Lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø90*82mm/91*91*90mm
HOLE SIZE: Ø75mm/95*95mm

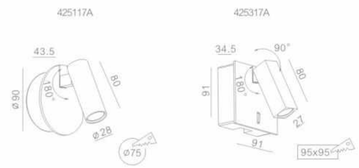

ANGLE 21°



2.2W 21° 3000K



2.2W 21° 3000K



ROSA

ROSA is a new concept of bed side lamp.
Light fixture with high performance LED light source,composed
by a head with touch DIM and flexible arm.
Thanks to its miniature size and elegant shape, ROSA can match
any design concept in the room providing stylish and flexible lighting solution.
ROSA is the best choice for both residential
and hotel applications. Now it is
available with both round and square base shapes.

IP20 100-240VAC DIM PUSH

IN

ROSA IN

LED POWER:2.2W
CRI: 90
SYSTEM POWER:3.7W
OUTPUT: 160Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 78*78*502mm
HOLE SIZE: 71*71mm

428117DT



ANGLE 24°



2.2W 24° 3000K



2.2W 24° 3000K



RECOMMEND

DIM PUSH
428117DT

COLOR FINISHINGS:

PAB PAW

TATOU

New concept of bedside lighting
TATOU is flexible and functional friendly collection.
Thanks to its structure, TATOU can be adjusted up to 90°and tilt up to 355 °,
making it easy to focus the light beam however needed.
TATOU BOX version have two options for choice: with and without switch button.

CE IP20 100/220-240VAC DIM TRIAC USB CHARGER

USB

IOS/ANDROID CHARGER

TATOU USB

LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 4W
OUTPUT:115 Lm/3000K
INPUT: 100-240VAC
DIMENSION: 102*51*202mm
HOLE SIZE: /

433517DT

ANGLE 15°



2.2W 15° 3000K



2.2W 15° 3000K



COLOR FINISHINGS:

PAW PAB

BOX

BOX IO

TATOU BOX / BOX IO

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 413Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 138*165*35.6mm
153*165*35.6mm
HOLE SIZE: /

423011A



423111A

ANGLE 15°



6W 15° 3000K



6W 15° 3000K



COLOR FINISHINGS:

PAB PAW

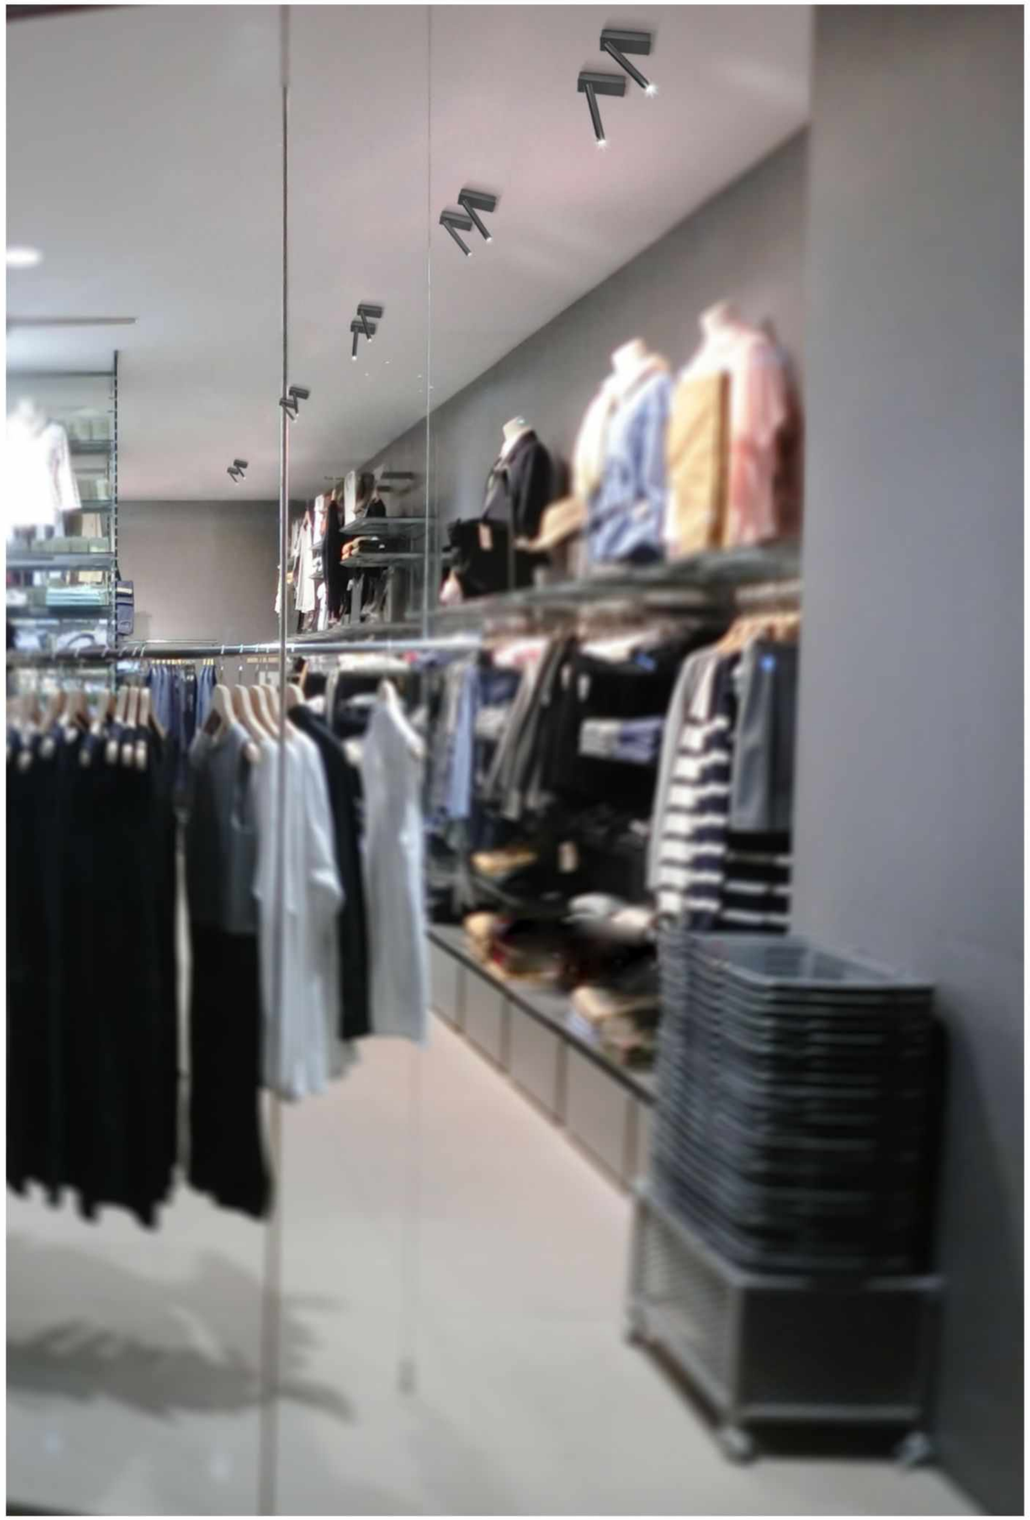

WALL INSTRUCTIONS

CARD IN 1
326

CARD IN 2
326

CARD SQ
326



DANAS RO 1
332

DANAS SQ 1
332



DANAS RO 2
332

DANAS SQ 2
332

DANAS RO 3
332



DANAS SQ 3
332

DANAS RO 4
332

DANAS SQ 4
332

DANAS RO 5
332

DANAS SQ 5
332

KEATON MINI S
334

KEATON MINI L
334



SLIDE AISI316
337

SLIDE IP SQUARE
338



SLIDE IP RECTANGULAR
339

SLIDE
340

SNOW
343

TONE S RO RGB AISI316
348

TONE S LI RGB AISI316
348

TONE S RO RGB
348

TONE S LI RGB
348



TONE IN
349



TONE IN AISI316
349

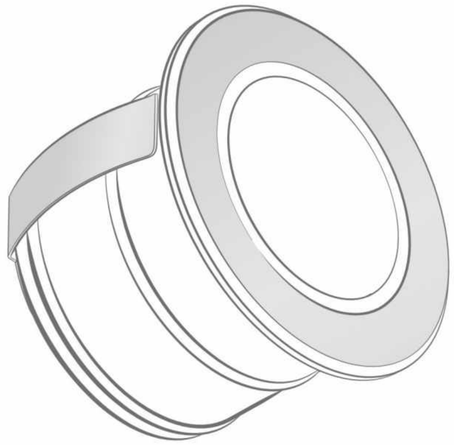

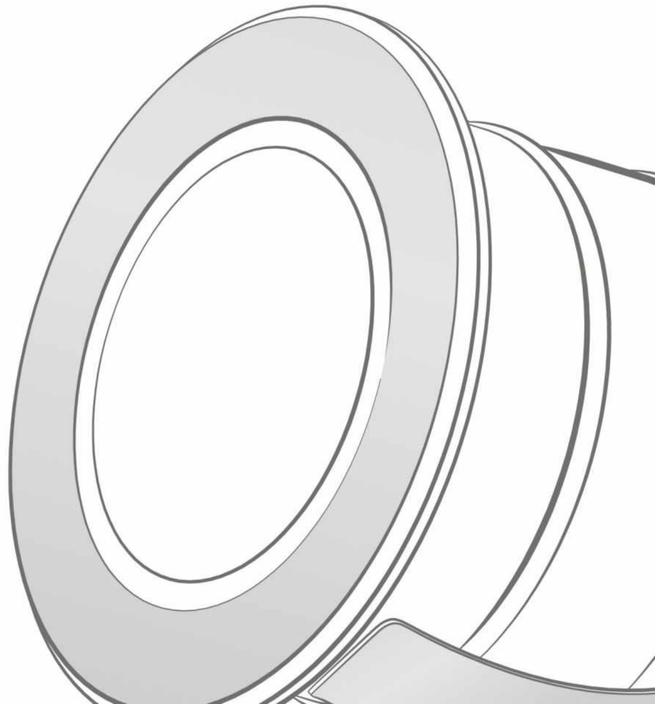

PERFORM YOUR LIGHT

CARD

CARD is the best choice for guidance light in hallways and staircase for indoor application.
Narrow beam angle produces triangular shaped lighting effect on the floor.
CARD series is presented by 3 different dimensions that could meet all possible lighting requirements. In addition to white amber color,
CARD is available in red, green and blue colors.
CARD can be installed both in plywood and cement walls.

IP20 220-240VAC

IN 2

SQ

IN 1

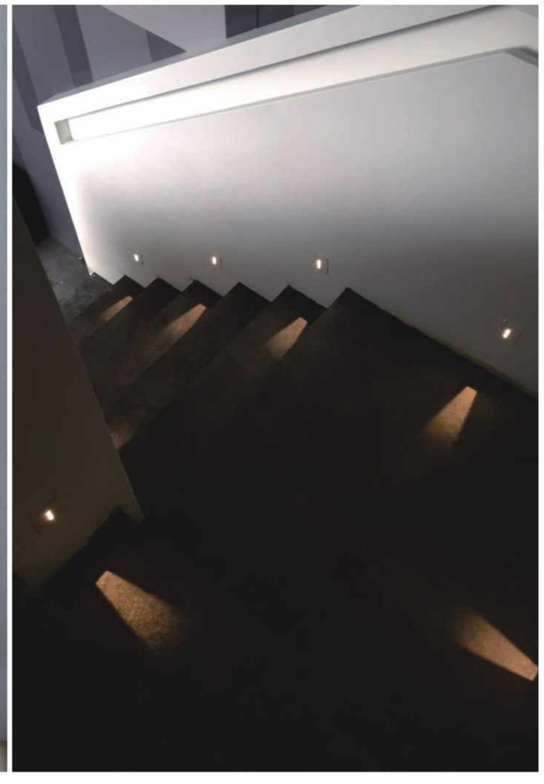

CARD IN 1

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 80Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 70*35*38mm
HOLE SIZE: 150*150*50.5mm

P

419117A



CARD IN 2

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 75Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 175*35*50mm
HOLE SIZE: 130*250*52.5mm

P

419217A



CARD SQ

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 69Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 70*70*40mm
HOLE SIZE: 150*150*49mm

P

414917A



DANAS

Thanks to wide variety of the outer frame,
DANAS can meet any design requirements creating different lighting patterns on the floor.
IP 65 rate makes it possible to use DANAS for both interior and exterior projects.
Both round and square frames are available.
Plastic box is provided specially for installation into cement wall.

IP65 220-240VAC

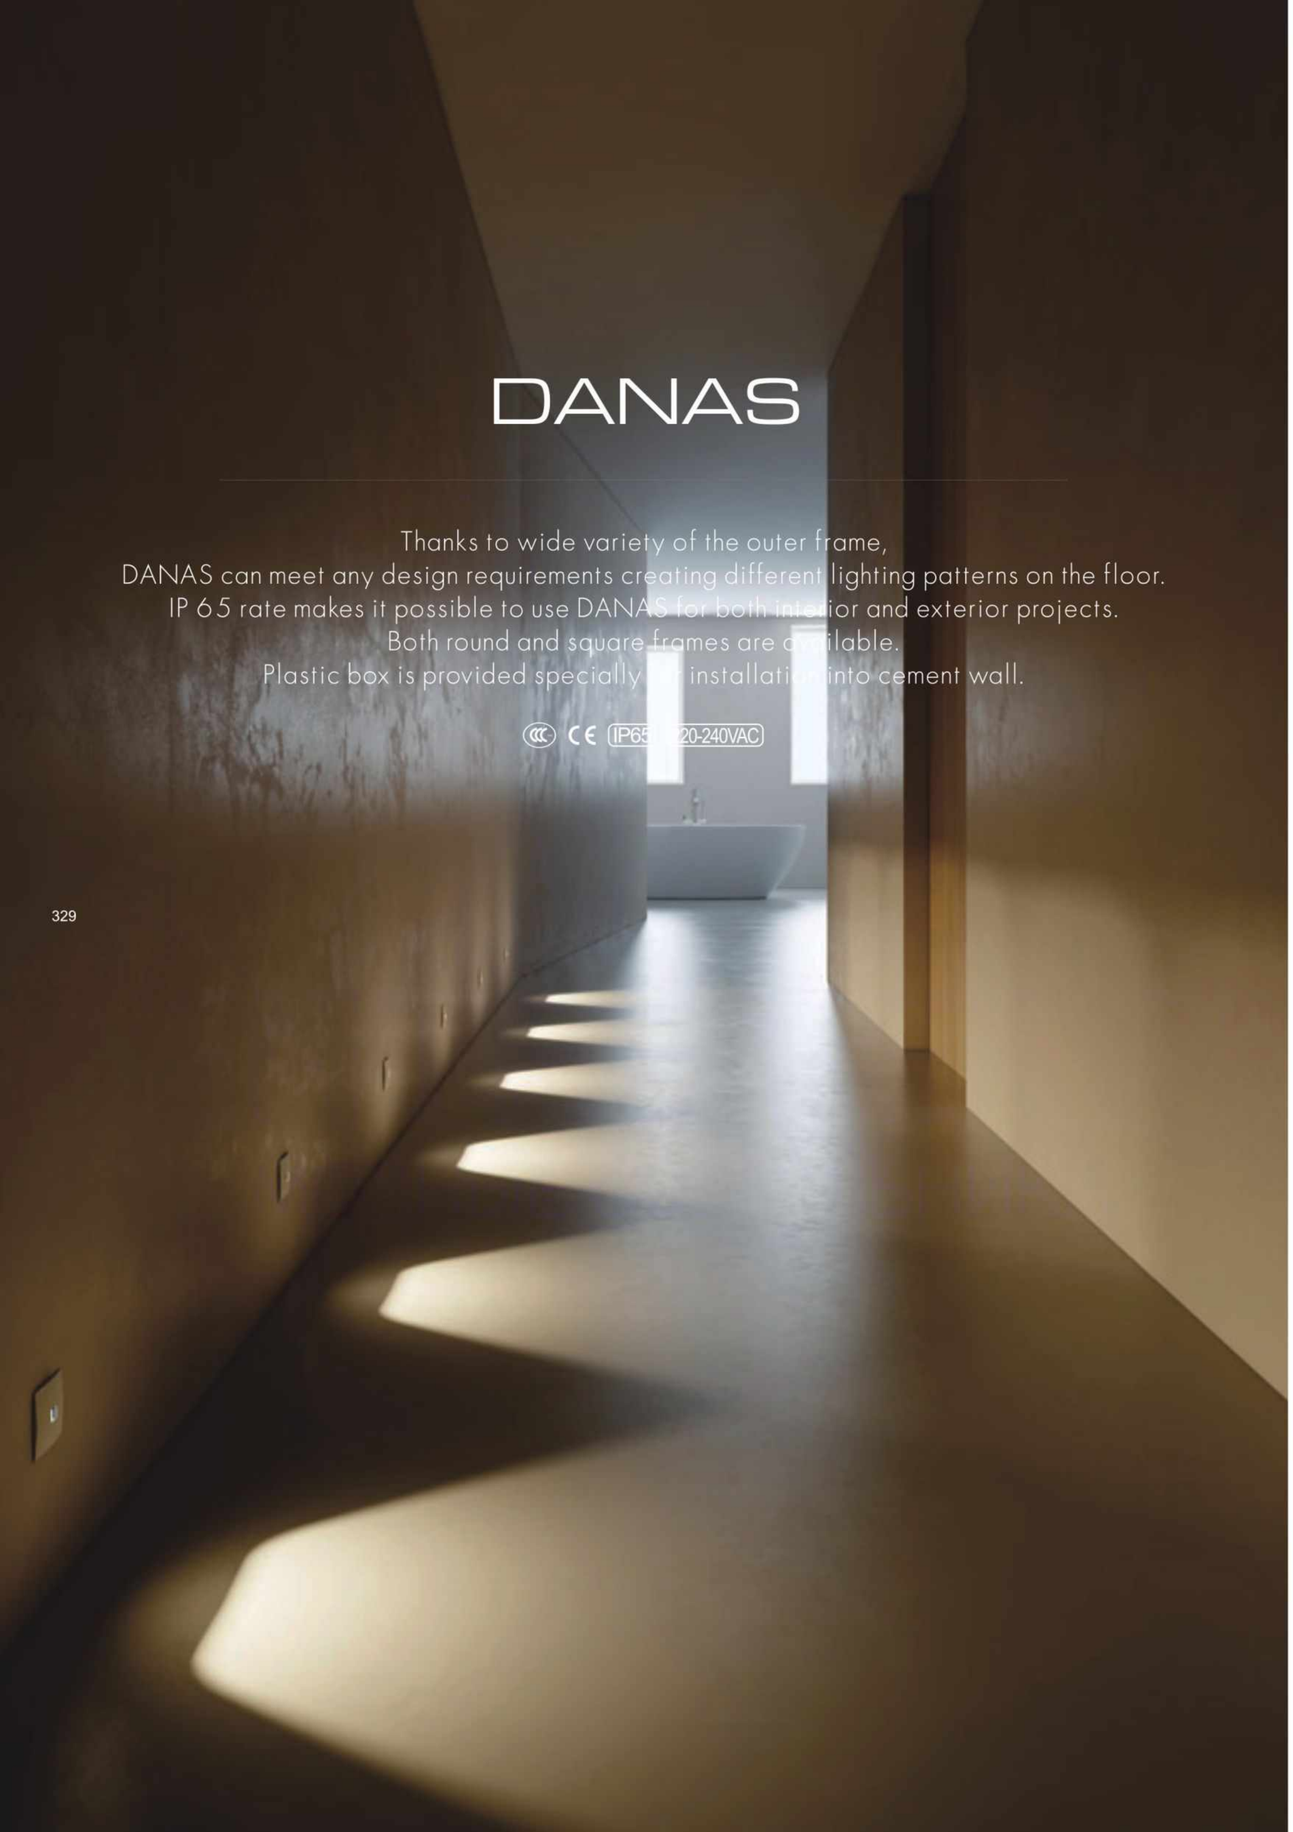

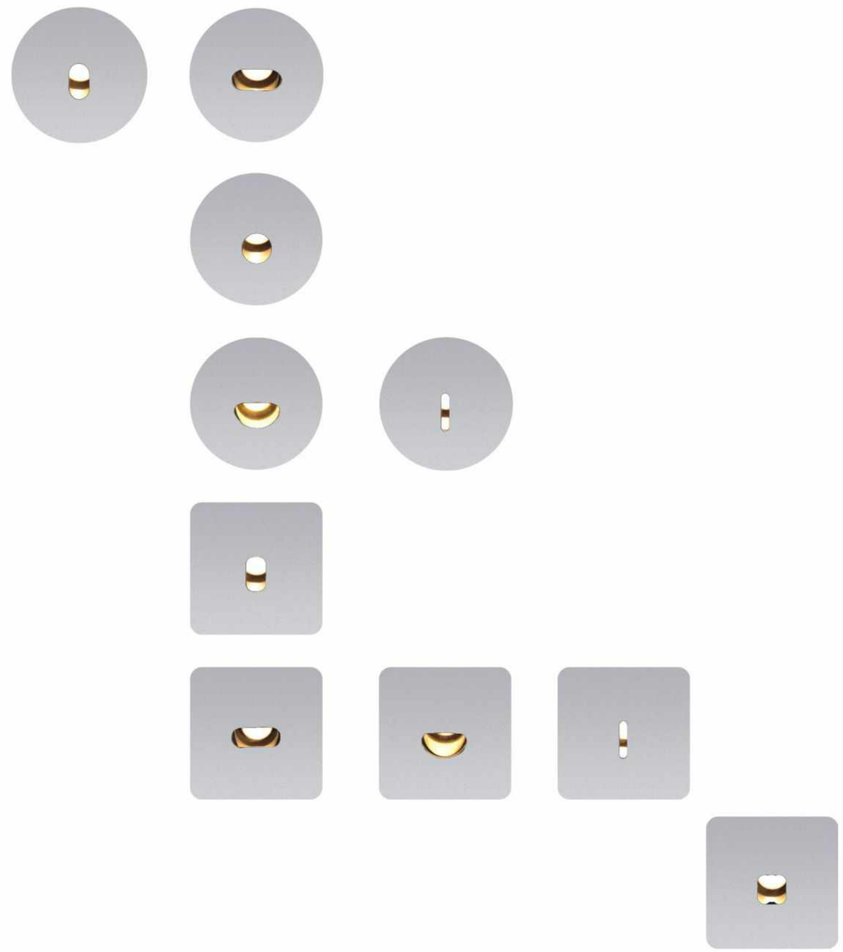

COLOR FINISHINGS:

PAW PAB PCS

DANAS

LED POWER: 2.2W
LED OUTPUT: 168Lm/3000K
SYSTEM POWER: 4.0W
SYSTEM OUTPUT: 27Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø55*42mm/55*55*42mm
HOLE SIZE: Ø45mm/Ø70mm

ANGLE C



2.2W C 3000K



2.2W C 3000K



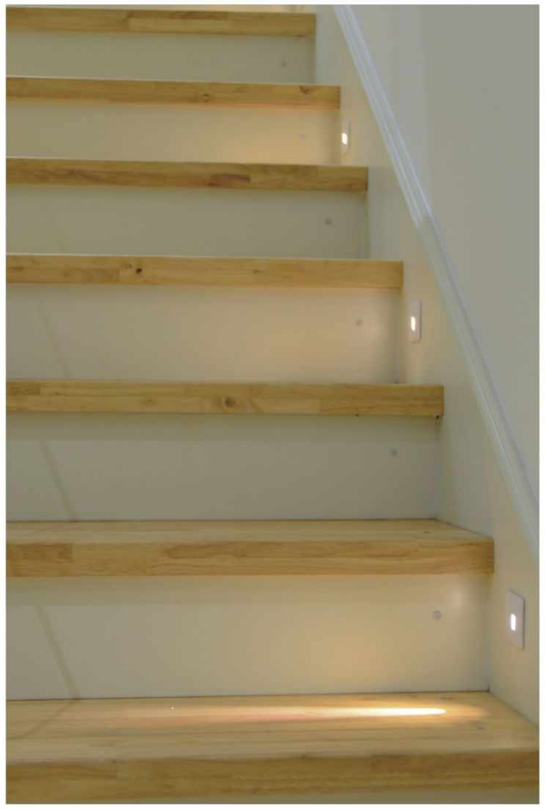

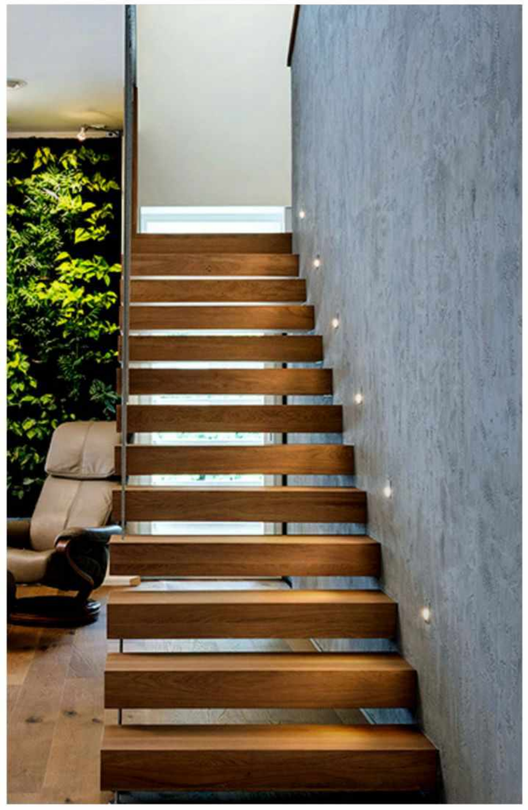

RO 1 408411A
SQ 1 408911A

RO 2 408511A
SQ 2 409011A

RO 3 408611A
SQ 3 409111A

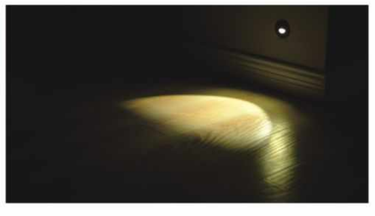

RO 4 408711A
SQ 4 409211A

RO 5 408811A
SQ 5 409311A

KEATON

KEATON is a popular wall recessed fixture for guidance light in hallways.
Special light beam produces splendidlight effect on the floor
creating visual prolongation of the space.
Available in 3 sizes.
KEATON is perfect for usage in hotels, restaurants and other public areas.

CCC CE IP20 100-240VAC

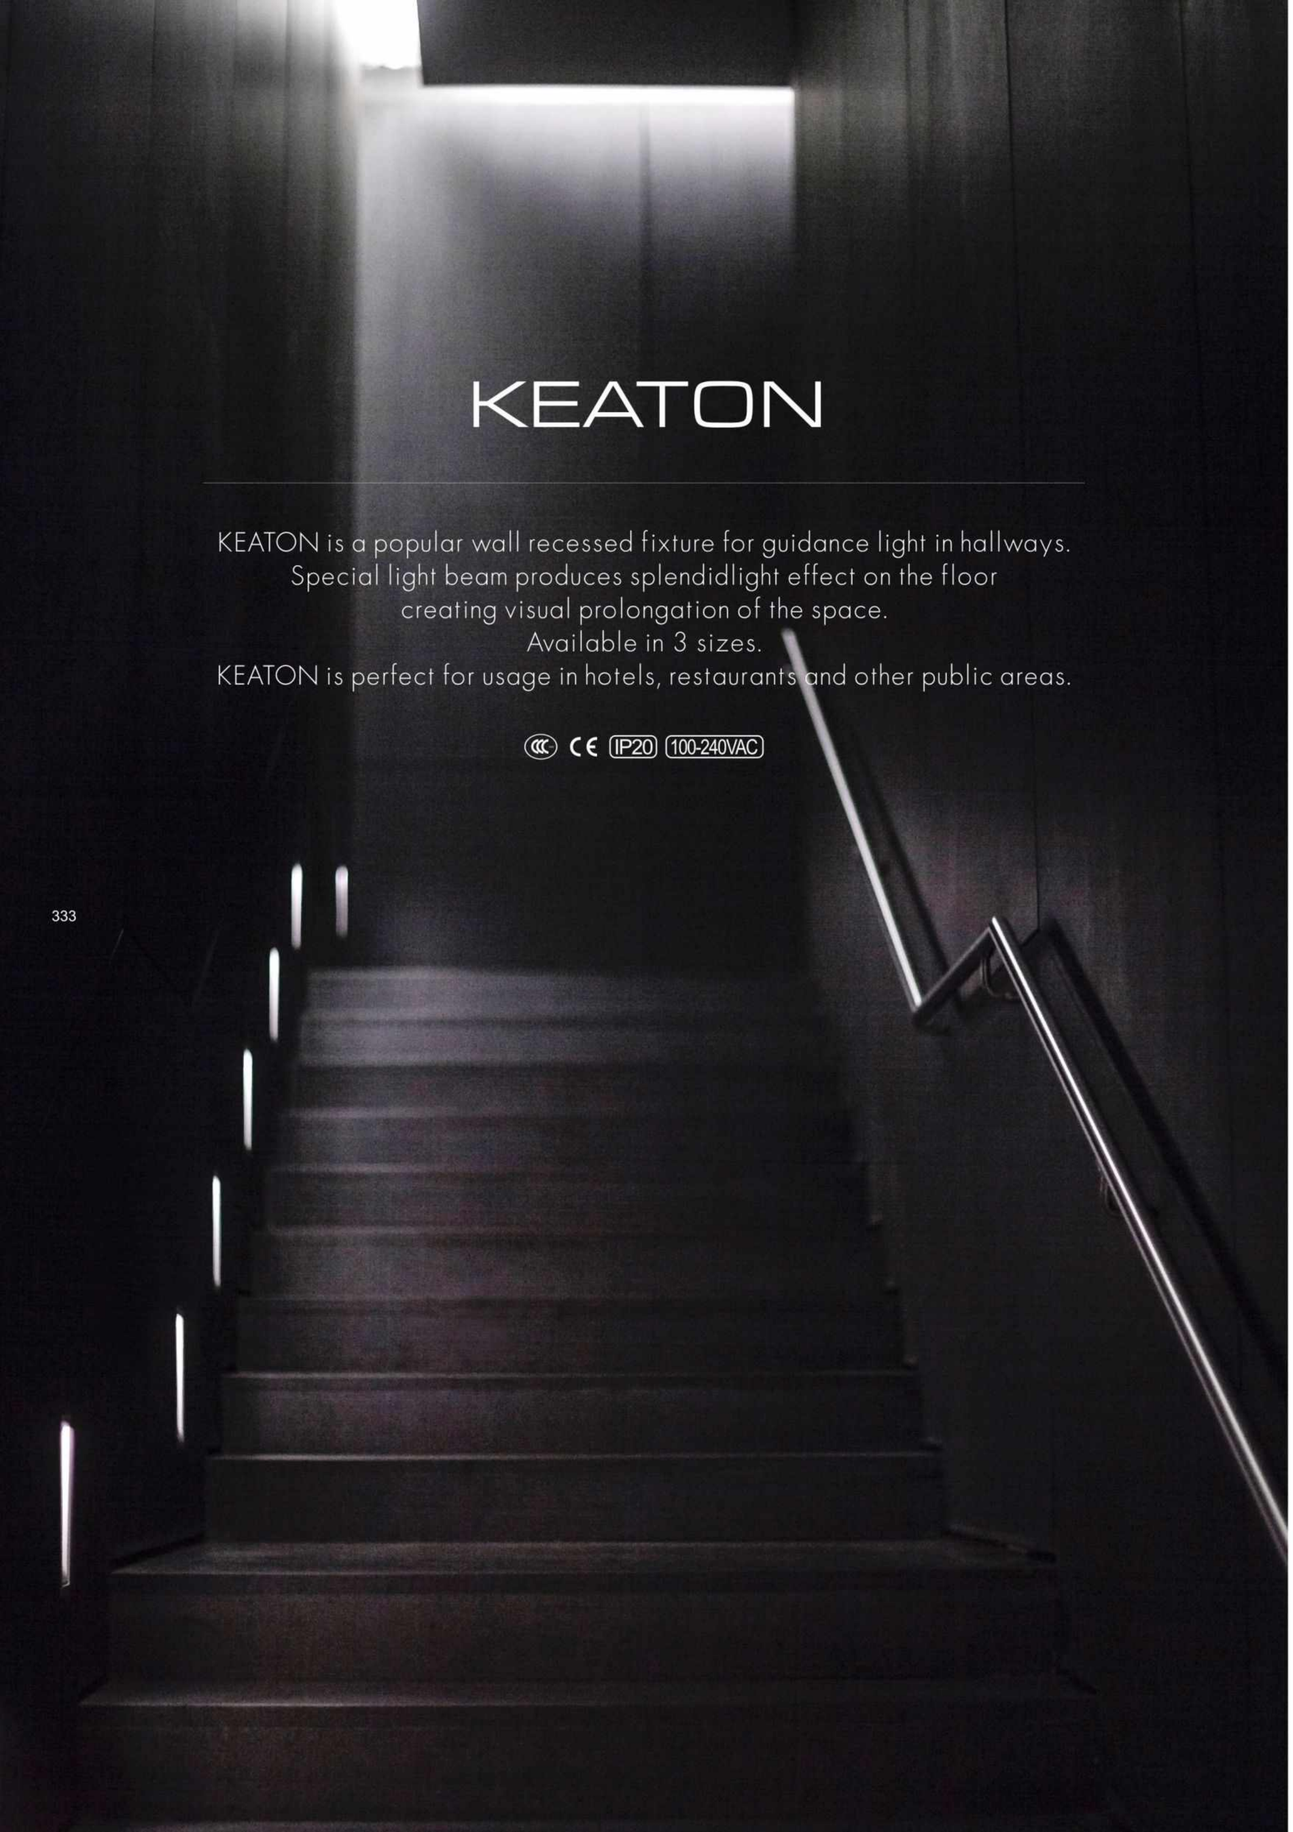

MINI S

MINI L

KEATON MINI S

LED POWER: 1W
LED OUTPUT: 102Lm/3000K
SYSTEM POWER: 1.9W
SYSTEM OUTPUT: 17Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 69.5*66*31.3mm
HOLE SIZE: 40*73mm

433717



KEATON MINI L

LED POWER: 1W
LED OUTPUT: 102Lm/3000K
SYSTEM POWER: 1.9W
SYSTEM OUTPUT: 17Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 127.5*66*31.3mm
HOLE SIZE: 40*131mm

433917



SLIDE

As a wall recessed luminaire,
SLIDE is perfect as a guidance light.
Be it in a corridor or as a safety light for the steps of your stairs at night,
SLIDE does the trick. SLIDE is available with IP20 and IP65 rate.
For special requirements stainless steel version
is also available.

CE IP20 IP65 100/220-240VAC

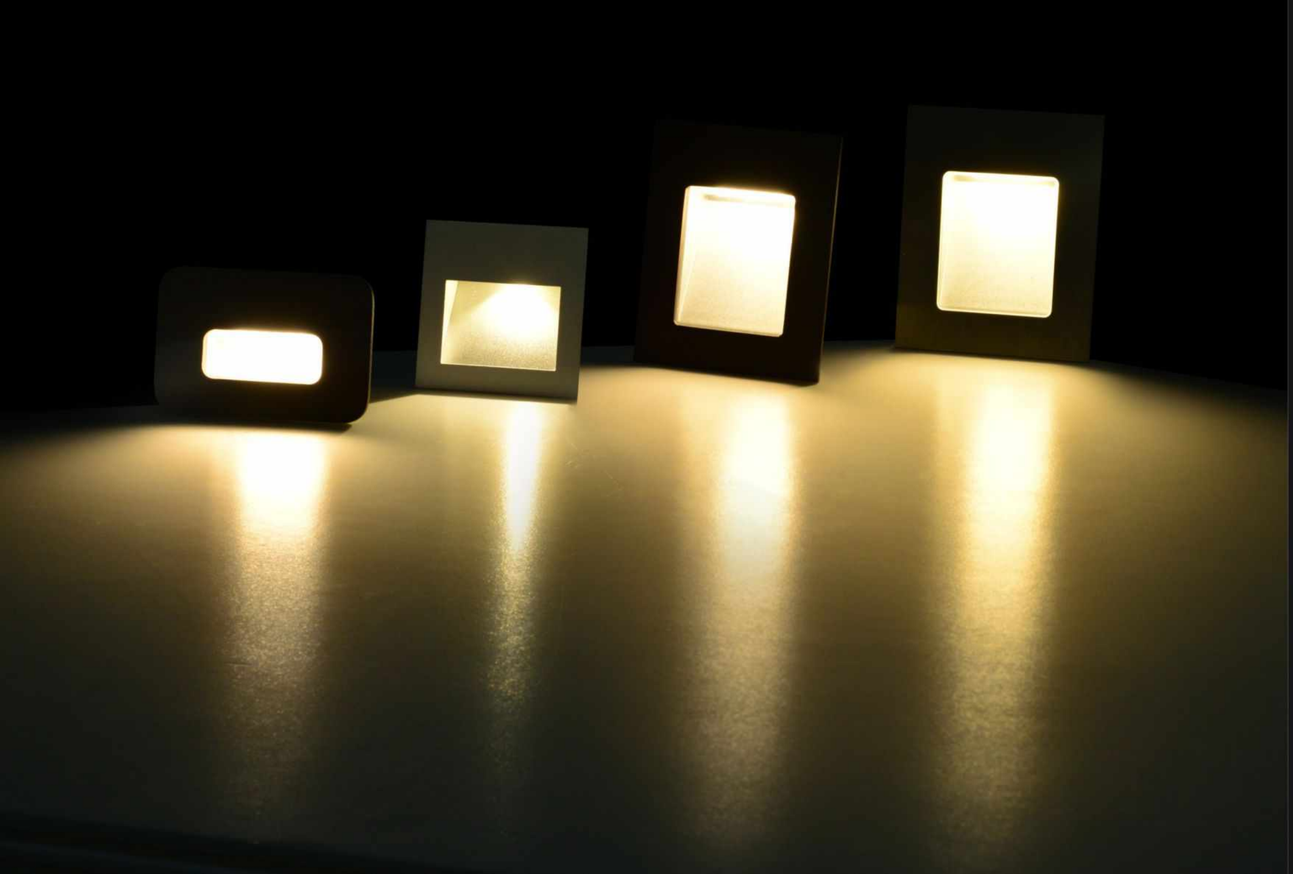

AISI316

IP SQUARE

SLIDE IP AISI316 IP65

LED POWER:3W
CRI: 80
SYSTEM POWER:5.1W
OUTPUT:215Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 85*105*43mm
HOLE SIZE: 75*95mm

413914A



ANGLE P



3W P 3000K



3W P 3000K



SLIDE IP SQUARE IP65

LED POWER:3W
CRI: 80
SYSTEM POWER:5.1W
OUTPUT:215Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 85*105*43mm
HOLE SIZE: 75*95mm

411214A



ANGLE P



3W P 3000K



3W P 3000K



IP RECTANGULAR

SLIDE IP RECTANGULAR IP65

LED POWER:3W
CRI:80
SYSTEM POWER:5.1W
OUTPUT: 171Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 90*60*48mm
HOLE SIZE: 45*75mm

411314A



ANGLE P



3W P 3000K



3W P 3000K



SLIDE

SLIDE IP20

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 5.1W
SYSTEM OUTPUT: 90Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 70*70*40mm
HOLE SIZE: 65*65mm/95*95mm

415017A

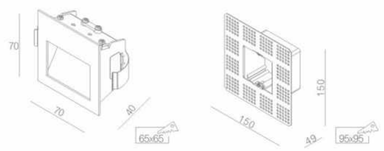

ANGLE P



2.2W P 3000K



2.2W P 3000K



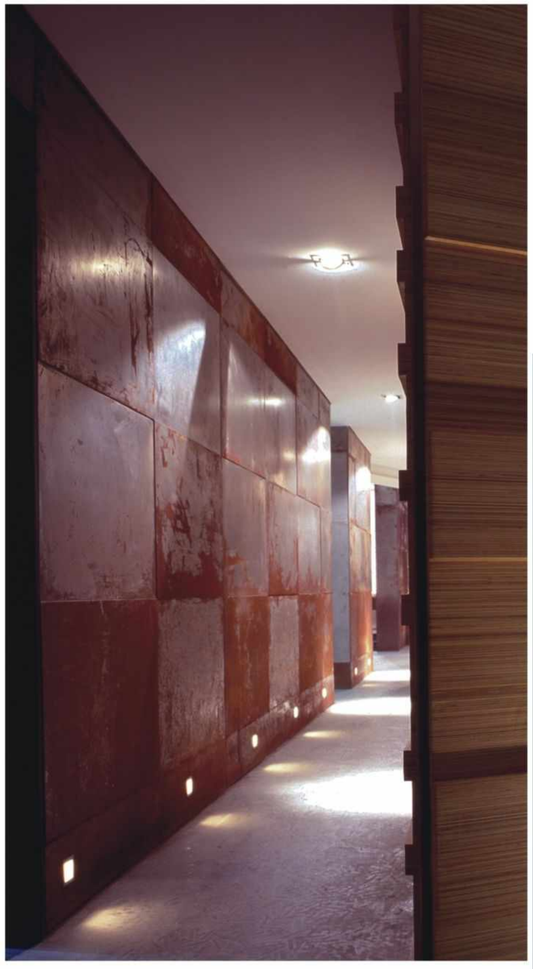

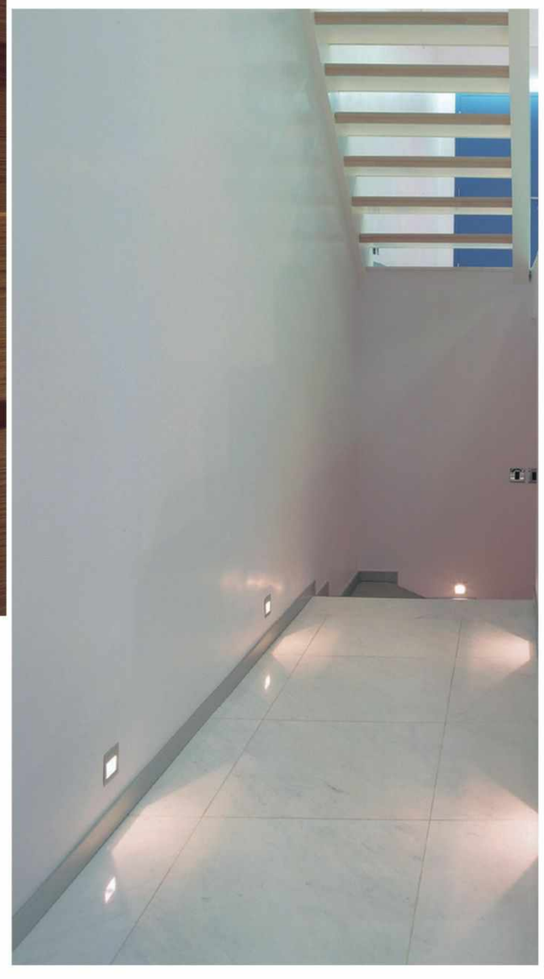

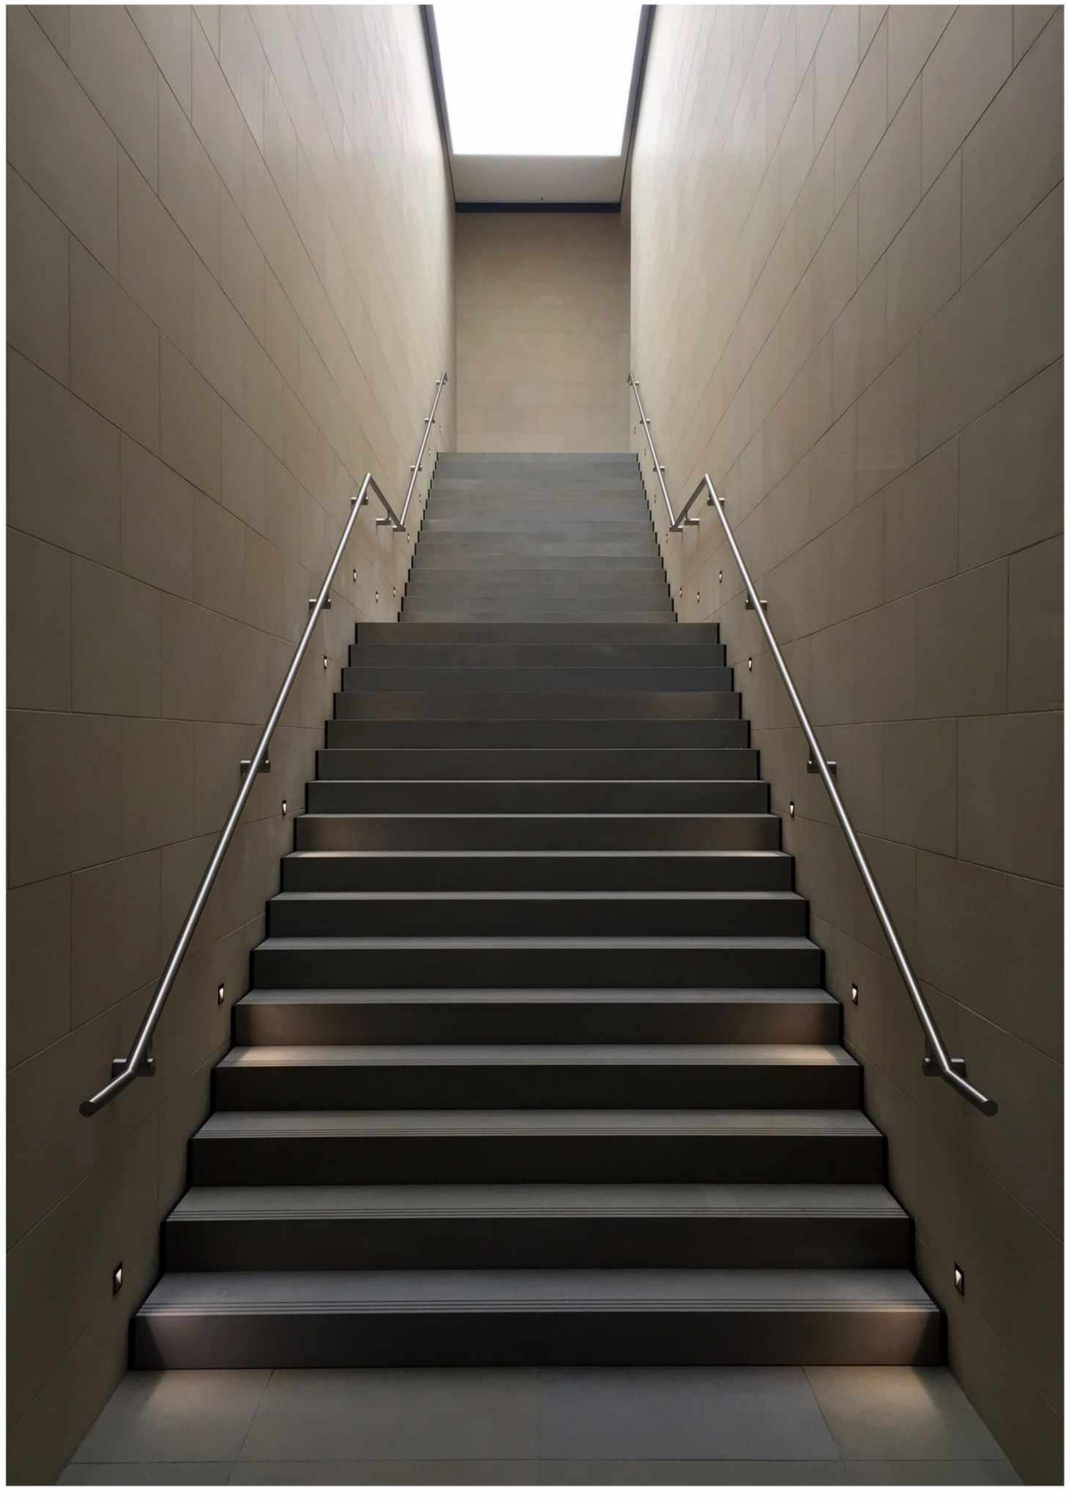

SNOW

This miniature fixture,thanks to its special structure,
makes the light going from a deep shelter, creating unique lighting patterns on the floor.

Due to its slim body,
SNOW can be easily installed in the places where the space is limited.

CE IP54 220-240VAC

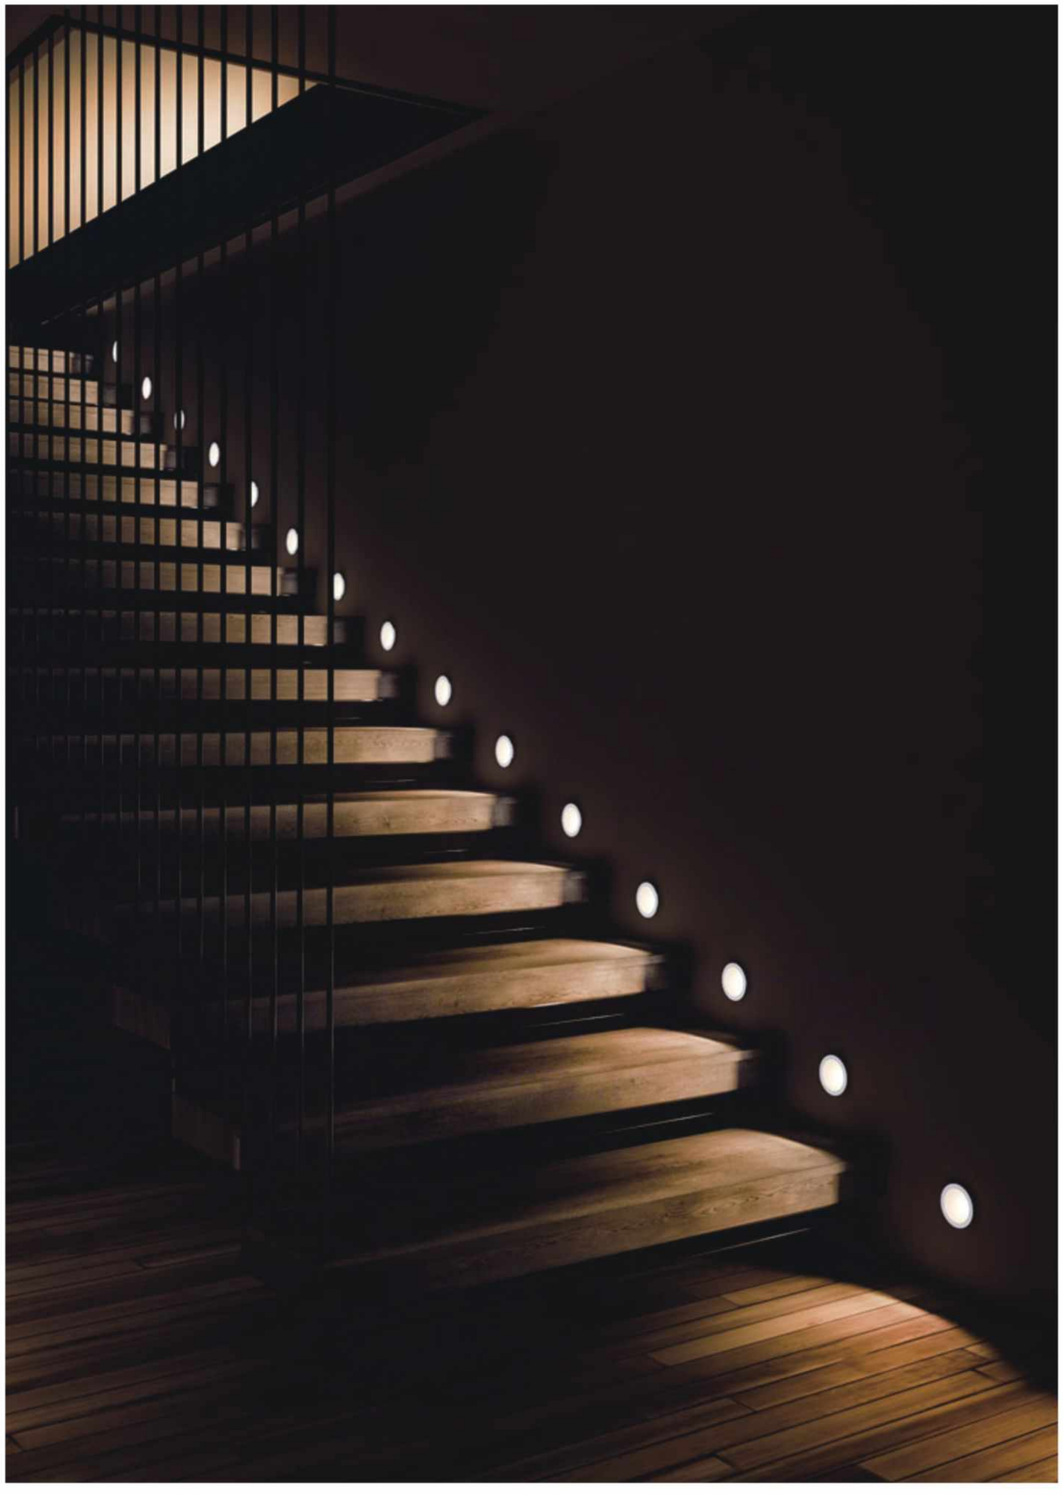

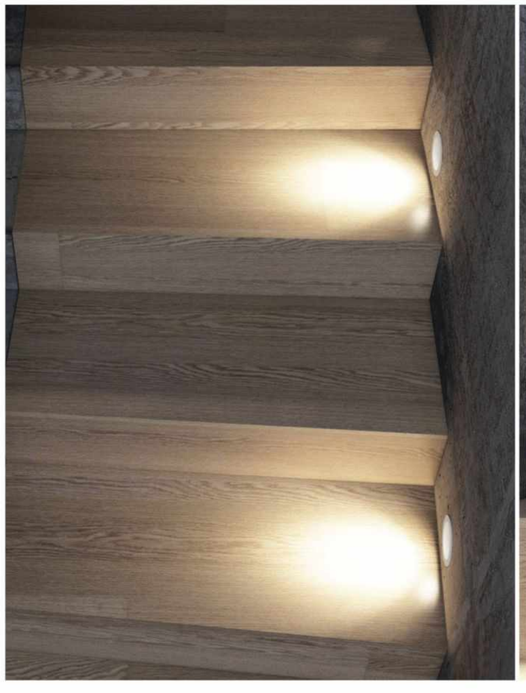

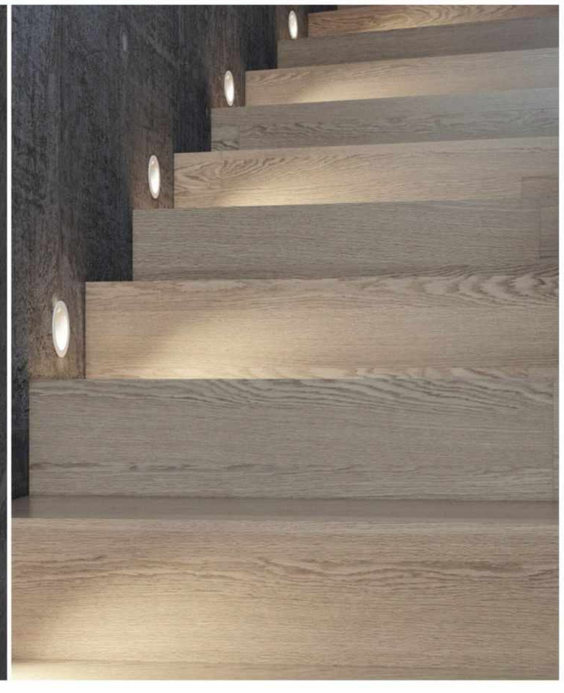

SNOW

LED POWER:2.2W
CRI: 80
SYSTEM POWER:3.8W
OUTPUT: 151Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø80*30mm
HOLE SIZE: Ø70mm



ANGLE C

2.2W C 3000K



2.2W C 3000K



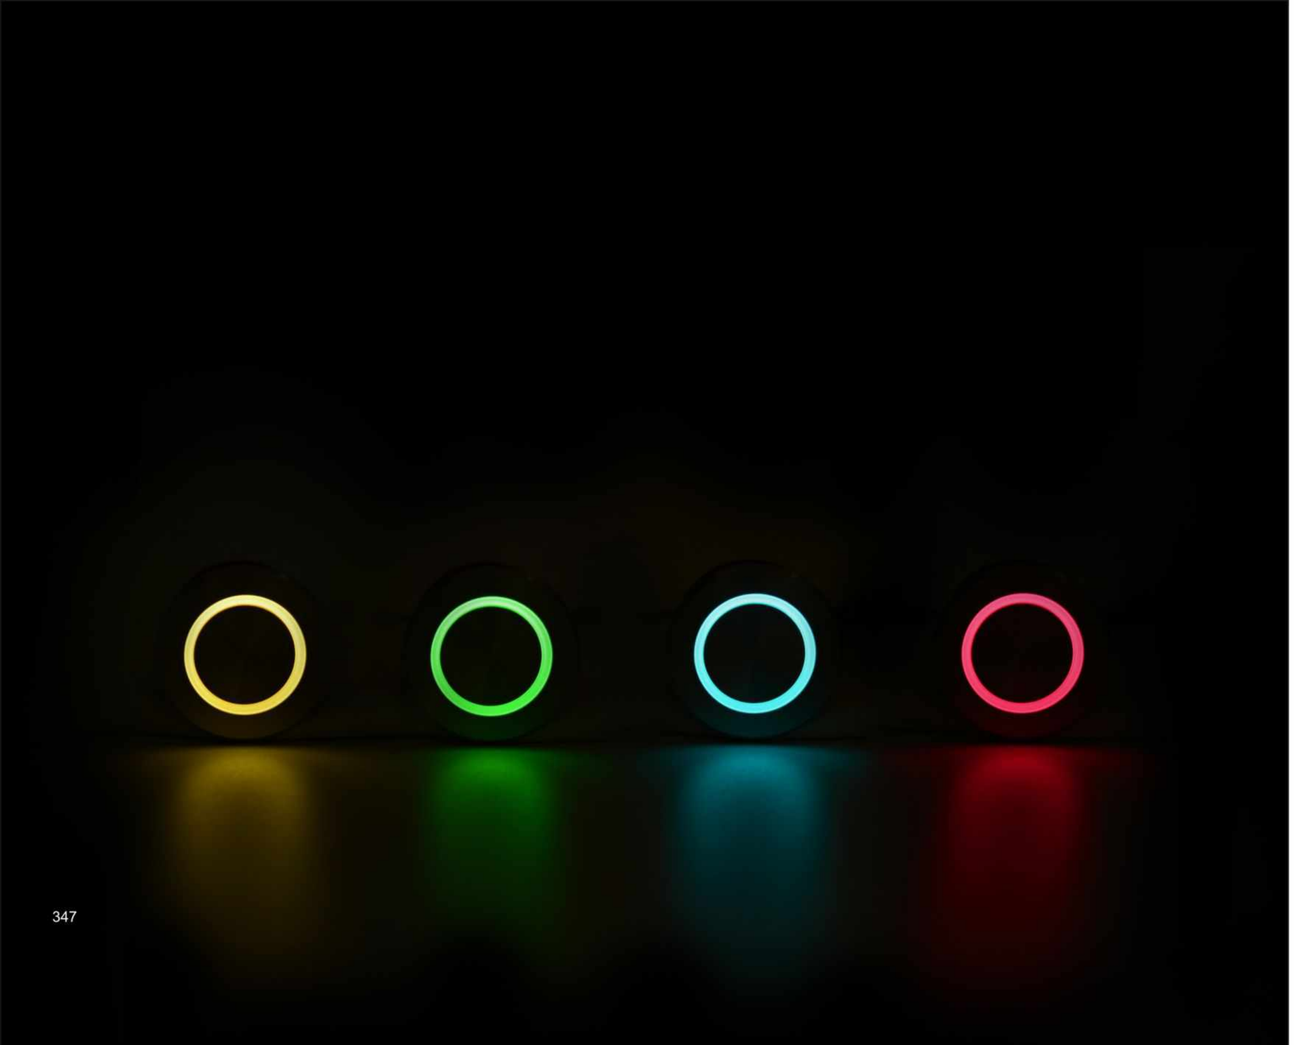

TONE

This splendid wall recessed fixture
has become the best guidance light for staircase.
Round shaped frame with elegant ring makes TONE unique and extremely popular.
Aluminum and stainless steel versions are available,
both with IP65 rate.

IP65 100-240VAC 24VAC

S LI RGB AISI316

S RO RGB AISI316

S LI RGB

S RO RGB

COLOR FINISHINGS:

SSS

PAW

PAB



S RO AISI316

S LI AISI316

S RO

S LI

COLOR FINISHINGS:

SSS PAW PAB





IN AISI316



IN

COLOR FINISHINGS:

SSS PAW PAB PCS

TONE S LI RGB AISI316 DC / S LI RGB DC S RO RGB AISI316 DC / S RO RGB DC

LED POWER: 0.7W
LED OUTPUT:/
SYSTEM POWER: 0.7W
SYSTEM OUTPUT:/
INPUT: 24VDC,50/60Hz
CRI: /
DIMENSION: Ø37*29mm
HOLE SIZE: Ø49*71mm

437917 / 437717



437817 / 437617

TONE S LI AISI316 / S LI S RO AISI316 / S RO

LED POWER: 0.9W
LED OUTPUT:/
SYSTEM POWER: 1.4W
SYSTEM OUTPUT:19Lm/3000K
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø37*29mm
HOLE SIZE: Ø49*71mm

437514A / 437314A



437414A / 437214A

TONE IN AISI316 / IN

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 2.1W
SYSTEM OUTPUT: 15Lm
INPUT: 100-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø50*36mm
HOLE SIZE: Ø45mm/Ø70mm

413011A / 413111A



TONE IN AISI316 DC

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 1.5W
SYSTEM OUTPUT: 15Lm
INPUT: 24VDC,50/60Hz
CRI: 80
DIMENSION: Ø50*46mm
HOLE SIZE: Ø45mm/Ø70mm

402004



TONE S LI RGB AISI316 DC / S LI RGB DC / S RO RGB AISI316 DC / S RO RGB DC

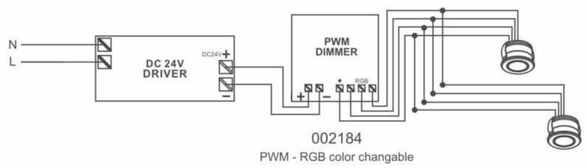

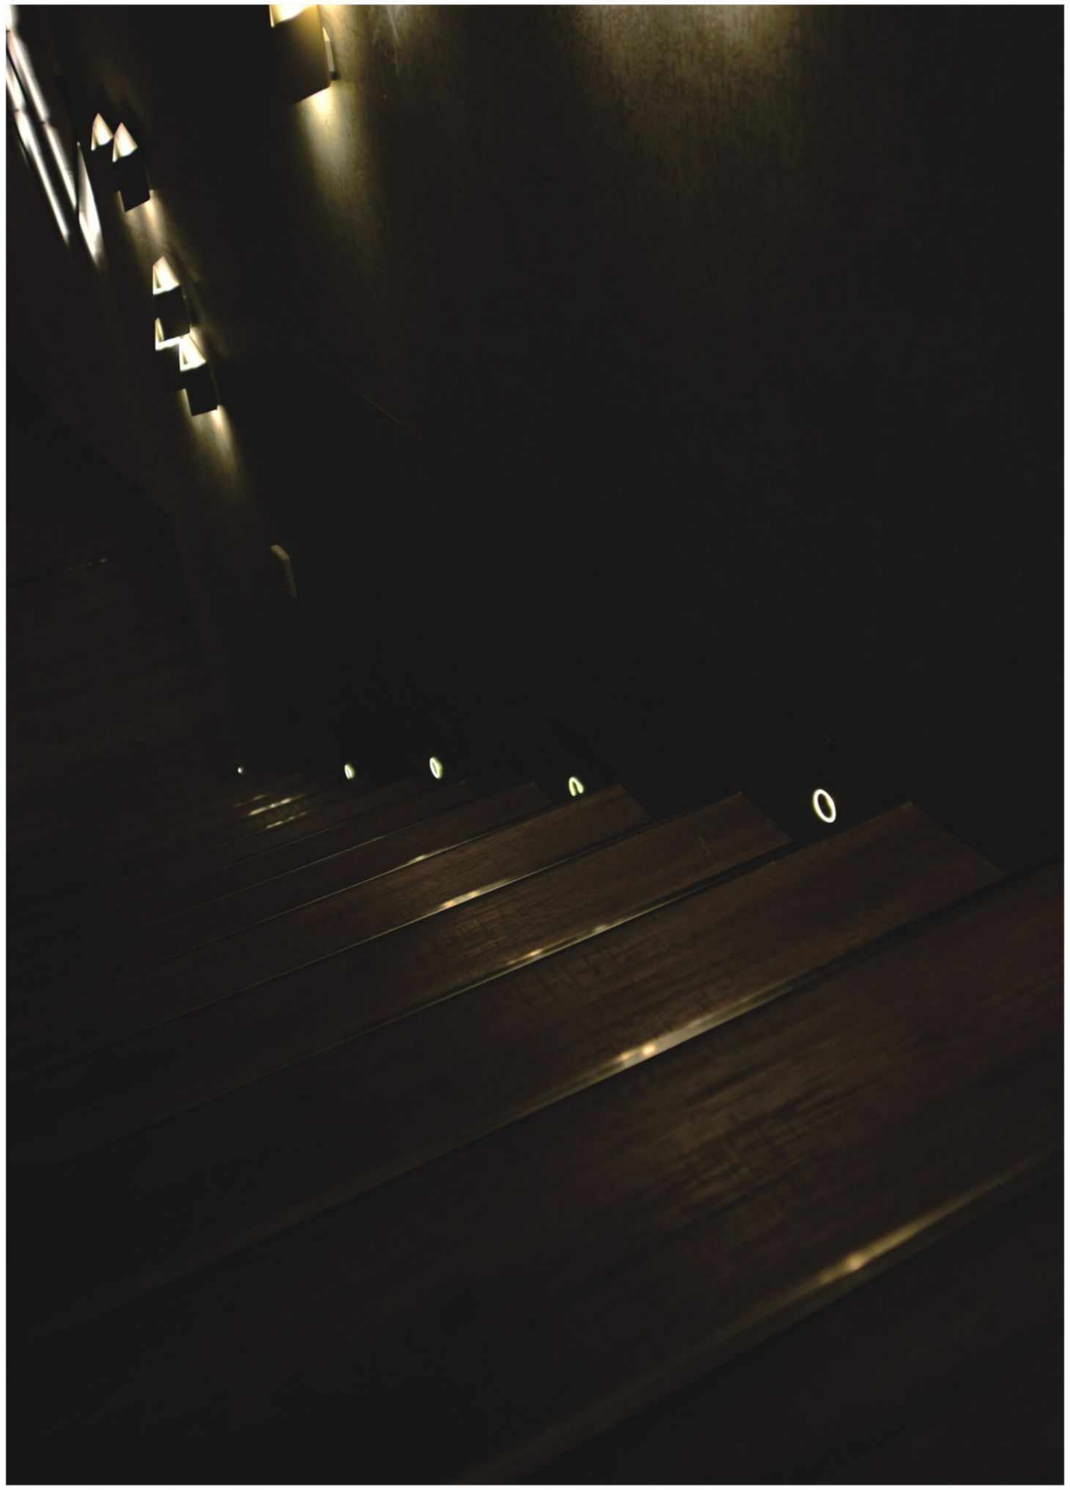

TABLE LAMP

AGARIC
355

ALFA
358

COLUMN
362

COSMOS
372

LAGO
374

SEPHORA V
374

SEPHORA H
377

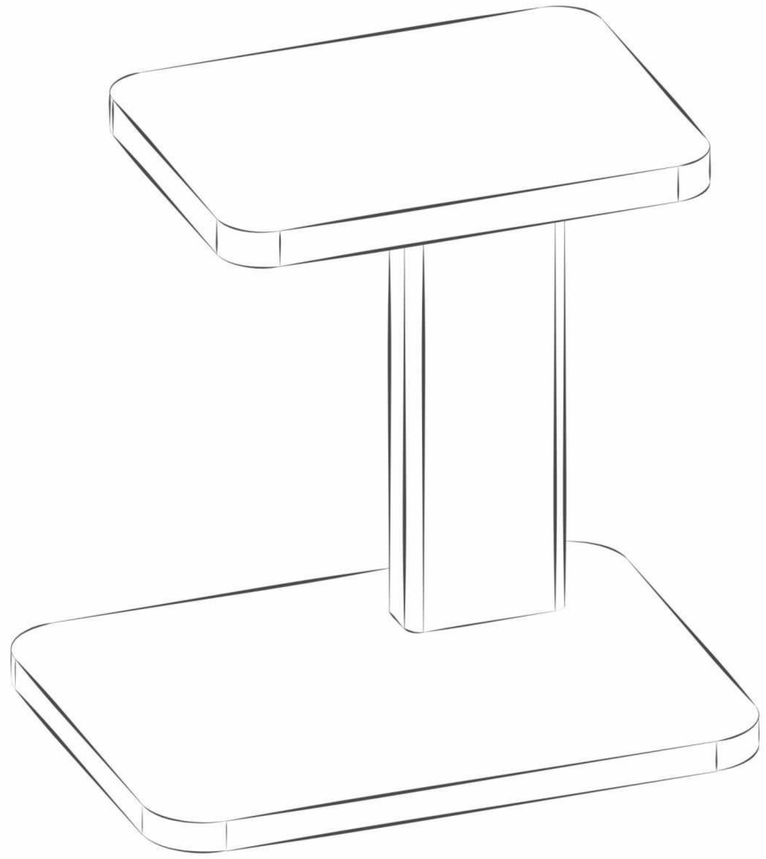

AGARIC

AGARIC with its unique minimalist form can match any room design,
be it bedroom or living room.
The aureole light on the top gives perfect soft light effect.

Touch DIM can easily regulate the brightness of the lamp.

IP20 100-240VAC DIM TOUCH

AGARIC

429814DT

LED POWER:8.5W
CRI: 90
SYSTEM POWER:10.7W
OUTPUT: 531Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø200*214mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
429814DT

COLOR FINISHINGS:

PAW PAB PCY

ALFA

ALFA collection is a unique example of minimal style and functionality. This splendid series of floor and table lamps with DIM function is the best choice for any room.

CE IP20 100-240VAC DIM TOUCH

T

ALFA T

LED POWER: 20.64W
CRI: 90
SYSTEM POWER: 24W
OUTPUT: 1032Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 467*306.5*70mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
431914DT

431914DT





SHORT PRESS
- ON/OFF
- 2700K
- 4200K
- 5700K

CCT

LONG PRESS
Adjust brightness
0-100%

DIM

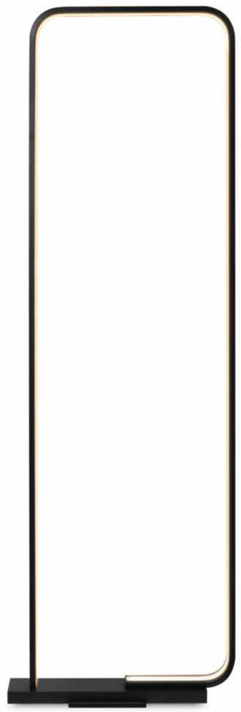



F

ALFA F

LED POWER: 55W
CRI: 90
SYSTEM POWER: 60W
OUTPUT: 2752Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1351*456.5*70mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
432014DT

432014DT

SHORT PRESS
- ON/OFF
- 2700K
- 4200K
- 5700K

LONG PRESS
Adjust brightness
0-100%

COLUMN

COLUMN doesn't need much time to become a classic collection. Ultra thing pole with lighting disc on the top guarantees a very powerful light beam and splendid atmosphere in the room. Thanks to its unique design, COLUMN can be considered as additional decorative element, giving perfect aesthetes detail to the whole design concept.

COLUMN collection is presented by floor and table lamps that are perfectly completing each other. Thanks to special magnetic mechanism, the lighting disk could be turned and light direction could be easily changed up or down. DIM function is included.

CE IP20 100-240VAC DIM TOUCH

T

COLUMN T

LED POWER: 15W
CRI: 90
SYSTEM POWER: 18W
OUTPUT:560Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø200*446mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
429114DT

429114DT

COLOR FINISHINGS:

PAB PAW

F

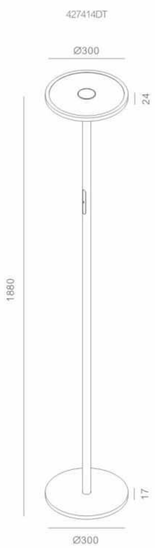

COLUMN F

LED POWER: 26W
CRI: 90
SYSTEM POWER: 28W
OUTPUT: 1430Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø300*1780mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
427414DT

COLOR FINISHINGS:

PAB PAW

COLUMN T/F





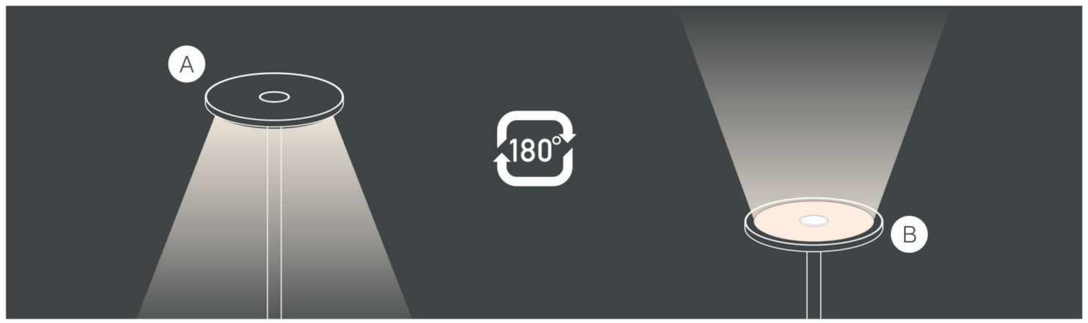

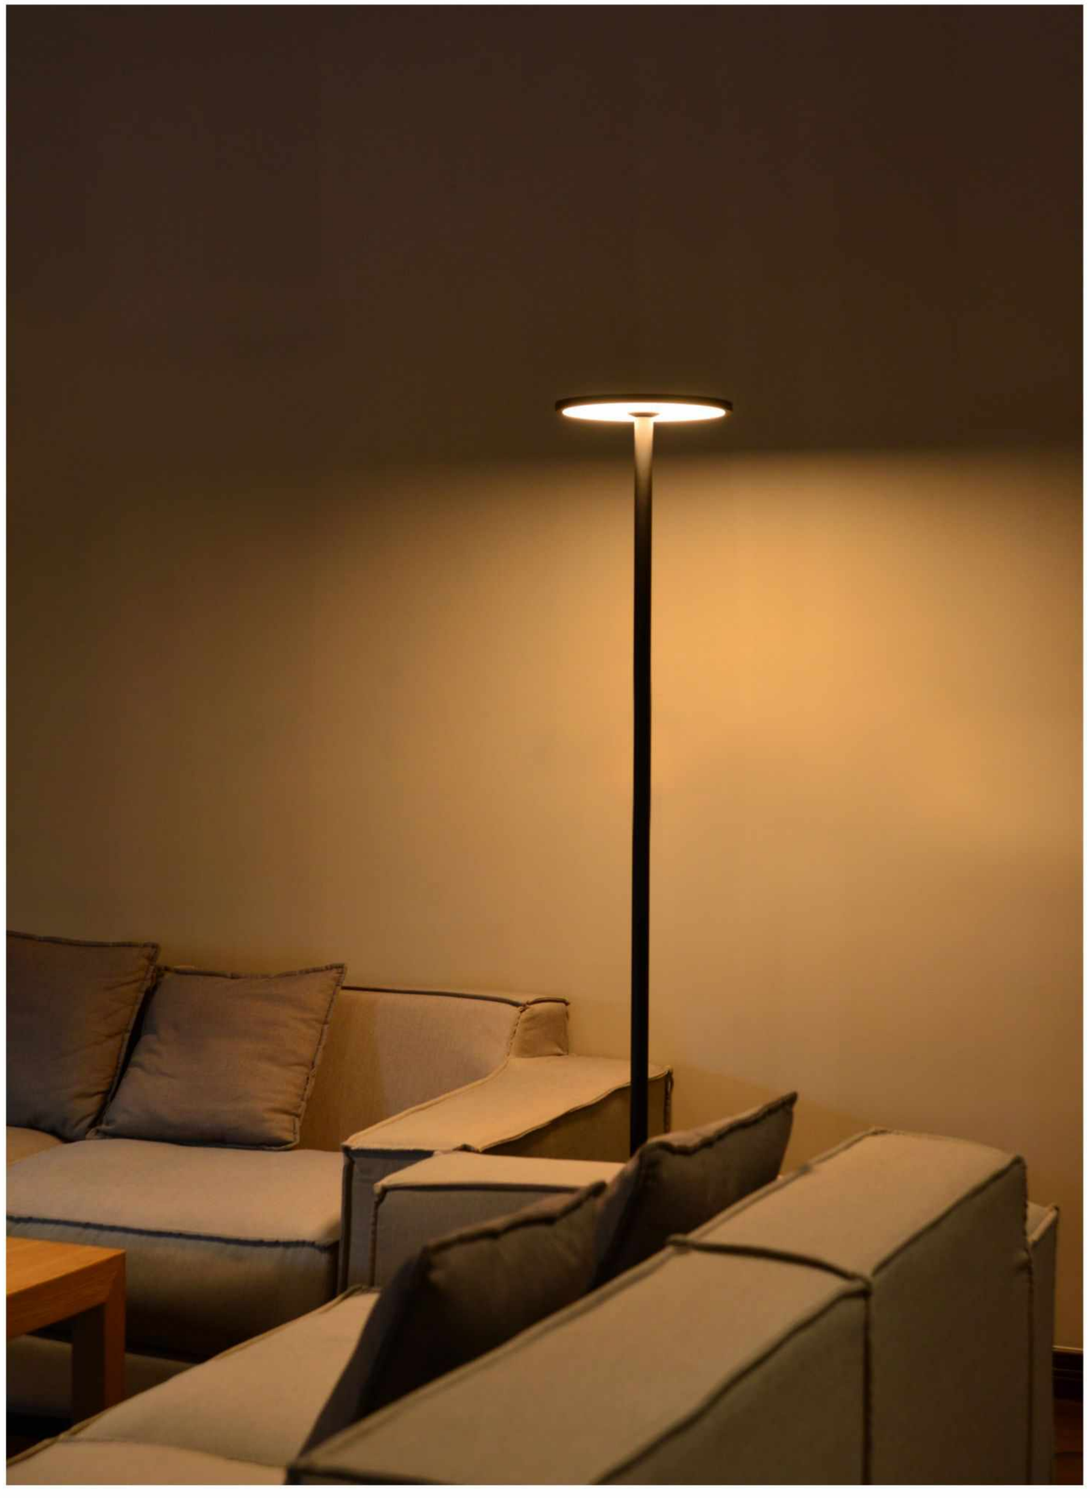

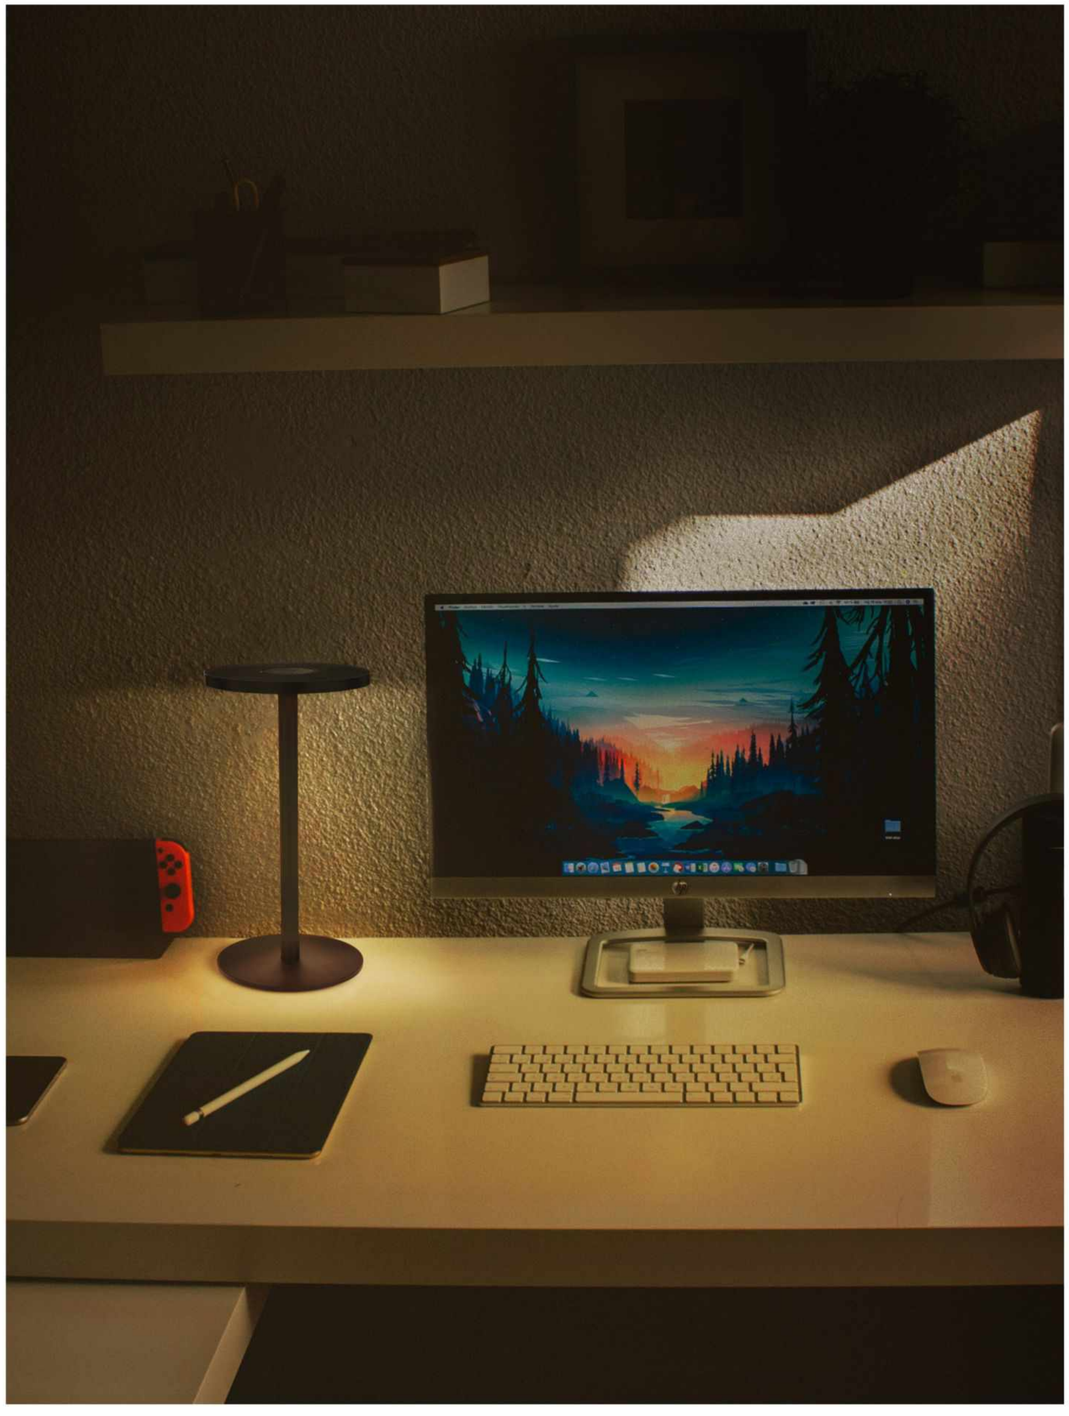

COSMOS

COSMOS is created in accordance with rules and tradition of minimalist style.
Sharp geometrical forms and simple design brings additional elegance to any room.
Unexpectedly bright colors champagne yellow and green are available.
COSMOS is the best choice for auxiliary lighting.
Touch DIM and USB charger slot are included.

CE IP20 100/220-240VAC DIM TOUCH USB CHARGER

COSMOS

LED POWER:6W
CRI: 90
SYSTEM POWER:8.6W
OUTPUT: 411Lm/4000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 200*150*197mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
426514DT

426514DT



COLOR FINISHINGS:

PCY PGN PBK

LAGO

LAGO, with its simple minimal design, has become an ideal choice for an auxiliary lamp or reading lamp.
Special optics provides maximum light for the surface of the table.
DIM function is included.

CE IP20 100-240VAC DIM PUSH

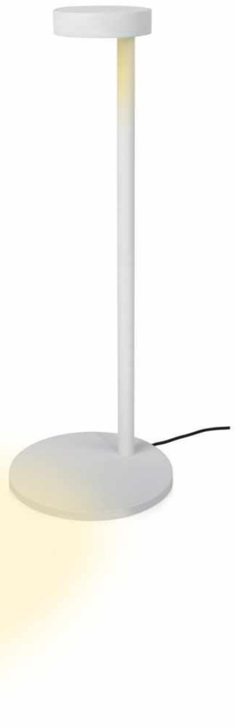

LAGO

LED POWER:4.4W
CRI: 90
SYSTEM POWER:5.1W
OUTPUT: 175Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø150*418mm
HOLE SIZE: /

L

RECOMMEND

DIM PUSH
429011DT

429011DT

COLOR FINISHINGS:

PAB PAW

SEPHORA

SEPHORA is distinguished by its stylish appearance and unique performance. Minimal design, simple forms and maximum functionality are key words to describe SEPHORA. Frosted glass globe together with DIM function provides soft and pleasant light effect for each room.

CE IP20 100-240VAC DIM TOUCH

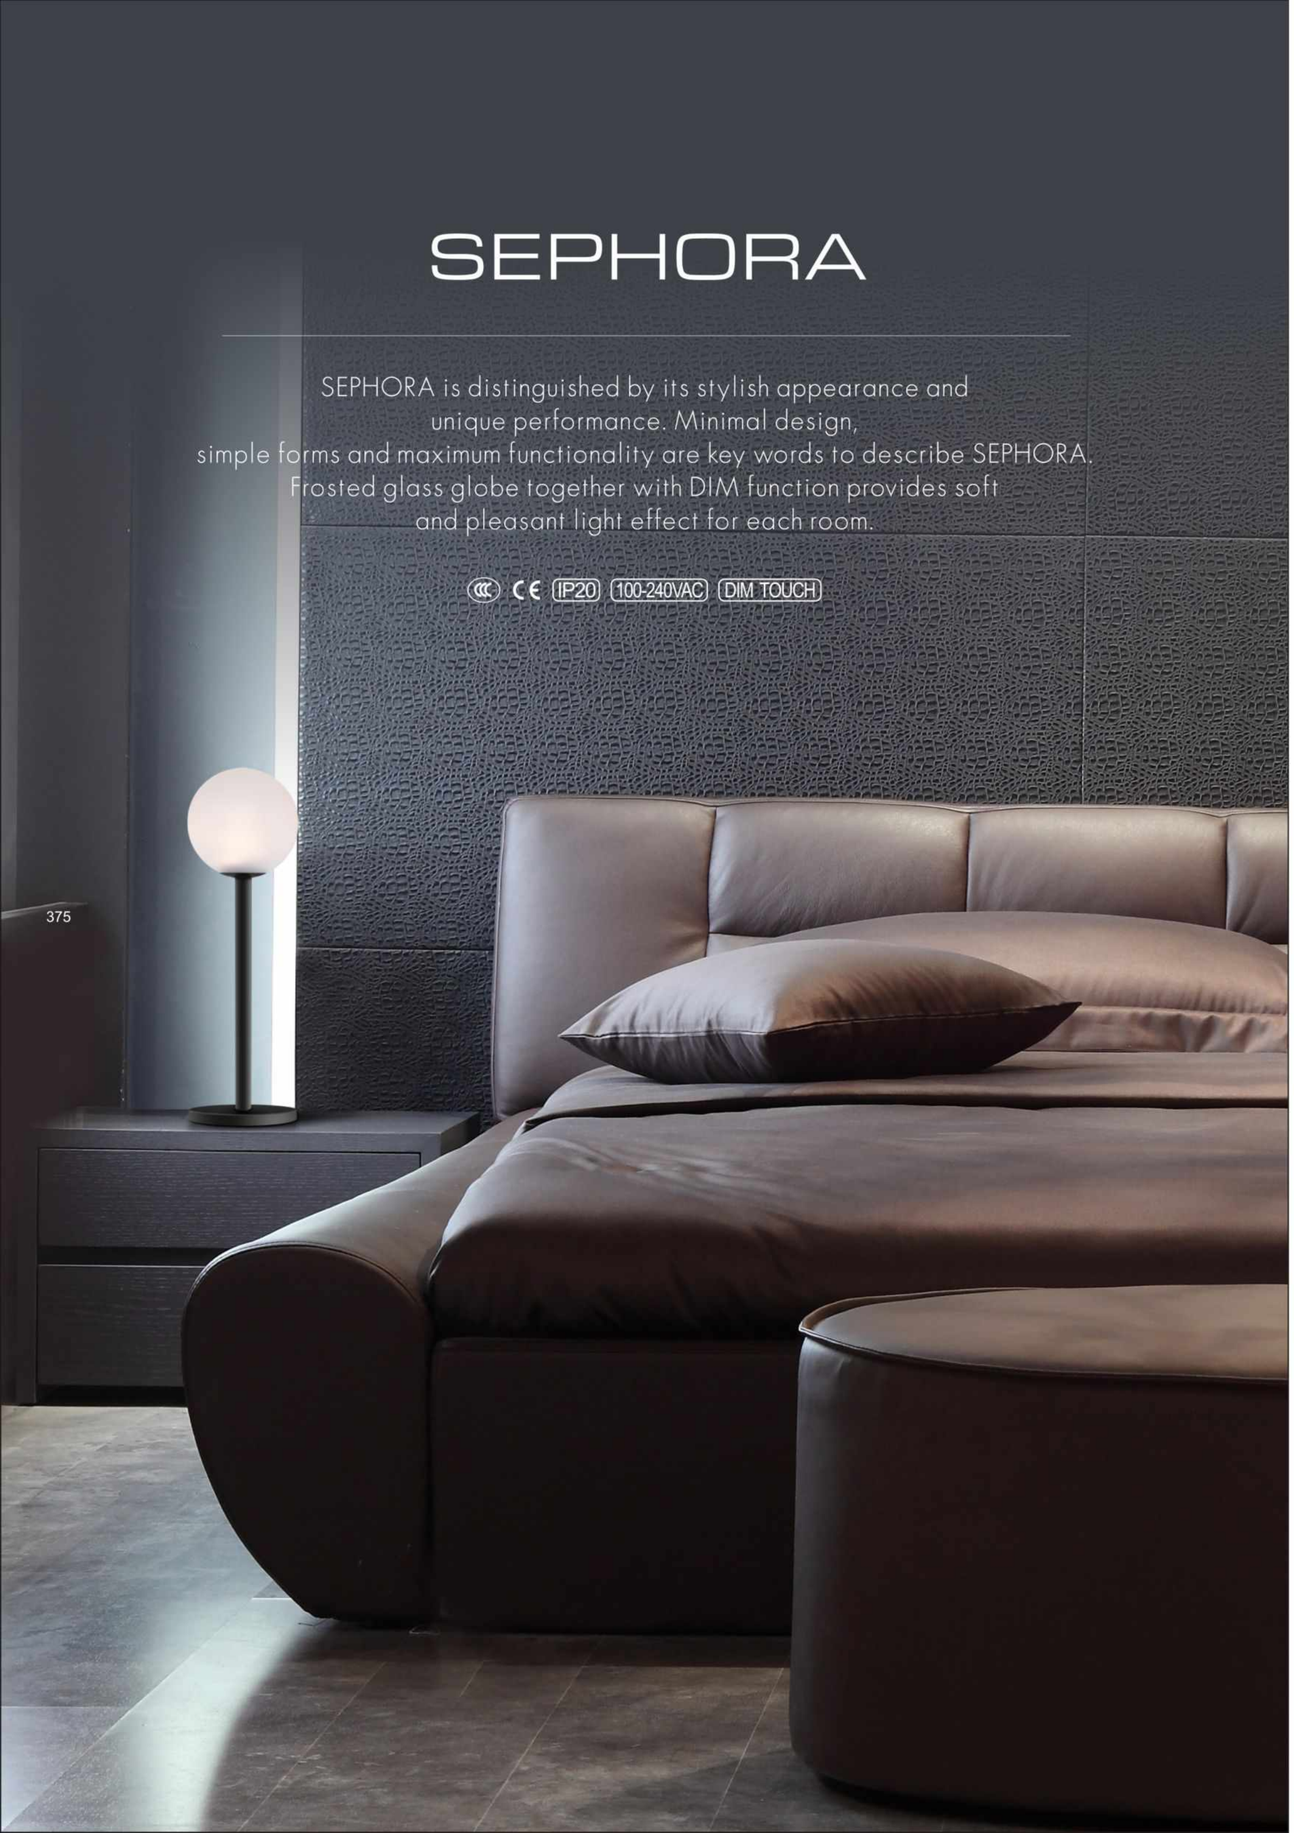

V

SEPHORA V

LED POWER:2.9W
CRI: 80
SYSTEM POWER: 4W
OUTPUT: 207Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø110*336mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
430014DT

430014DT



COLOR FINISHINGS:

PAB PAW

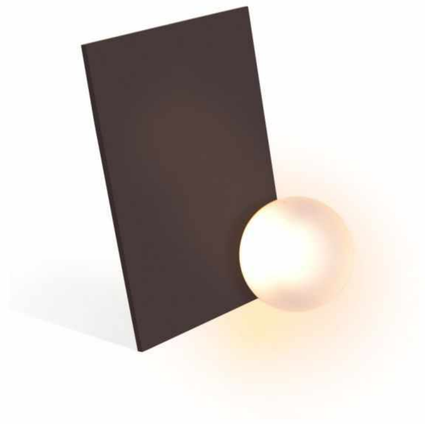

H

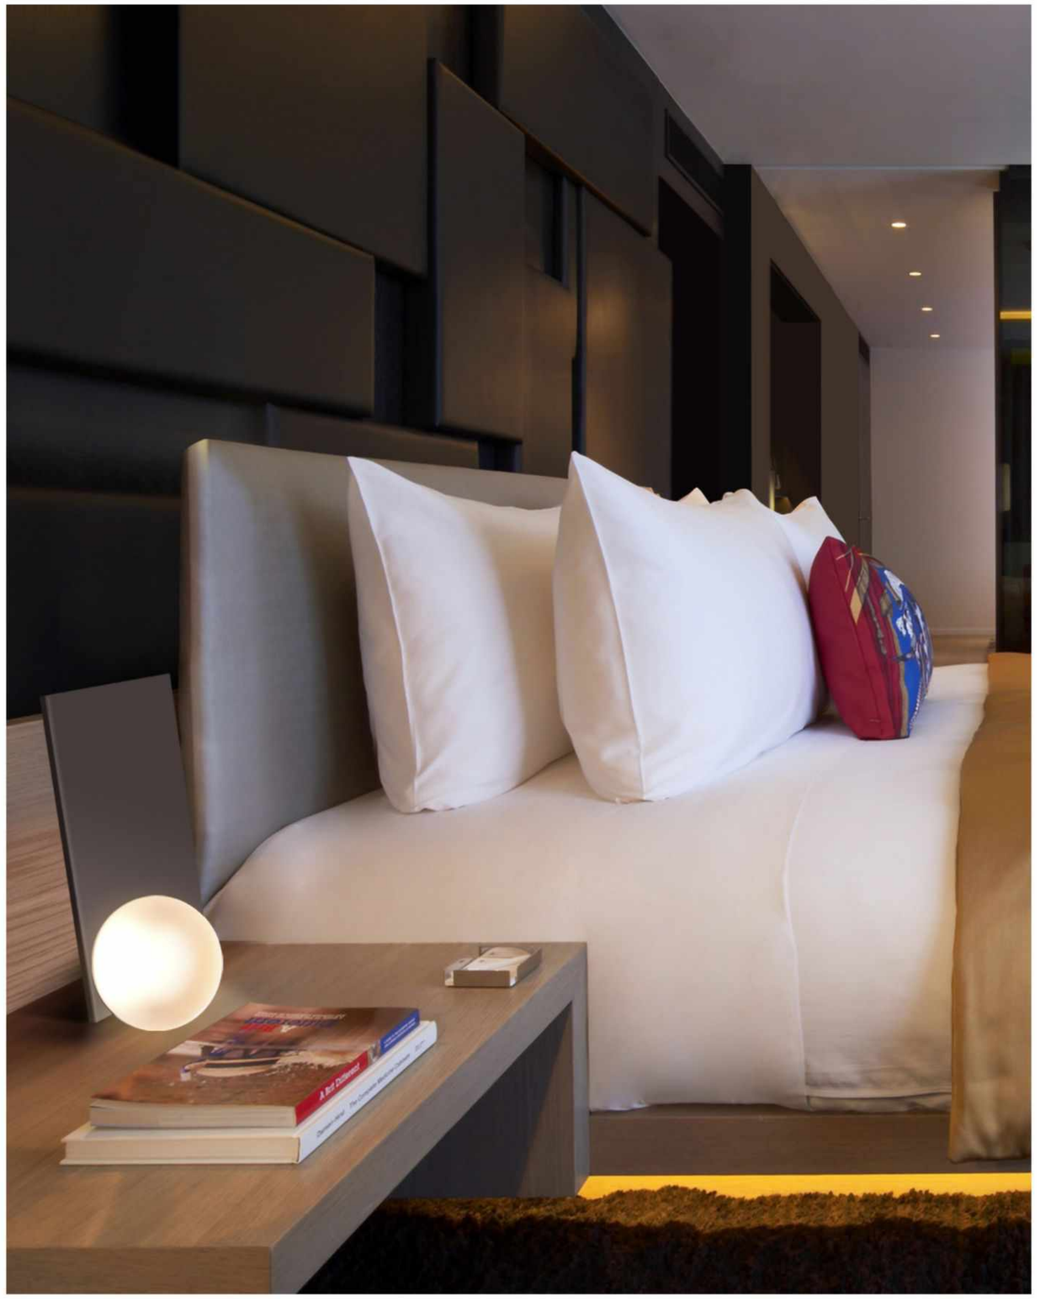

SEPHORA H

430114DT

LED POWER: 2.9W
CRI: 80
SYSTEM POWER: 4W
OUTPUT: 235Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 105*259*196mm
HOLE SIZE: /



L

RECOMMEND

DIM TOUCH
430114DT

COLOR FINISHINGS:

PAB PAW

FLOOR LAMP

ATLAS
383

ALFA F
359

ANDROMEDA
386

CIDA
389

COLUMN
363

FISHING
239

HARI
392

LIRA F5G
267

LIRA F5C
267

LIRA F5
268

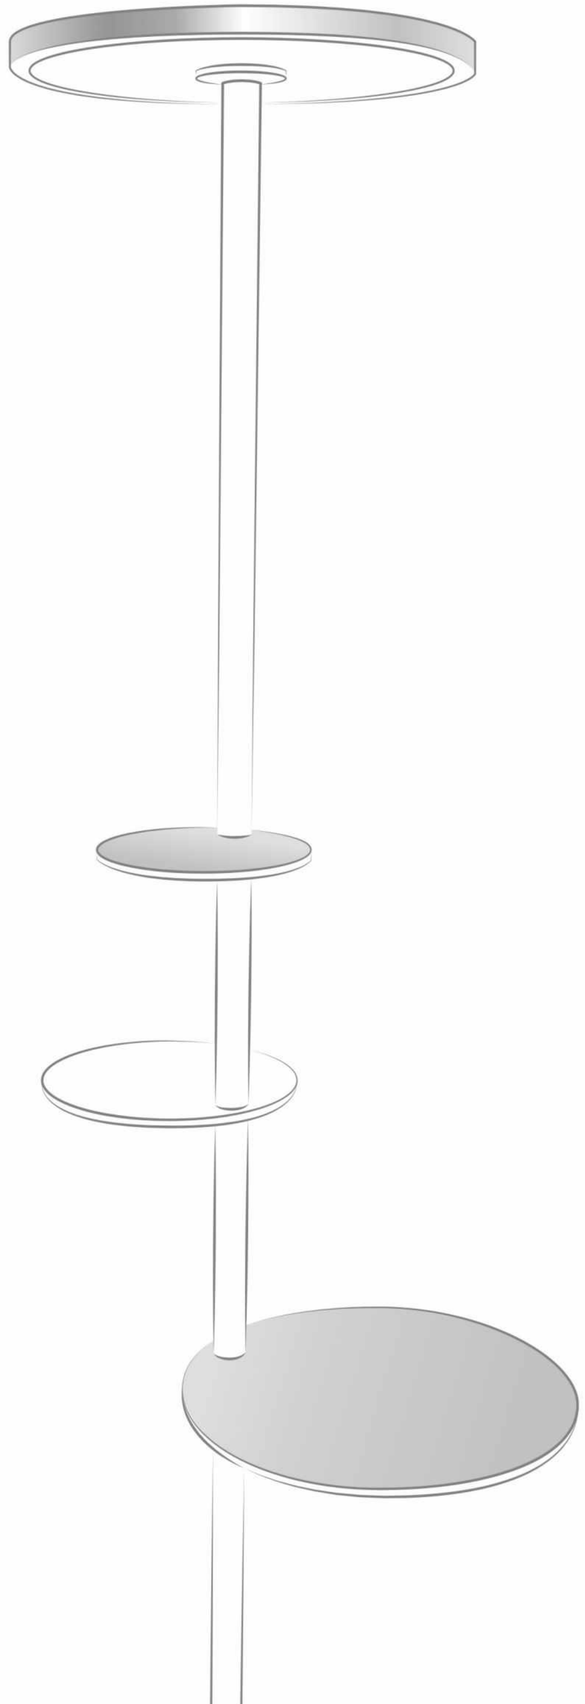

PERFORM YOUR LIGHT

ATLAS

ATLAS is a new concept idea of floor lamp
designed specially for modern office lighting.
This splendid lamp provides great lighting effect for the working area
making it comfortable for working process.
ATLAS has up and down light; down light can be dimmable with the help of push button.

CE IP20 220-240VAC DIM TOUCH

ATLAS

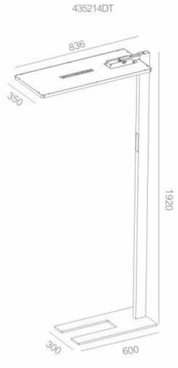

ATLAS

LED POWER:46.9+10.18W
CRI: 90
SYSTEM POWER:67W
OUTPUT: 3173Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 913*350*1910mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
435214DT

COLOR FINISHINGS:

PAB PAW

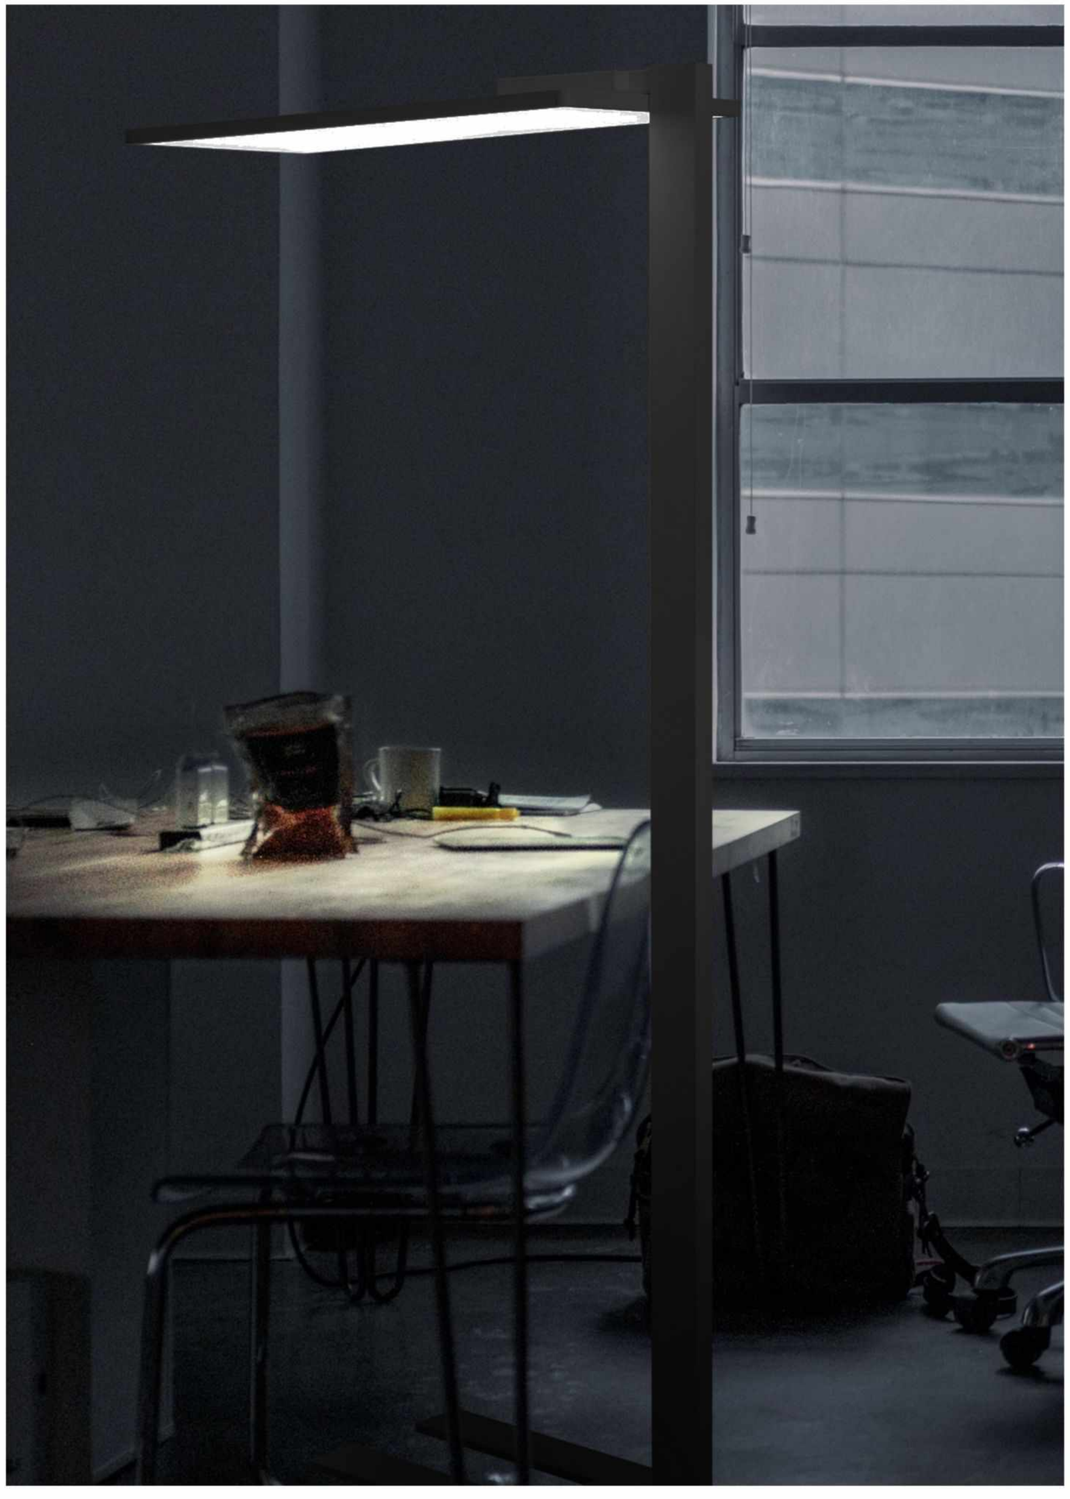

ANDROMEDA

The name of this lamp is coming from one of the most famous and beautiful stars. ANDROMEDA has simple, but at the same time, elegant design. The light is coming from the upper disk that could be easily changed from up lighting to down thanks to special magnetic element. Harmonious combination of black pole and white round decorative elements gives additional splendid effect to the whole concept of the lamp. DIM function is included.

CE IP20 100-240VAC DIM TOUCH

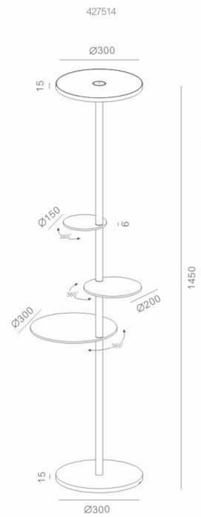

ANDROMEDA R

LED POWER:26W
CRI: 90
SYSTEM POWER:28W
OUTPUT: 1430Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø300*1450mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
427514

COLOR FINISHINGS:

PAB PAW

CIDA

New minimalist design concept of floor lamp, CIDA, can perfectly match any environment. With narrow beam angle, just 15°, and DIM function, CIDA has become the best choice of lamp for reading. The fitting construction makes it easy to adjust the lamp up to 90°, so the light can be focused in the necessary direction however needed.

IP20 100-240VAC DIM PUSH

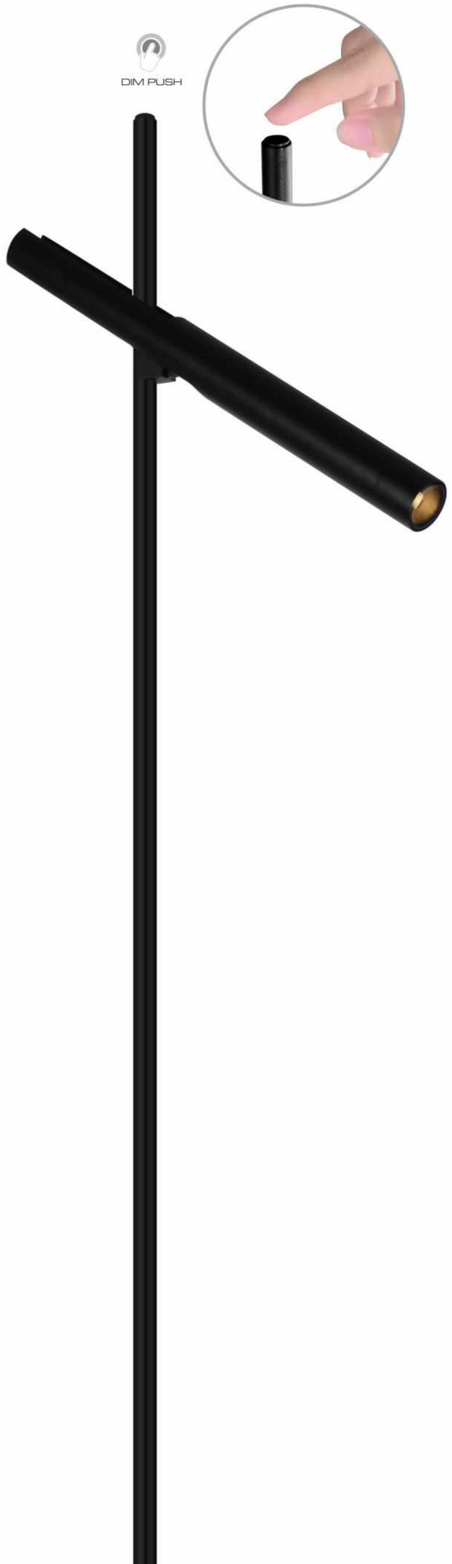

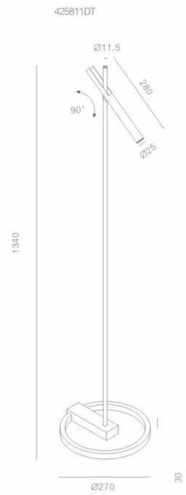

FLOOR

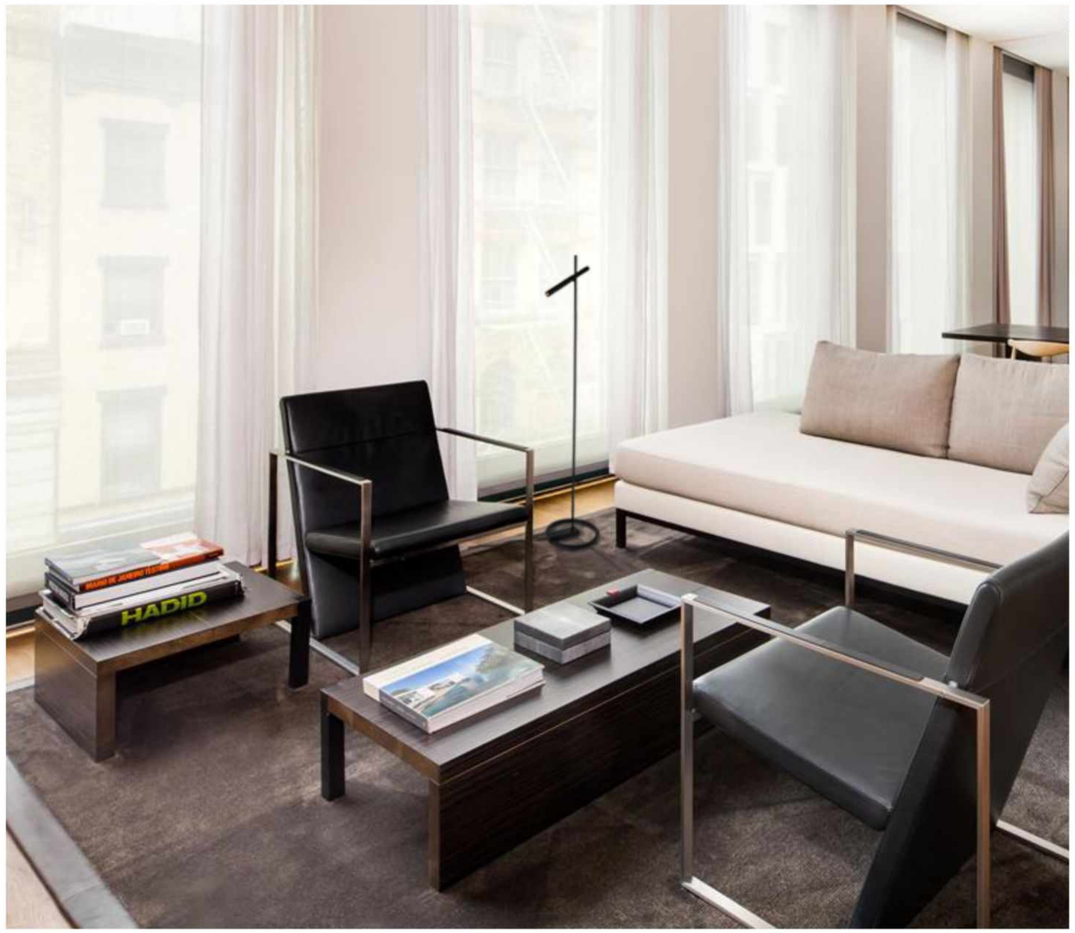

CIDA FLOOR

LED POWER: 6W
CRI: 90
SYSTEM POWER: 8.2W
OUTPUT: 413Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø270*1340mm
HOLE SIZE: /

ANGLE 15°



6W 15° 3000K



6W 15° 3000K



RECOMMEND

DIM PUSH
425811DT

HARI

Sophisticated floor lamp with unique futuristic design has already
won thousands of hearts of designers.
Thanks to its touch DIM function,
it is becoming very convenient to change
the brightness of the lamp.

CE IP20 100-240VAC DIM TOUCH

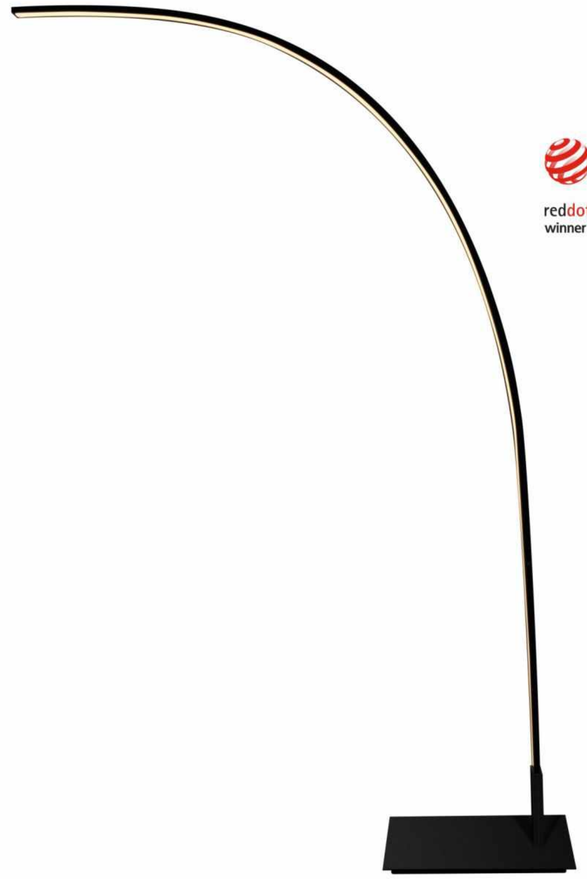

reddot design award
winner 2019

F

HARI F

LED POWER:26W
CRI: 90
SYSTEM POWER:49.3W
OUTPUT: 2107Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 2041.4*1067*230mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
432114DT

SHORT PRESS
- ON/OFF
- 2700K
- 4200K
- 5700K

LONG PRESS
Adjust brightness
0-100%

COLOR FINISHINGS:

PAB PAW

INTERIOR

23-61 CEILING RECESSED

73-188 CEILING SUSPENDED

191-322 WALL SURFACE

325-352 WALL RECESSED

355-378 TABLE LAMP

381-392 FLOOR LAMP

ACCESSORIES

395-404 ELECTRICAL SYSTEM

ACCESSORIES

ELECTRICAL SYSTEM

387-396

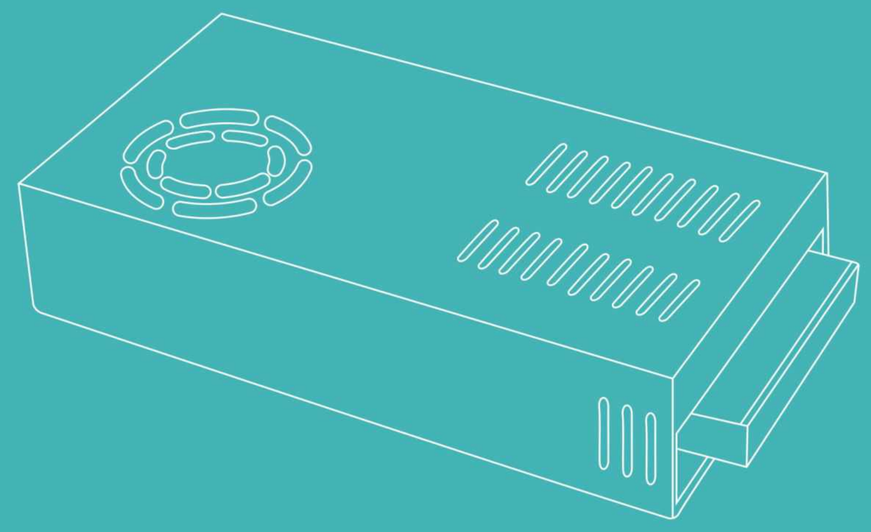

CE RoHS

LRS

(On Request)

Product Name	Power	Input	Output	IP	Mode No.
LRS-50-48	50W	85-264VAC	48VDC 1.1A	20	002030
LRS-75-48	75W	85-264VAC	48VDC 1.6A	20	002031
LRS-100-48	100W	85-264VAC	48VDC 2.3A	20	002032
LRS-200-48	200W	90-132VAC/180-264VAC	48VDC 4.4A	20	002034
LRS-350-48	350W	90-132VAC/180-264VAC	48VDC 7.3A	20	002035

Product Name	Power	Input	Output	IP	Mode No.
LRS-50-24	50W	90-130VAC/180-264VAC	24VDC 2.2A	20	001017
LRS-75-24	75W	90-130VAC/180-264VAC	24VDC 3.2A	20	001660
LRS-100-24	100W	90-130VAC/180-264VAC	24VDC 4.5A	20	001623
LRS-200-24	100W	90-130VAC/180-264VAC	24VDC 8.8A	20	001624
LRS-350-24	350W	90-130VAC/180-264VAC	24VDC 14.6A	20	002538

HLG SERIES

(On Request)

Product Name	Power	Input	Output	IP	Mode No.
HLG-100H-24	100W	90-264VAC	24VDC 4.0A	65	001025
HLG-150H-24	150W	90-264VAC	24VDC 6.3A	65	001026
HLG-240H-24	240W	90-264VAC	24VDC 10.0A	65	001027
HLG-320H-24	320W	90-264VAC	24VDC 13.34A	65	001028

LPV SERIES

(On Request)

Product Name	Power	Input	Output	IP	Mode No.
LPV-20-24	20W	90-264VAC	24VDC 0.84A	67	001029
LPV-35-24	35W	90-264VAC	24VDC 1.5A	67	001030
LPV-60-24	60W	90-264VAC	24VDC 2.5A	67	001031
LPV-100-24	100W	90-264VAC	24VDC 4.2A	67	001032

TRIAC DIMMING PANEL

DT2-1

DRIARTE DT2-1

002237 DIM TRIAC

Dimming mode:	DIM TRIAC
Input Voltage:	90-260Vac
Control Mode:	Trailing Edge Lighting Dimmer
Max Current Load:	1Ax2CH
Max Output Power:	220W/440W(110Vac/220Vac)
Dimming Range:	5%～100%
Working Temperature:	-20°C～60°C
Package Size:	L113xW111xH57(mm)
Weight(G.W):	205g

S1-T

SKYDANCE S1-T

002072 DIM TRIAC

Dimming mode:	DIM TRIAC
Input Voltage:	100-240Vac
Control Mode:	Trailing Edge Lighting Dimmer
Max Current Load:	1.2Ax1CH
Max Output Power:	132W/264W(110Vac/220Vac)
Dimming Range:	5%～100%
Working Temperature:	-30°C～55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	215g

D350S

AcTEC D350S

000826 DIM TRIAC

Dimming mode:	DIM TRIAC
Input Voltage:	220-240Vac
Control Mode:	Trailing Edge Lighting Dimmer
Max Current Load:	1.5Ax1CH
Max Output Power:	10-350W
Dimming Range:	5%～100%
Working Temperature:	0°C～40°C
Package Size:	L106xW106xH60(mm)
Weight(G.W):	120g

CE RoHS

1-10V DIMMING PANEL

DX3-1

DRIARTE DX3-1

002238 DIM 1-10V

Dimming mode:	DIM 1-10V
Input Voltage:	90-260Vac
Output:	0-10Vx3CH
Max Output Power:	1650W/330W(110Vac/220Vac)
Dimming Range:	0%-25%-50%-75%-100%
Working Temperature:	-20°C~60°C
Package Size:	L113xW111xH57(mm)
Weight(G.W):	209g

T18-1

SKYDANCE T18-1

002073 DIM 1-10V

Dimming mode:	DIM 1-10V
Input Voltage:	85-265Vac
Output:	0-10Vx4CH
Max Output Power:	/
Dimming Range:	0.1%~100%
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	245g

PWM DIMMING PANEL

T2-1

SKYDANCE T2-1

002071 DIM COLOR RF-2.4

Dimming mode:	PWM
Input Voltage:	12~24Vdc
Max Current Load:	3Ax4CH Max 12A
Max Load Power:	144W/288W(12Vdc/24Vdc)
Control Mode:	PWM Color Temperature(RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	230g

T3-1

SKYDANCE T3-1

002184 DIM RGB RF-2.4

Dimming mode:	PWM
Input Voltage:	12~24Vdc
Max Current Load:	4Ax3CH Max 12A
Max Load Power:	144W/288W(12Vdc/24Vdc)
Control Mode:	PWM RGB (RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	230g

DMX DIMMING PANEL

T12-1

SKYDANCE T12-1

002183 DIM COLOR DMX RF-2.4

Dimming mode:	DMX
Input Voltage:	85-265Vac
Max Current Load:	/
Max Load Power:	/
Control Mode:	DMX512 Color Temperature(RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	245g

T14-1

SKYDANCE T14-1

002302 DIM RGBW DMX RF-2.4

Dimming mode:	DMX
Input Voltage:	85-265Vac
Max Current Load:	/
Max Load Power:	/
Control Mode:	DMX512 RGBW(RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	245g

CE RoHS

RGB CONTROLLER

LT-3600RF

LTECH LT-3600RF 001034

Input Voltage:	12~24Vdc
Max Current Load:	6Ax3CH Max 18A
Max Output Power:	216W/432W(12Vdc/24Vdc)
Function Mode:	16Modes
Control Button:	8 Press Button
RF Remote Distance:	100m
Working Temperature:	-30°C~55°C
Package Size:	L313xW50xH32(mm)
Weight(G.W):	240g

LT-8030

LTECH LT-8030 000151

Input Voltage:	5~24Vdc
Input Signal:	DMX512
DMX512 Socket:	XLR-3,Green Terminal
Max Current Load:	4Ax3CH Max 12A
Max Output Power:	60W/144W/288W(5Vdc/12Vdc/24Vdc)
Dimming Range	0~100%
Working Temperature:	-30°C~55°C
Package Size:	L135xW70xH50(mm)
Weight(G.W):	305g

LT-3060

LTECH LT-3060 001039

Input Voltage:	5~24Vdc
Input Signal:	PWM
Max Current Load:	5Ax3CH Max 15A
Max Output Power:	75W/180W/360W(5Vdc/12Vdc/24Vdc)
Working Temperature:	-30°C~55°C
Package Size:	L123xW42xH42(mm)
Weight(G.W):	100g

LT-870

LTECH LT-870 001035

Input Voltage:	5~24Vdc
Input/Output Signal:	DMX512
Working Frequency Channel:	2.4GHz ISM 64Channels
Max Transmitted Power:	20dBm
Receiver Sensitvity:	-96dBm
Communication Distance:	350m
Working Temperature:	-30°C~55°C
Package Size:	L178xW56xH31(mm)
Weight(G.W):	125g

CONNECTION

NORMAL CONNECTION

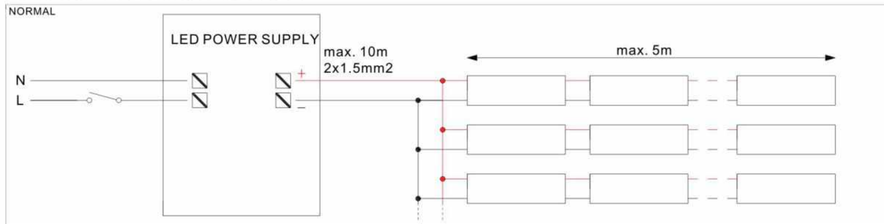

TRIAC DIMMING CONNECTION

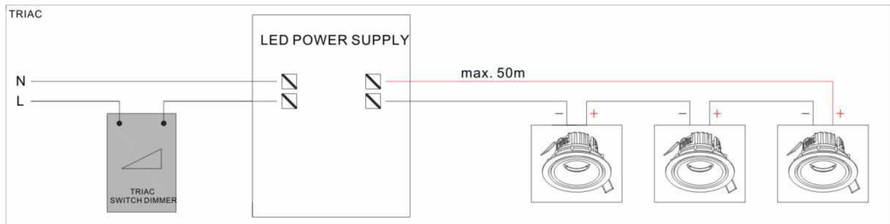

1-10V DIMMING CONNECTION

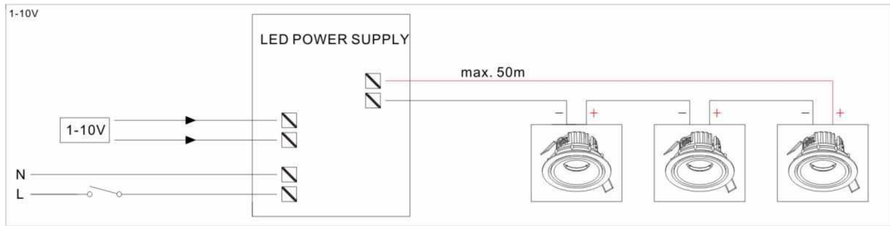

DALI DIMMING CONNECTION

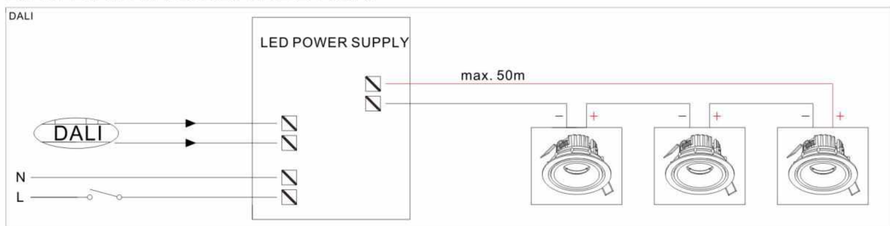

PUSH DIMMING CONNECTION

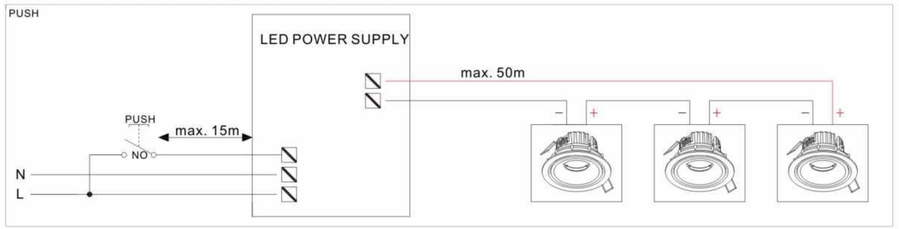

PWM DIMMING CONNECTION

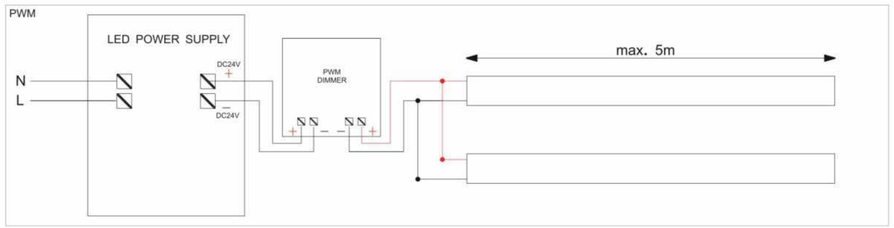

NORMAL RGB CONNECTION

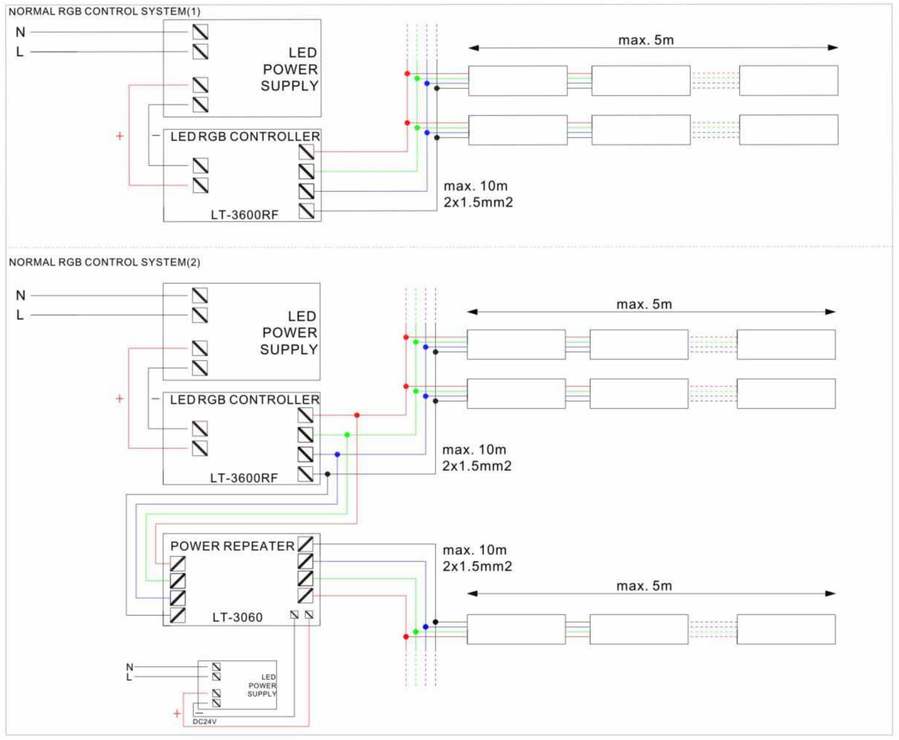

ZIGBEE CONTROL SYSTEM

FLUA SMART PANEL 001272

Input Voltage:	85~250Vac
Max Current Load:	1.25Ax4CH Max 5A/2.5Ax4CH Max 10A
Max Load Power:	550W/220W(110Vac/220Vac)
Working Frequency Channel:	2.4 G Zigbee
Working Temperature:	-30°C~55°C
Package Size:	L110xW94xH50(mm)
Weight(G.W):	246g

NETWORK GATEWAY

NETWORK GATEWAY 001284

Input Voltage:	100~240Vac
Working Frequency Channel:	2.4 G Zigbee 200Channels
Network port standards :	IEEE802
Working Temperature:	-20°C~70°C
Package Size:	L268xW165xH52(mm)
Weight(G.W):	456g
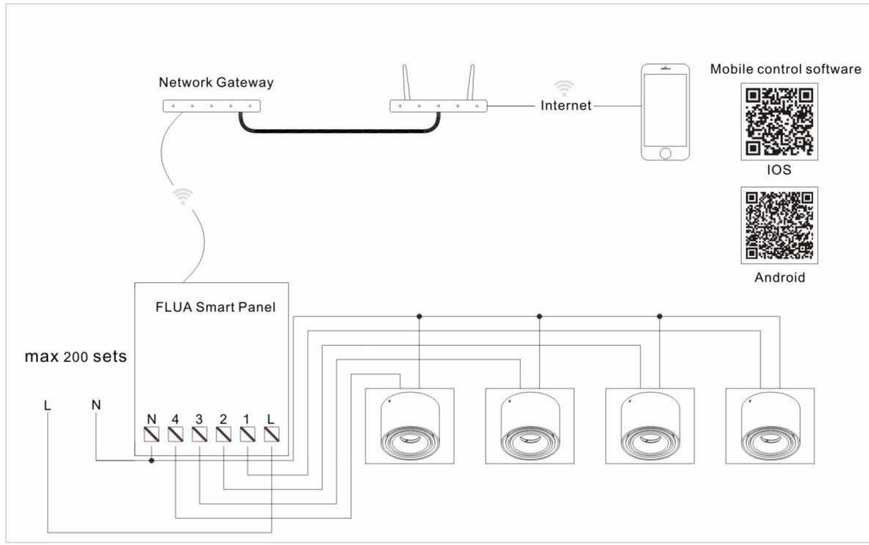
NETWORK CONTROL SYSTEM