



## OUTDOOR PROJECTORS LIGHT series

Ip65 outdoor floor-insert or open-mounted projector lamps, its application is quite flexible. Widely used in gardens, meadows, trees, residential environments or commercial streets And so on.



- Modern & Fashion appearance, suitable for different scenes.
- Combine optics and practicality to create your personalized lighting scheme.



**Adjustability**

- Plug-in and surface mounted mounting methods
- Different front box selection
- Suitable for a variety of scenarios



Floor plug





cover -A

cover -B



OSA4581R





Light Source: OSRAM LED  
Material: Aluminum  
OPTIC: 7°/15°/20°/30°


Luminous flux: 180 lm  
Power: 3W  
Mains voltage: 220-240V

CRI: Ra > 90  
Output voltage: 3V  
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K  
Output current: 700mA  
Cutout: /

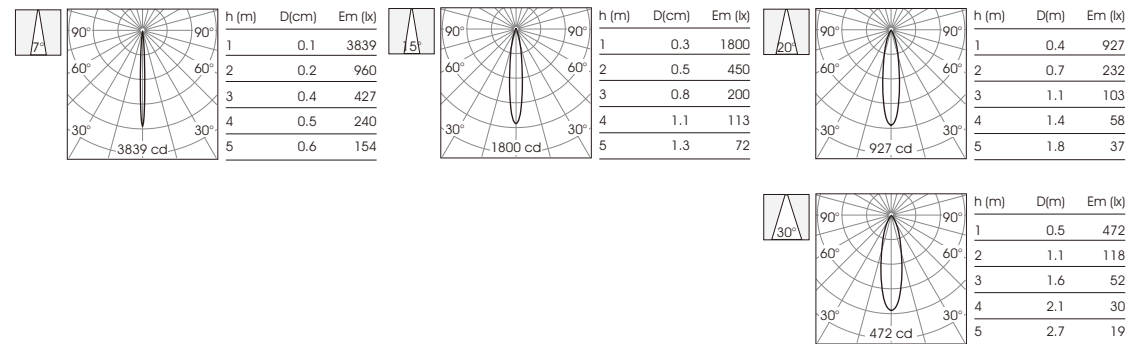

OSA4265R





Light Source: CREE COB  
Material: Aluminum  
OPTIC: 20°/30°



Luminous flux: 700 lm  
Power: 9W  
Mains voltage: 220-240V

CRI: Ra > 90  
Output voltage: 36V  
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K  
Output current: 200mA  
Cutout: /

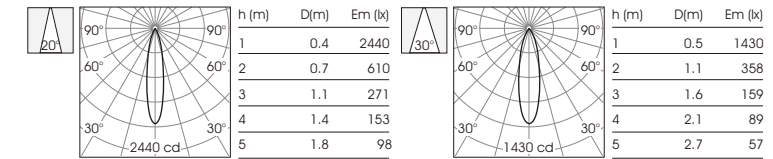

OSA4581S





Light Source: OSRAM LED  
Material: Aluminum  
OPTIC: 7°/15°/20°/30°

Luminous flux: 180 lm  
Power: 3W  
Mains voltage: 220-240V

CRI: Ra > 90  
Output voltage: 3V  
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K  
Output current: 700mA  
Cutout: /

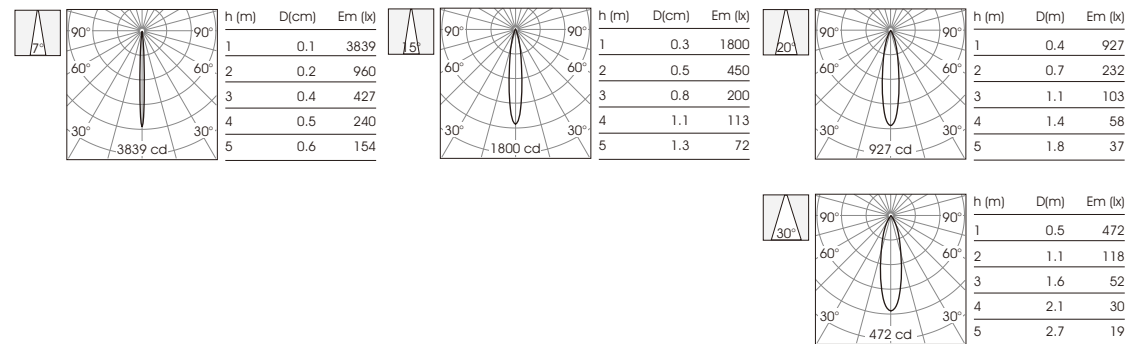

OSA4280R





Light Source: CREE COB  
Material: Aluminum  
OPTIC: 15°/20°/30°


Luminous flux: 1100 lm  
Power: 12W  
Mains voltage: 220-240V

CRI: Ra > 90  
Output voltage: 36V  
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K  
Output current: 300mA  
Cutout: /

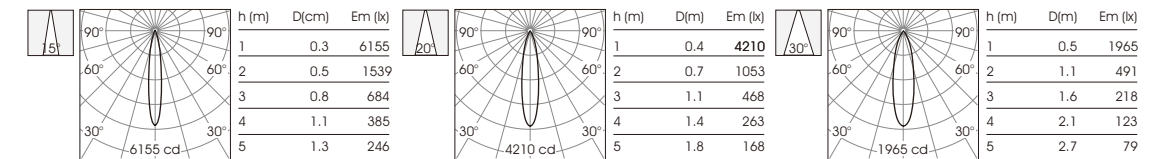

ACCESSORIES







WATERPROOF BOX




## OUTDOOR PROJECTORS LIGHT series



### OSA4295R





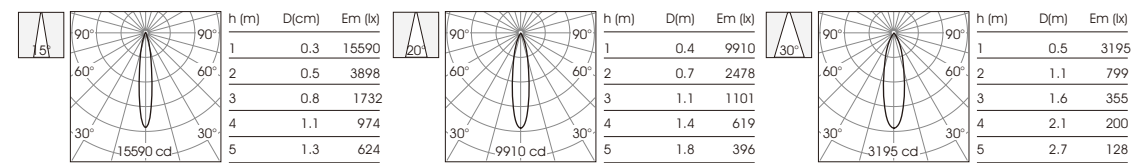



	Light Source: CREE COB	Material: Aluminum	OPTIC: 15°/20°/30°
	Luminous flux: 1800 lm	Power: 20W	Mains voltage: 220-240V
	CRI: Ra > 90	Output voltage: 36V	Description: ADJUSTABLE
	CCT: 2700K/3000K/4000K/5000K	Output current: 500mA	Cutout: /





### OSA4380R





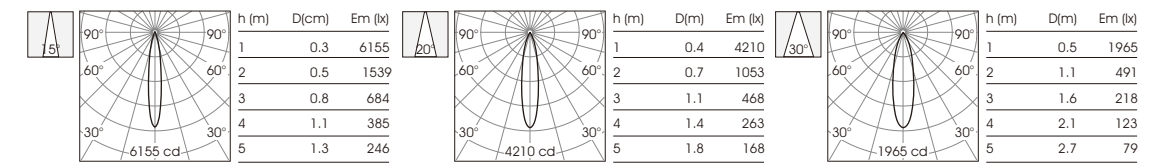


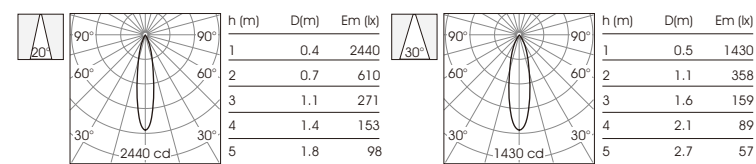
	Light Source: CREE COB	Material: Aluminum	OPTIC: 15°/20°/30°
	Luminous flux: 1100 lm	Power: 12W	Mains voltage: 220-240V
	CRI: Ra > 90	Output voltage: 36V	Description: ADJUSTABLE
	CCT: 2700K/3000K/4000K/5000K	Output current: 300mA	Cutout: /





### OSA4365R








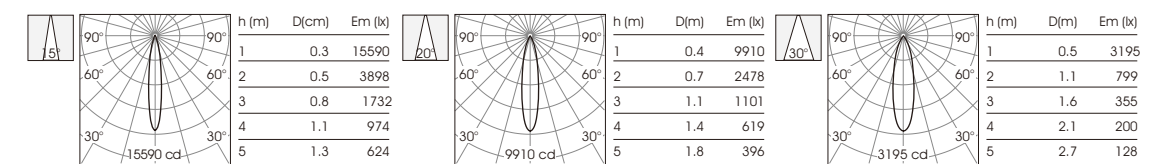
	Light Source: CREE COB	Material: Aluminum	OPTIC: 20°/30°
	Luminous flux: 700 lm	Power: 9W	Mains voltage: 220-240V
	CRI: Ra > 90	Output voltage: 36V	Description: ADJUSTABLE
	CCT: 2700K/3000K/4000K/5000K	Output current: 200mA	Cutout: /




### OSA4395R


	Light Source: CREE COB	Material: Aluminum	OPTIC: 15°/20°/30°
	Luminous flux: 1800 lm	Power: 20W	Mains voltage: 220-240V
	CRI: Ra > 90	Output voltage: 36V	Description: ADJUSTABLE
	CCT: 2700K/3000K/4000K/5000K	Output current: 500mA	Cutout: /



#### ACCESSORIES



#### WATERPROOF BOX







## OUTDOOR LIGHT series

Buried in the ground, used for decorative or indicative lighting, and for washing walls or lighting trees, its application has considerable flexibility.



The waterproof rating is IP67 .Widely used in shopping malls, parking lots, green belts, park tourist attractions, residential areas, urban sculpture, walking streets, building steps and other places.

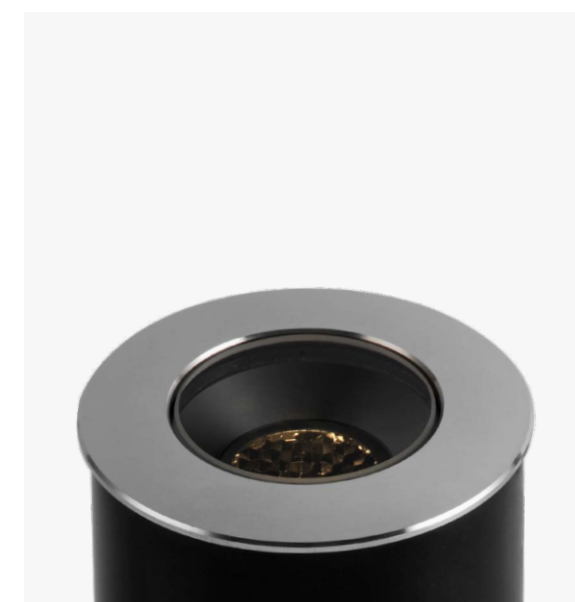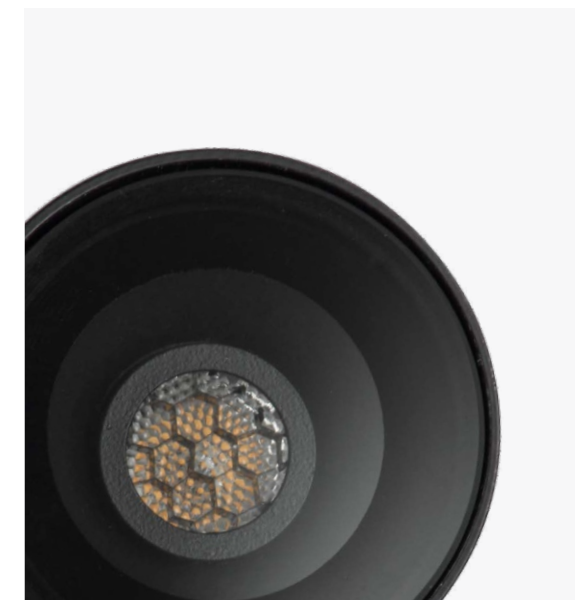

Small volume, big effect.



ODA3050NR



Light Source:  
OSRAM LED

Luminous flux:  
180 lm

CRI:  
Ra > 90

CCT:  
2700K/3000K/4000K/5000K

Material:  
Stainless steel  
Aluminum

Power:  
3W

Output voltage:  
3V





Output current:  
700mA

OPTIC:  
7°/15°/20°/30°



Mains voltage:  
DC24V

Description:  
Fixed

Cutout:  
/



ODA3070NR



Light Source:  
CREE COB

Luminous flux:  
380 lm

CRI:  
Ra > 90

CCT:  
2700K/3000K/4000K/5000K

Material:  
Stainless steel  
Aluminum

Power:  
5W

Output voltage:  
36V




Output current:  
120mA

OPTIC:  
15°/24°/36°

Mains voltage:  
DC24V

Description:  
Fixed

Cutout:  
/




ACCESSORIES




WATERPROOF BOX



- Simple fashionable design, comfortable lighting experience
- Combine optics with practicality to create your own lighting solution
- Simple fashionable design, comfortable lighting experience
- Combine optics with practicality to create your own lighting solution

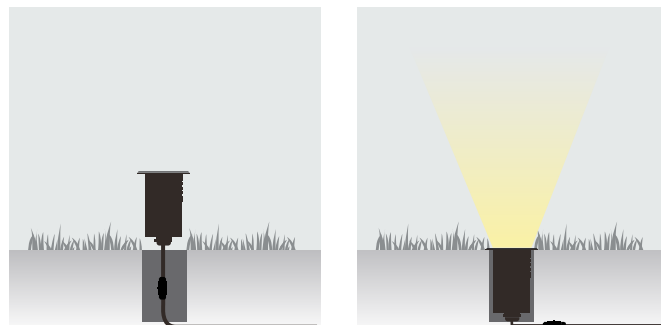

ODA3090NR




- 
- High CRI
- 
- IP67


Light Source: CREE COB  
 Luminous flux: 700 lm  
 CRI: Ra>90  
 CCT: 2700K/3000K/4000K/5000K

Material: Stainless steel  
 Aluminum  
 Power: 9W  
 Output voltage: 36V  
 Output current: 200mA

OPTIC: 15°/20°/30°  
 Mains voltage: DC24V  
 Description: Fixed  
 Cutoff: /

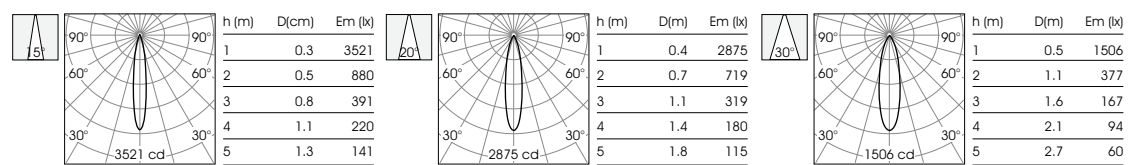

ODA3071NR




- 
- High CRI
- 
- IP67


Light Source: CREE COB  
 Luminous flux: 380 lm  
 CRI: Ra>90  
 CCT: 2700K/3000K/4000K/5000K

Material: Stainless steel  
 Aluminum  
 Power: 5W  
 Output voltage: 36V  
 Output current: 120mA

OPTIC: 15°/24°/36°  
 Mains voltage: DC24V  
 Description: Fixed  
 Cutoff: /

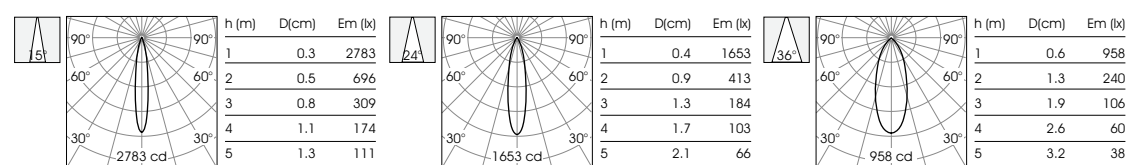

ODA3051NR




- 
- High CRI
- 
- IP67


Light Source: OSRAM LED  
 Luminous flux: 180 lm  
 CRI: Ra>90  
 CCT: 2700K/3000K/4000K/5000K

Material: Stainless steel  
 Aluminum  
 Power: 3W  
 Output voltage: 36V  
 Output current: 700mA

OPTIC: 7°/15°/20°/30°  
 Mains voltage: DC24V  
 Description: Fixed  
 Cutoff: /

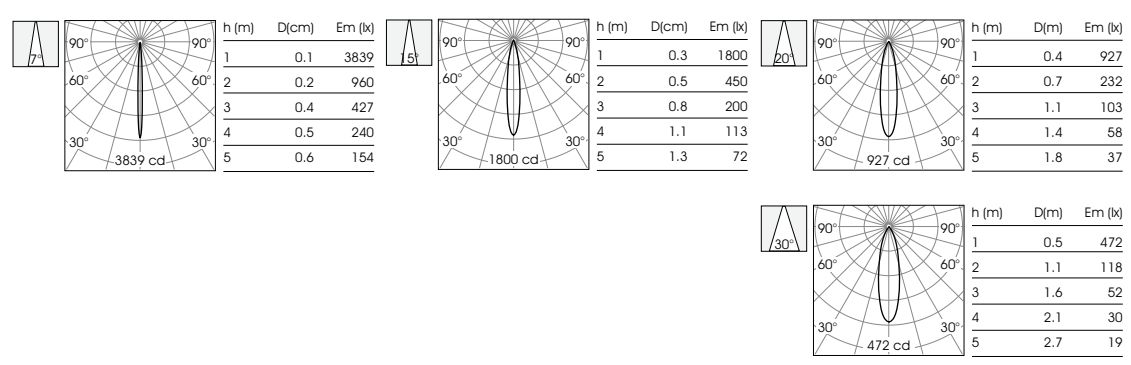

ODA3091NR




- 
- High CRI
- 
- IP67

Light Source: CREE COB  
 Luminous flux: 700 lm  
 CRI: Ra>90  
 CCT: 2700K/3000K/4000K/5000K

Material: Aluminum  
 Power: 9W  
 Output voltage: 36V  
 Output current: 200mA

OPTIC: 15°/20°/30°  
 Mains voltage: DC24V  
 Description: Adjustable direct  
 Cutoff: /






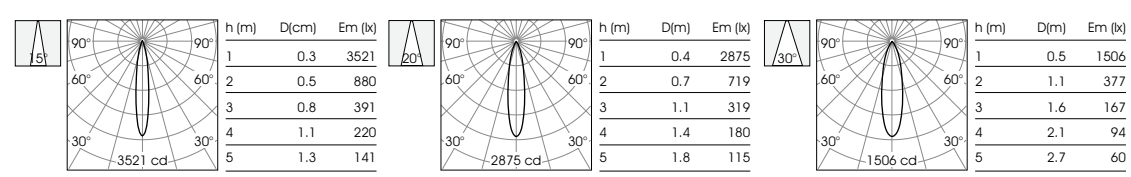


ACCESSORIES



WATERPROOF BOX



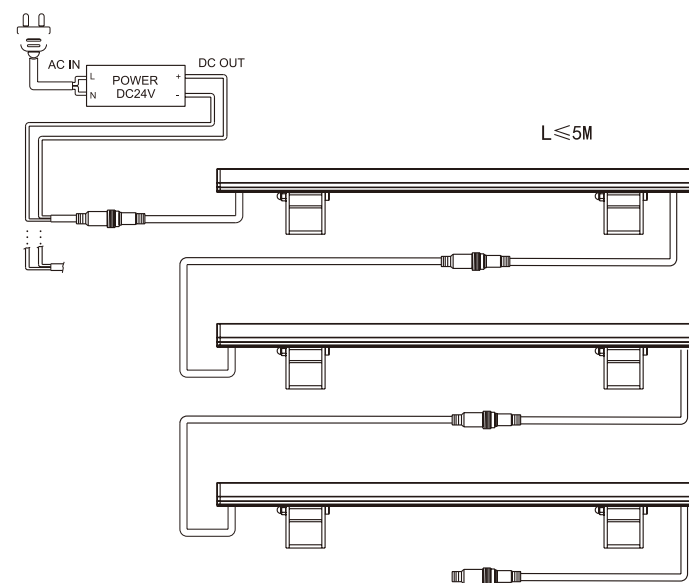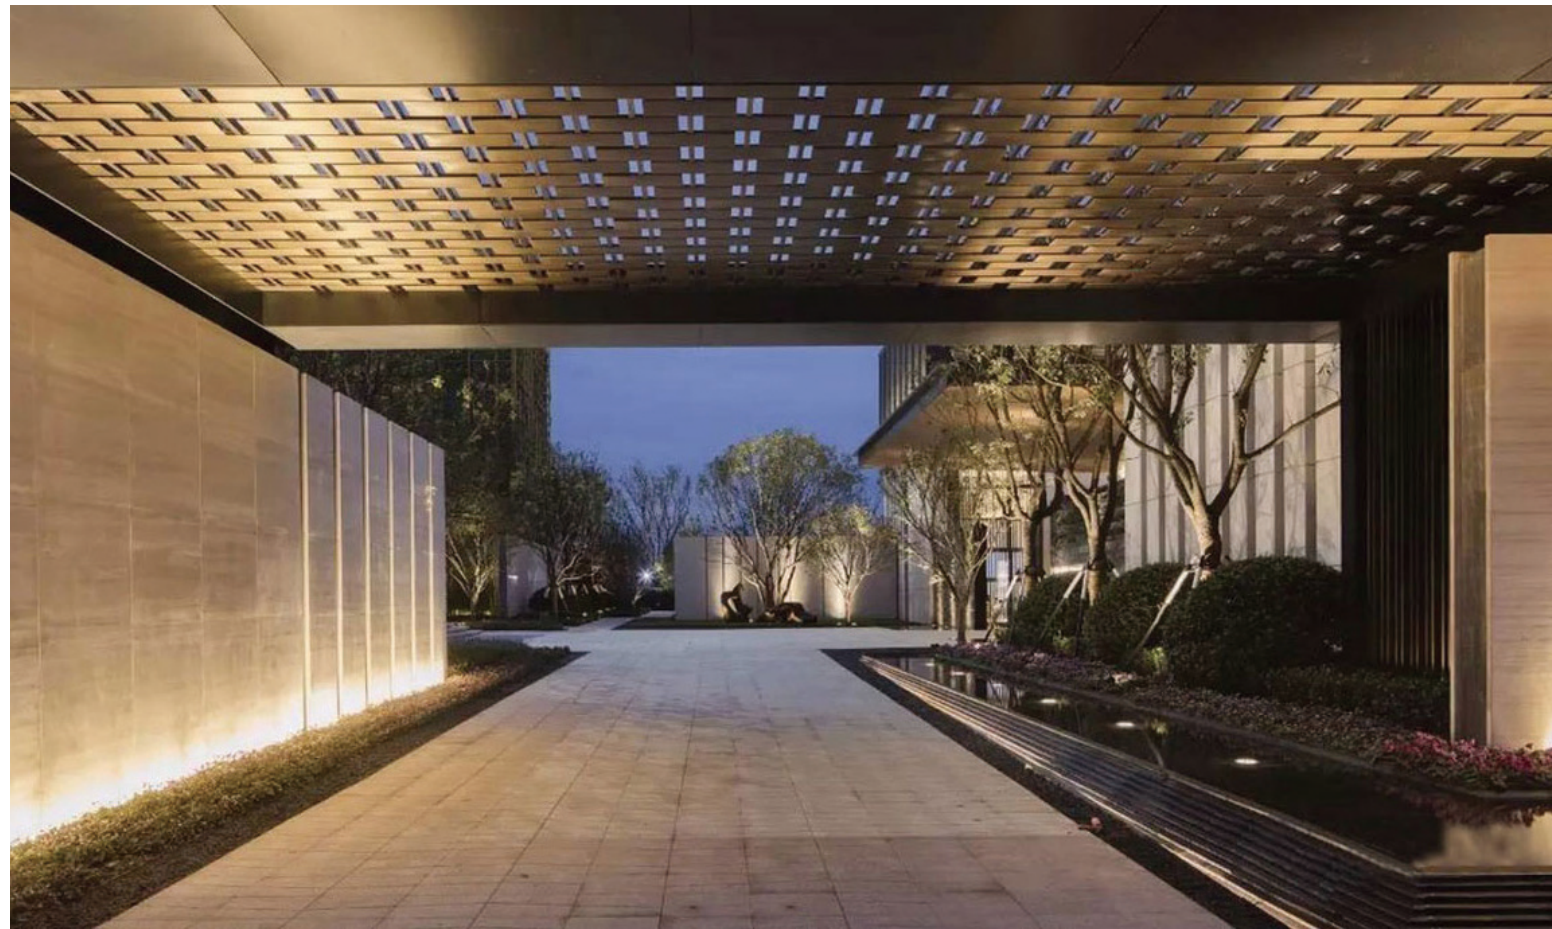

Each set of line strips has a maximum length of 5 meters  
Please ensure that it is carried out in case of power failure during installation and maintenance.

	OLA3818S	OLA3809S	OLA3806S
CRI 90	LED 24W /1800lm	LED 12W /900lm	LED 8W /600lm
2700K	LENS Δ 8° 12° 20° 30° 45° 10x60°	LENS Δ 8° 12° 20° 30° 45° 10x60°	LENS Δ 8° 12° 20° 30° 45° 10x60°
3000K	ADJUSTABLE 0-90°	ADJUSTABLE 0-90°	ADJUSTABLE 0-90°
4000K	DC 24V	DC 24V	DC 24V
5000K	IP65	IP65	IP65
RGB	NON DIM, TRAC, 1-10V, DALI	NON DIM, TRAC, 1-10V, DALI	NON DIM, TRAC, 1-10V, DALI