

L'ARTE *AL* LUCE®



PRODUCT CULTURE



# PRODUCT INDEX



PINE NEEDLE DA25  
001-004



UNBOUNDED DA35  
005-010




STEALTHSHINE DA34  
011-014



MORNING DEW DA91  
015-018



RAIN CURTAIN DA92  
019-022

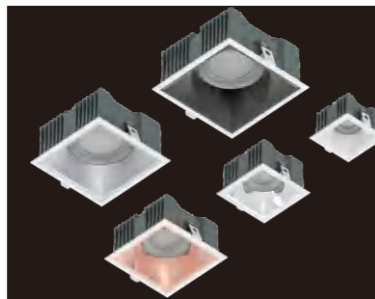

FANG TONG DA49  
023-032



MONOLOGUE DA28  
033-036



CORE AWN DB84  
037-042



REVERBERATE DA36  
043-056



MICROFLAME DA39  
057-058



# DA25 PINE NEEDLE



## SMALL HOLE LIGHT MORE ANTI-GLARE

DA25 series simple design style, with all aluminum die-cast lamp body,  
Highlight product quality and texture from the details;  
Small aperture, narrow light Angle, more accurate light control, more accurate and delicate lighting,  
Beam Angle > 60° , UGR < 6, very anti-glare,  
To maximize the quiet and elegant space lighting atmosphere.  
After the lamp shade face ring is installed, it is integrated with the ceiling.  
TO meet the different design styles,  
Suit to professional grade, decorative grade high demand lighting."





DA2501NR





LED brand: Luminus  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size:  $\Phi 40 \times 61$

Material: aluminum  
 Power: 5W  
 Voltage & Current: 36V  
 Cutout:  $\Phi 35$

Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 180LM

DA2502NR





LED brand: Luminus  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size:  $\Phi 50 \times 63$

Material: aluminum  
 Power: 7W  
 Voltage & Current: 36V  
 Cutout:  $\Phi 45$

Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 230LM

DA2503NR





LED brand: Luminus  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size:  $\Phi 60 \times 71$

Material: aluminum  
 Power: 9W  
 Voltage & Current: 36V  
 Cutout:  $\Phi 55$

Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 260LM


DA2504NR



LED brand: Luminus  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size:  $\Phi 70 \times 71$

Material: aluminum  
 Power: 12W  
 Voltage & Current: 36V  
 Cutout:  $\Phi 65$

Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 390LM



black white

# DA35 UNBOUNDED

面罩有不同套色和电镀色

**MASKS ARE AVAILABLE IN DIFFERENT  
SETS OF COLORS AND PLATING COLORS**



DA35 series, minimalist smooth design, rigid and soft interpretation of pure beauty.  
There are different sets of colors and plating colors to choose from to meet the needs of different Spaces.  
Pure light and precise light control create a quiet space atmosphere.







DA3502NR-A





LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size:  $\Phi 61 \times 67$

Material: aluminum  
 Power: 7W  
 Voltage & Current: 36V  
 Cutout:  $\Phi 55$

Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 650LM


DA3503NR-A



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size:  $\Phi 80 \times 72$

Material: aluminum  
 Power: 12W  
 Voltage & Current: 36V  
 Cutout:  $\Phi 75$

Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 950LM



# DA34 HIDE SHINE



## RADIATOR VERY RICH COLOR

DA34 series, small size, delicate process, thickened aviation aluminum heat faster and more durable.  
The radiator has different color options to meet the needs of different design styles.  
Excellent lighting quality, ultimate anti-glare design





DA3403NR-A





LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ84x44

Material: aluminum  
 Power: 12W  
 Voltage & Current: 36V  
 Cutout: Φ75

Beam angle: 24°/36°/50°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 950LM



DA3303NR-A



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ80x55

Material: aluminum  
 Power: 12W  
 Voltage & Current: 36V  
 Cutout: Φ75

Beam angle: 24°/36°/50°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 950LM

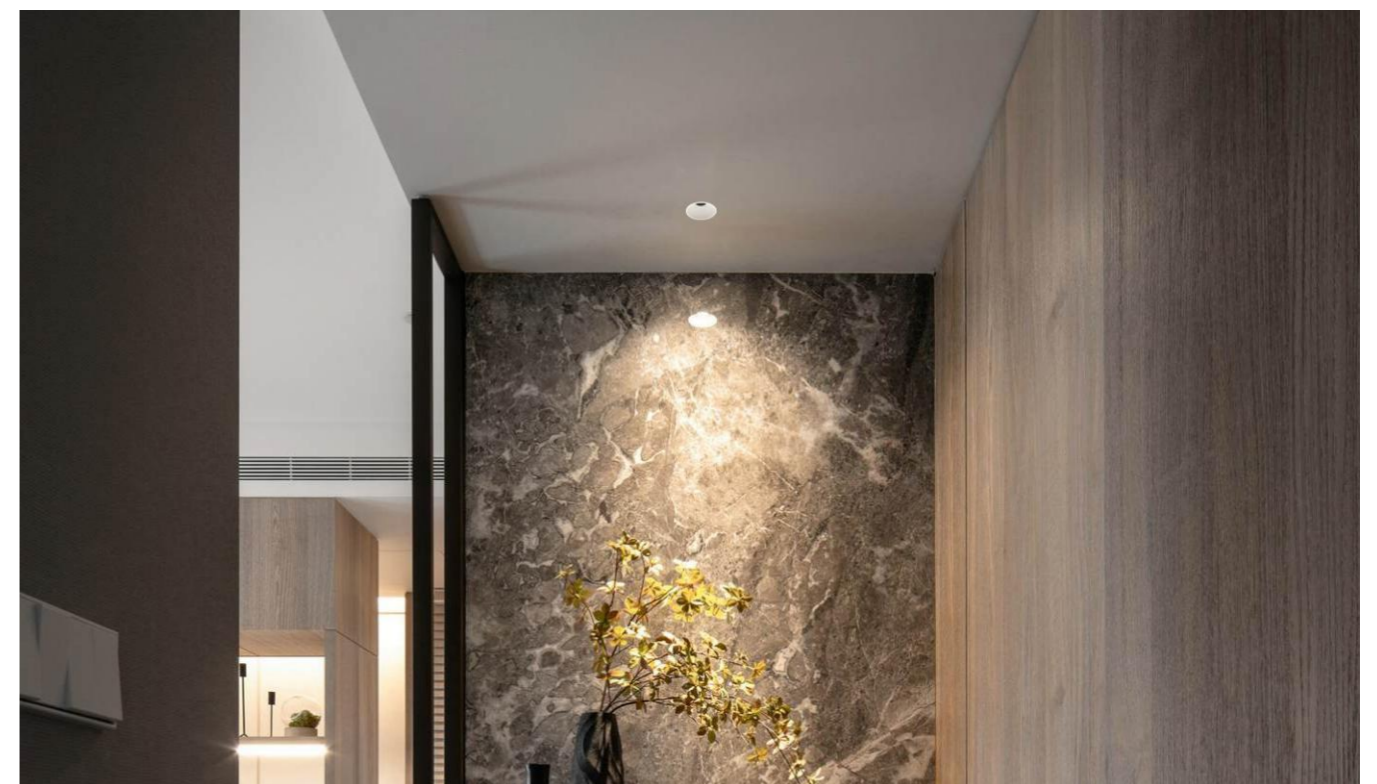

# DA91 MORNING DEW

## WATERPROOF RECESSED SPOT LIGHT

DA91 series, exquisite craft, simple style atmosphere, IP54 design,

Suitable for bathroom, bathroom, kitchen and other places with high humidity,

Excellent light efficiency, 15° /24° /36° /50° , many angle options,

Suitable for professional grade decoration grade needs.





# IP54





DA9102NR



LED brand: OSRAM

CCT: 2700K/3000K/4000K

CRI: Ra > 90

Size: 62x58

Material: aluminum

Power: 7W

Voltage & Current: 36V

Cutout: 55



Beam angle: 15°/24°/36°/50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 400LM

DA9103NR



LED brand: OSRAM

CCT: 2700K/3000K/4000K

CRI: Ra > 90

Size: 83x62

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: 75



Beam angle: 15°/24°/36°/50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 800LM

DA9104NR



LED brand: OSRAM

CCT: 2700K/3000K/4000K

CRI: Ra > 90

Size: 105x74

Material: aluminum

Power: 18W

Voltage & Current: 36V

Cutout: 95

Beam angle: 15°/24°/36°/50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 1200LM



# DA92 RAIN C CURTAIN

This series exquisite craft, simple style atmosphere, IP54 waterproof design,  
Suitable for bathroom, bathroom, kitchen and other places with high humidity,  
Excellent light efficiency, 15° /24° /36° /50° , many angle options,  
Suitable for professional grade decoration grade needs






IP54  
WATERPROOF  
RECESSED SPOT LIGHT



# RAIN CURTAIN

WATERPROOF RECESSED SPOT LIGHT IP54

DA9203NR



LED brand: EPISTAR  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ83x65

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: Φ75




Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 1200LM

DA9204NR



LED brand: EPISTAR  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ103x70

Material: aluminum

Power: 20W

Voltage & Current: 36V

Cutout: Φ95



Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 2000LM

DA9205NR



LED brand: EPISTAR  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ132x75

Material: aluminum

Power: 30W

Voltage & Current: 36V

Cutout: Φ125

Beam angle: 50°




Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 2900LM



DA9206NR



LED brand: EPISTAR  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ160x80

Material: aluminum

Power: 36W

Voltage & Current: 36V

Cutout: Φ150




Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 3900LM

DA9207NR



LED brand: EPISTAR  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ180x85

Material: aluminum

Power: 45W

Voltage & Current: 36V


Cutout: Φ170

Beam angle: 50°


Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 5000LM

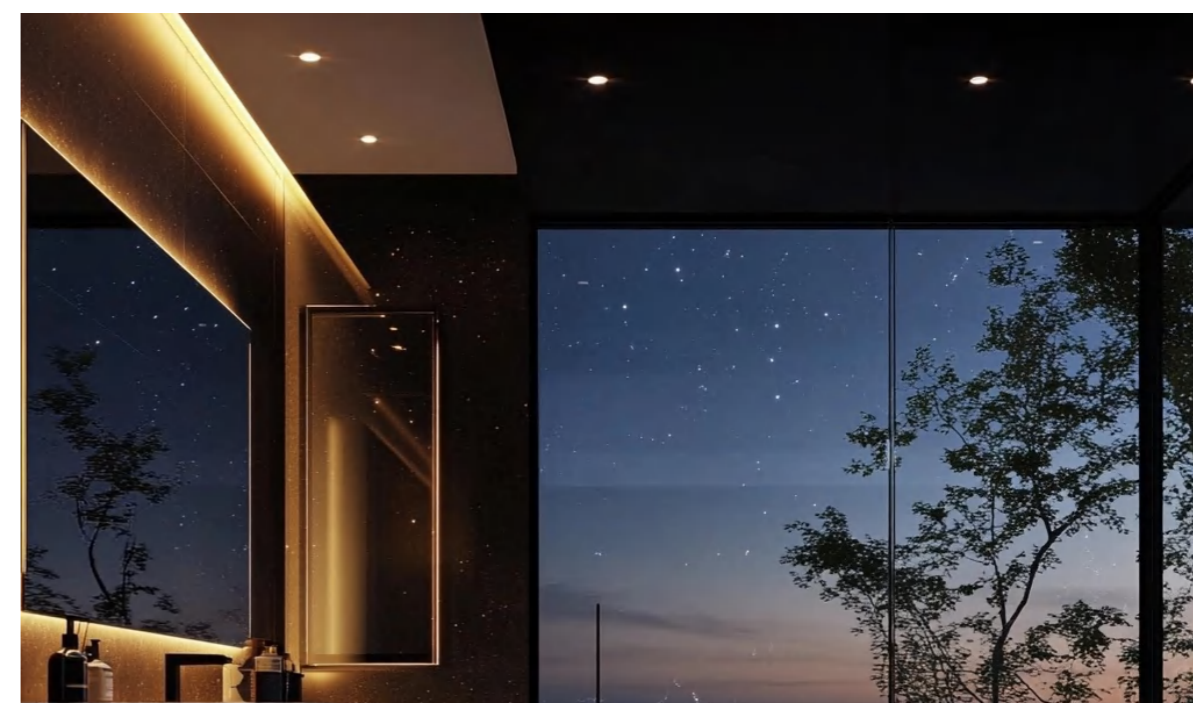

WATERPROOF  
RECESSED SPOT LIGHT  
IP54


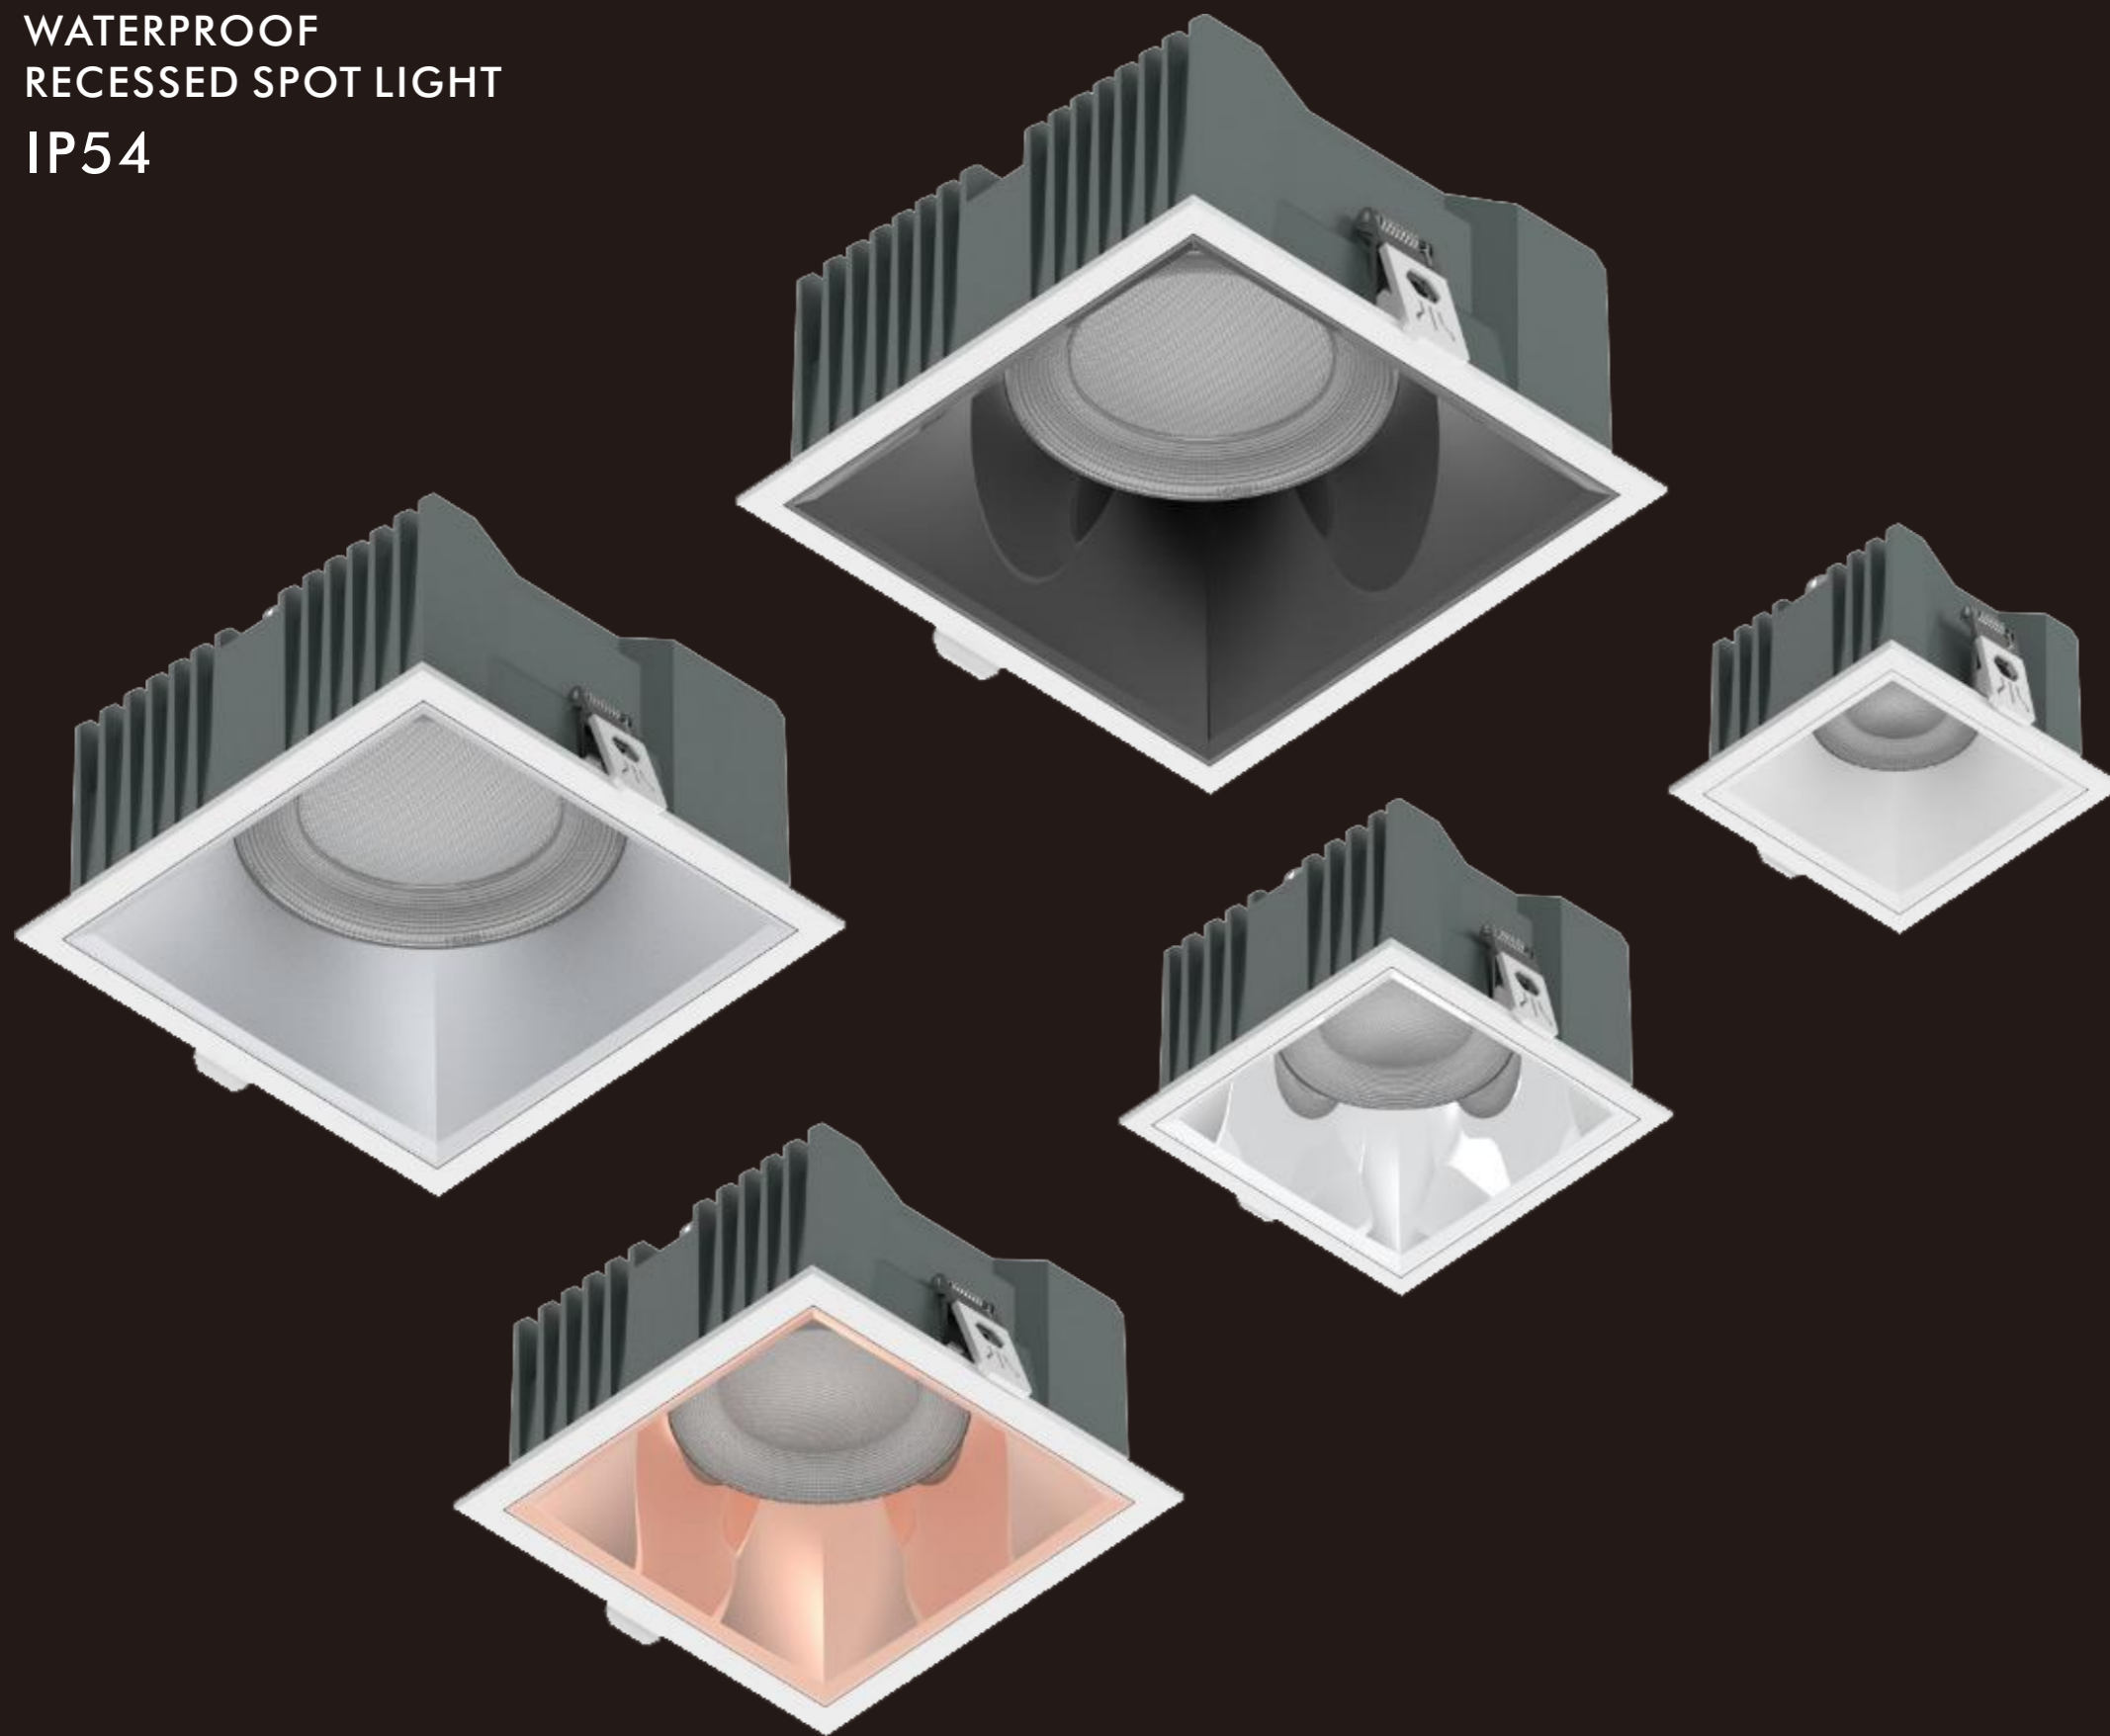


## DA49 FANG TONG

This series stable and dignified, but simple and elegant. Multiple color options, perfect combination of lighting and decoration, 50° , Just the right wide Angle for softer and more uniform lighting.



DA4903NS



LED brand: EPISTAR

CCT: 2700K/3000K/4000K

CRI: Ra > 90

Size: 90x90x60

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: 75x75



Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 1200LM

DA4904NS



LED brand: EPISTAR

CCT: 2700K/3000K/4000K

CRI: Ra > 90

Size: 110x110x70

Material: aluminum

Power: 20W

Voltage & Current: 36V

Cutout: 95x95



Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 2000LM

DA4905NS



LED brand: EPISTAR

CCT: 2700K/3000K/4000K

CRI: Ra > 90

Size: 145x145x75

Material: aluminum

Power: 30W

Voltage & Current: 36V

Cutout: 125x125


Beam angle: 50°

Mains voltage: 220-240V 50/60Hz



Description: Downlight

Luminousflux: 2900LM



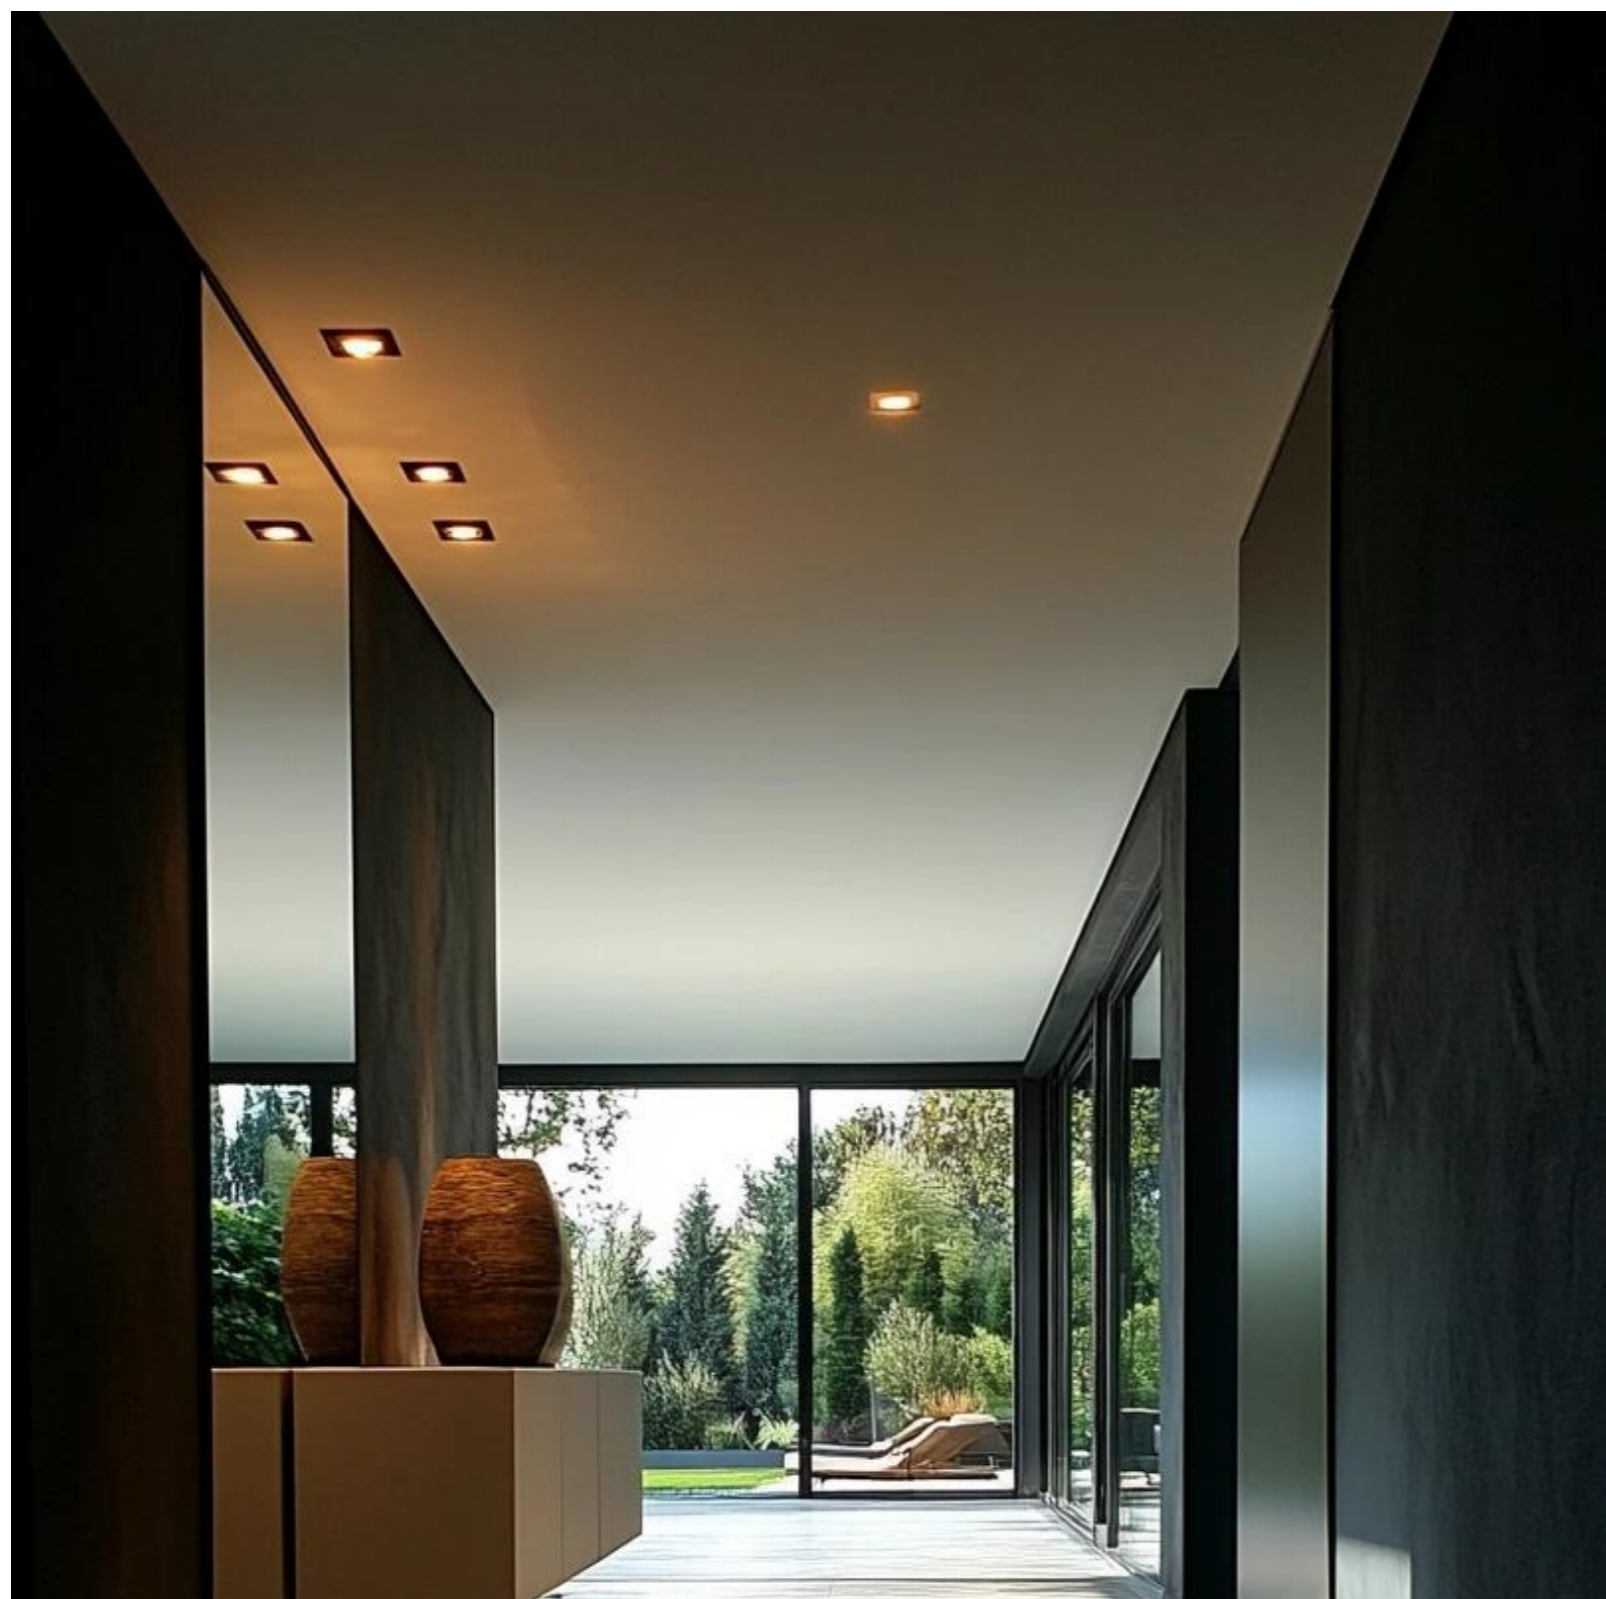

DA4906NS



LED brand: EPISTAR

CCT: 2700K/3000K/4000K

CRI: Ra>90

Size: 165x165x85

Material: aluminum

Power: 36W

Voltage & Current: 36V

Cutout: 145x145



Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 3900LM

DA4907NS



LED brand: EPISTAR

CCT: 2700K/3000K/4000K

CRI: Ra>90

Size: 185x185x92

Material: aluminum

Power: 45W

Voltage & Current: 36V

Cutout: 165x165

Beam angle: 50°

Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 5000LM


- Matt black
- Matt white
- Matt silver
- Gun black
- Shiny silver







## DA49 FANG TONG

This series stable and dignified, but simple and elegant. Multiple color options, perfect combination of lighting and decoration, 50° , Just the right wide Angle for softer and more uniform lighting.

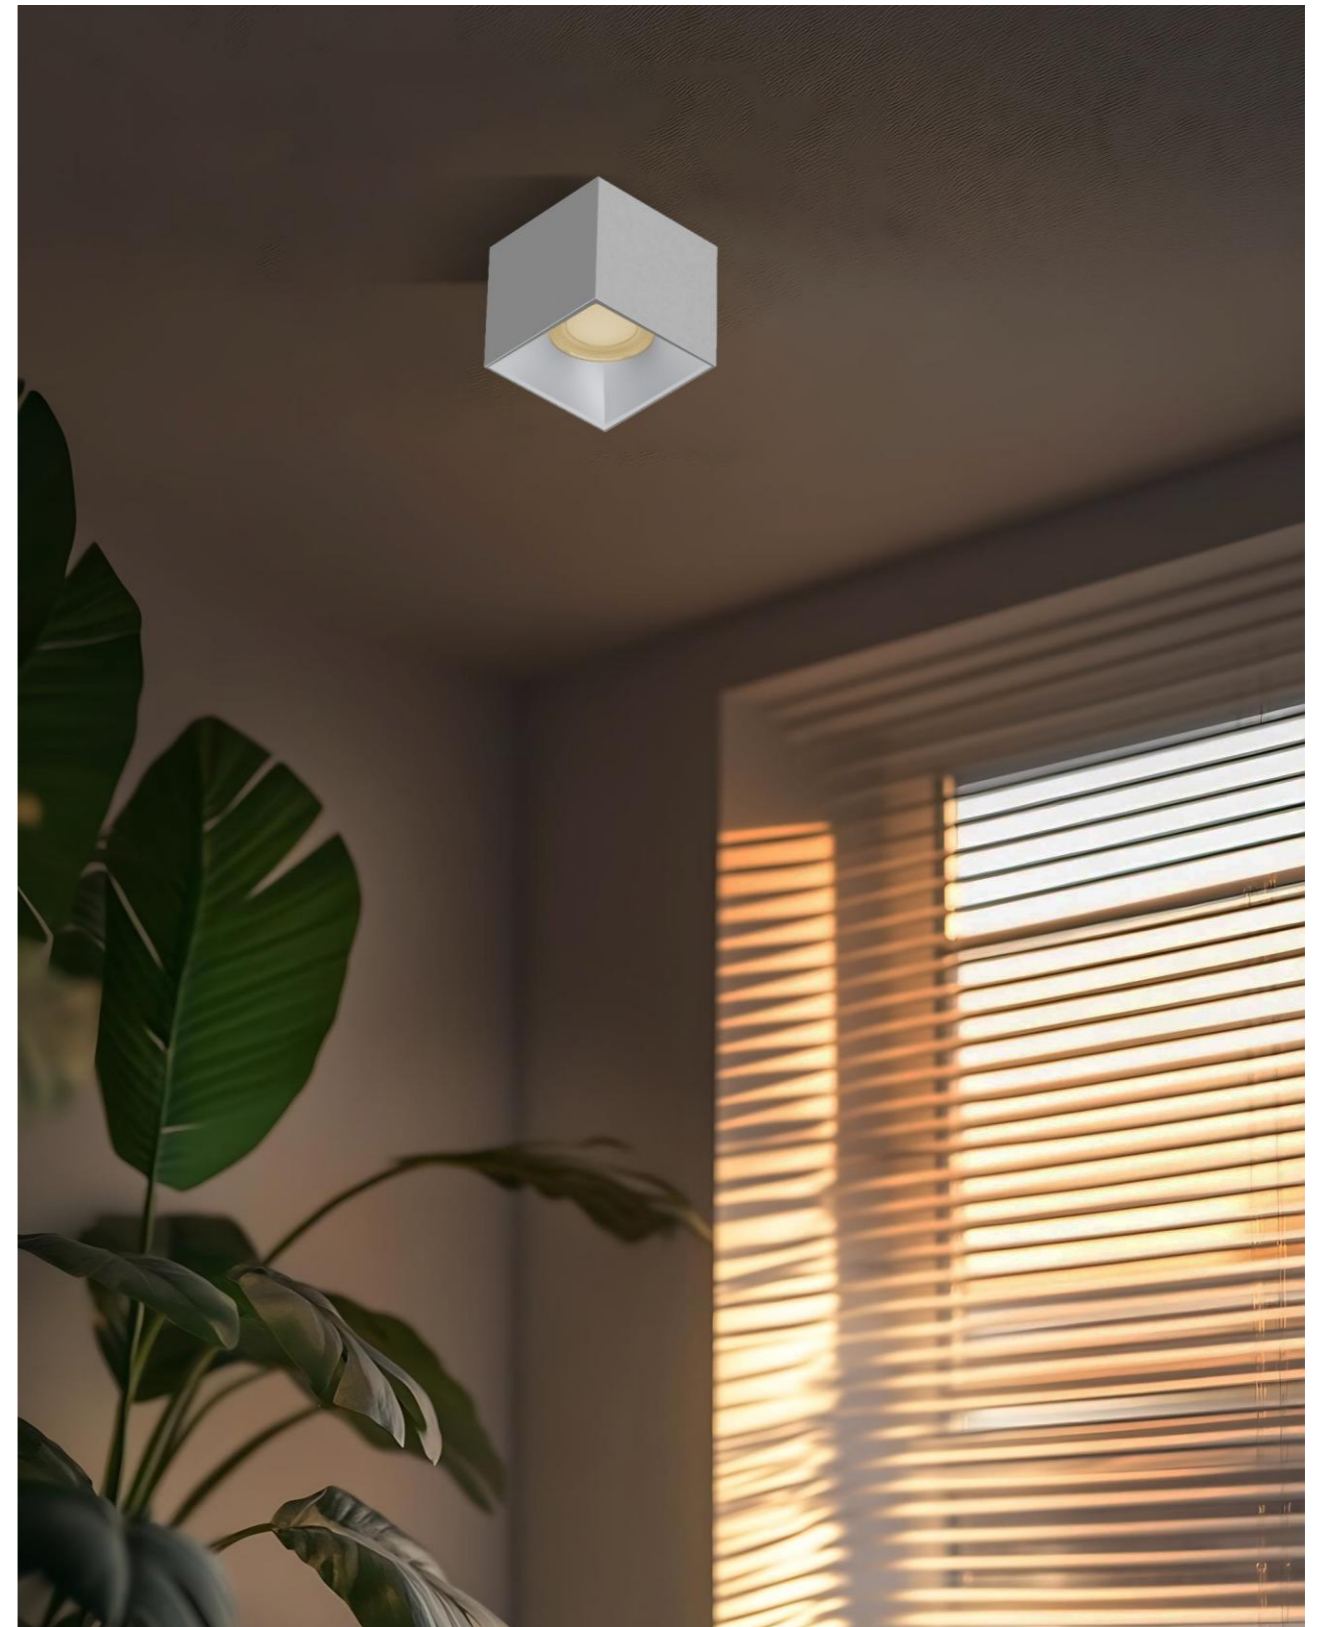

WA4903NS



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
80x80x83

Material:  
aluminum

Power:  
12W

Voltage & Current:  
36V

Cutout:  
/




Beam angle:  
50°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
1200LM

WA4906NS



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
150x150x136

Material:  
aluminum

Power:  
36W

Voltage & Current:  
36V

Cutout:  
\




Beam angle:  
50°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
3900LM

WA4904NS



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
100x100x96

Material:  
aluminum

Power:  
20W

Voltage & Current:  
36V

Cutout:  
/




Beam angle:  
50°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
2000LM

WA4907NS



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
170x170x156

Material:  
aluminum

Power:  
45W

Voltage & Current:  
36V

Cutout:  
/




Beam angle:  
50°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
5000LM

WA4905NS



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
130x130x96

Material:  
aluminum

Power:  
30W

Voltage & Current:  
36V

Cutout:  
/

Beam angle:  
50°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
2900LM




# DA28 MONOLOGUE

Take light as a poem, let the lamp into the darkness,  
leaving only a bunch of "self-expression"  
The design is to make the lamp disappear and make the  
light become the monologue of the space.





DA2800DR



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra > 90  
 Size: Φ51x79

Material: aluminum  
 Power: 5W  
 Voltage & Current: 36V  
 Cutout: Φ45  
 Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 300LM



DA2801DR



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra > 90  
 Size: Φ61x80

Material: aluminum  
 Power: 7W  
 Voltage & Current: 36V  
 Cutout: Φ55  
 Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 400LM



DA2802DR



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra > 90  
 Size: Φ71x81

Material: aluminum  
 Power: 9W  
 Voltage & Current: 36V  
 Cutout: Φ65  
 Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 600LM

DA2803DR





LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra > 90  
 Size: Φ82x93

Material: aluminum  
 Power: 12W  
 Voltage & Current: 36V  
 Cutout: Φ75  
 Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 800LM





DA2804DR



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra > 90  
 Size: Φ92x97


Material: aluminum  
 Power: 15W  
 Voltage & Current: 36V  
 Cutout: Φ85  
 Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 930LM

DA2805DR



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra > 90  
 Size: Φ103x105

Material: aluminum  
 Power: 20W  
 Voltage & Current: 36V  
 Cutout: Φ95  
 Beam angle: 24°/36°  
 Mains voltage: 220-240V 50/60Hz  
 Description: Downlight  
 Luminousflux: 1400LM

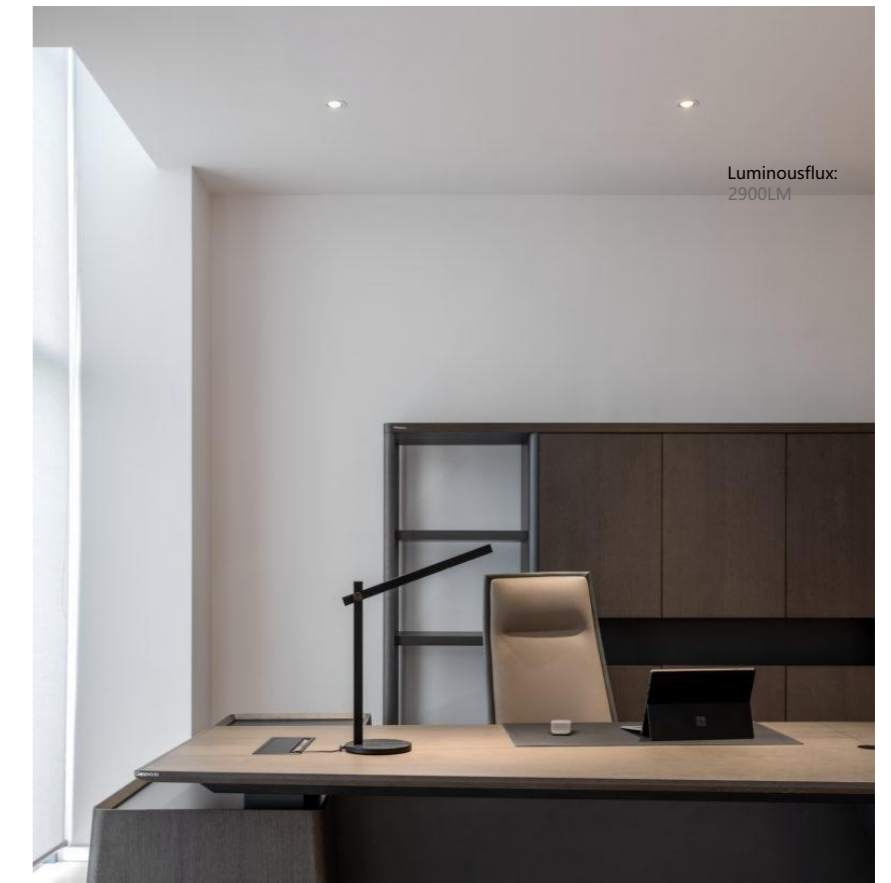

# DB84 XINMANG

DB84 series breaks the limits of traditional LED luminescence to achieve high lumen.


Microcore hides rays of light, illuminates every corner  
"worth seeing"

With the chip as the core, let the light penetrate the dark corner and be the illuminator in the space.





DB8403NR



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ89x45

Material:  
aluminum

Power:  
12W

Voltage & Current:  
36V

Cutout:  
Φ75



Beam angle:  
55°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
1300LM

DB8404NR



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ110x48

Material:  
aluminum

Power:  
20W

Voltage & Current:  
36V

Cutout:  
Φ95



Beam angle:  
70°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
2300LM

DB8405NR



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ140x52

Material:  
aluminum

Power:  
30W

Voltage & Current:  
36V

Cutout:  
Φ125

Beam angle:  
80°

Mains voltage:  
220-240V 50/60Hz



Description:  
Downlight

Luminousflux:  
3300LM



Matt black Matt white Gun black Shiny silver

DB8406NR



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ165x52

Material:  
aluminum

Power:  
35W

Voltage & Current:  
36V

Cutout:  
Φ145



Beam angle:  
85°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
4000LM

DB8407NR



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ185x57

Material:  
aluminum

Power:  
40W

Voltage & Current:  
36V

Cutout:  
Φ165



Beam angle:  
90°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
5000LM

DB8408NR



LED brand:  
EPISTAR

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ235x59

Material:  
aluminum

Power:  
45W

Voltage & Current:  
36V

Cutout:  
Φ200

Beam angle:  
90°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
5900LM



Matt black Matt white Gun black Shiny silver



## DA36 REVERBERATE

Patterns of light "reverberate" through space

As a dialogue between space and light, "reverberation" is born : not a single light,

It is a two-way resonance between light and architecture, people and environment.

Da36 series products are very rich, simple fashion style, designed different kinds of light,



3.5W to 12W power, suitable for different lighting needs, mask square, round,

The lamp design suitable for different levels. Meet the high requirements of the lighting scene.



DA3600NR-A

● black ○ white ◐ white+black



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
Φ41x67

Material:  
aluminum

Power:  
3.5W

Voltage & Current:  
36V

Cutout:  
Φ35

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
230LM

DA3600NR-B

● black ○ white ● Plating color



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
Φ41x67

Material:  
aluminum

Power:  
3.5W

Voltage & Current:  
36V

Cutout:  
Φ35

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
230LM

DA3600NR-C

● black ○ white ◐ white+black



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
Φ41x67

Material:  
aluminum

Power:  
3.5W

Voltage & Current:  
36V

Cutout:  
Φ35

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
200LM

DA3600NR-D

● black ○ white ◐ white+black



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
Φ41x67

Material:  
aluminum

Power:  
3.5W

Voltage & Current:  
36V

Cutout:  
Φ35

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
180LM



DA3601NR-A



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ51x70

Material:  
aluminum

Power:  
5W

Voltage & Current:  
36V

Cutout:  
Φ45

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
350LM



DA3601NR-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ51x70

Material:  
aluminum

Power:  
5W

Voltage & Current:  
36V

Cutout:  
Φ45

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
350LM



DA3601NR-C



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ51x70

Material:  
aluminum

Power:  
5W

Voltage & Current:  
36V

Cutout:  
Φ45

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
280LM



DA3601NR-D



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ51x70

Material:  
aluminum

Power:  
5W

Voltage & Current:  
36V

Cutout:  
Φ45

Beam angle:  
24°/36°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight



Luminousflux:  
230LM



# REVERBERATE



DA3602NR-A



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ60X56

Material:  
aluminum

Power:  
7W

Voltage & Current:  
36V

Cutout:  
Φ55

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
480LM



DA3602NR-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ60X56

Material:  
aluminum

Power:  
7W

Voltage & Current:  
36V

Cutout:  
Φ55

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
480LM



DA3602NR-C



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ60X56

Material:  
aluminum

Power:  
7W

Voltage & Current:  
36V

Cutout:  
Φ55

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
230LM



DA3602NR-D



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra > 90

Size:  
Φ60X56

Material:  
aluminum

Power:  
7W

Voltage & Current:  
36V

Cutout:  
Φ55

Beam angle:  
24°/36°

Mains voltage:  
220-240V 50/60Hz



Description:  
Downlight

Luminousflux:  
230LM



DA3603NR-E

● black ○ white ◐ white+black



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ80x62

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: Φ75

Beam angle: 24°/36°

Mains voltage: 220-240V 50/60Hz



Description: Downlight

Luminousflux: 900LM



DA3603NR-A

● black ○ white ◐ white+black



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ80x62

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: Φ75

Beam angle: 24°/36°



Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 900LM

DA3603NR-B

● black ○ white ● Plating color



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ80x62

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: Φ75

Beam angle: 24°/36°



Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 900LM

DA3603NR-C

● black ○ white ◐ white+black



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ80x62

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: Φ75

Beam angle: 24°/36°



Mains voltage: 220-240V 50/60Hz

Description: Downlight

Luminousflux: 700LM

DA3603NR-D

● black ○ white ◐ white+black



LED brand: OSRAM  
 CCT: 2700K/3000K/4000K  
 CRI: Ra>90  
 Size: Φ80x62

Material: aluminum

Power: 12W

Voltage & Current: 36V

Cutout: Φ75

Beam angle: 24°/36°



Mains voltage: 220-240V 50/60Hz

Description: Downlight



Luminousflux: 700LM



REVERBERATE

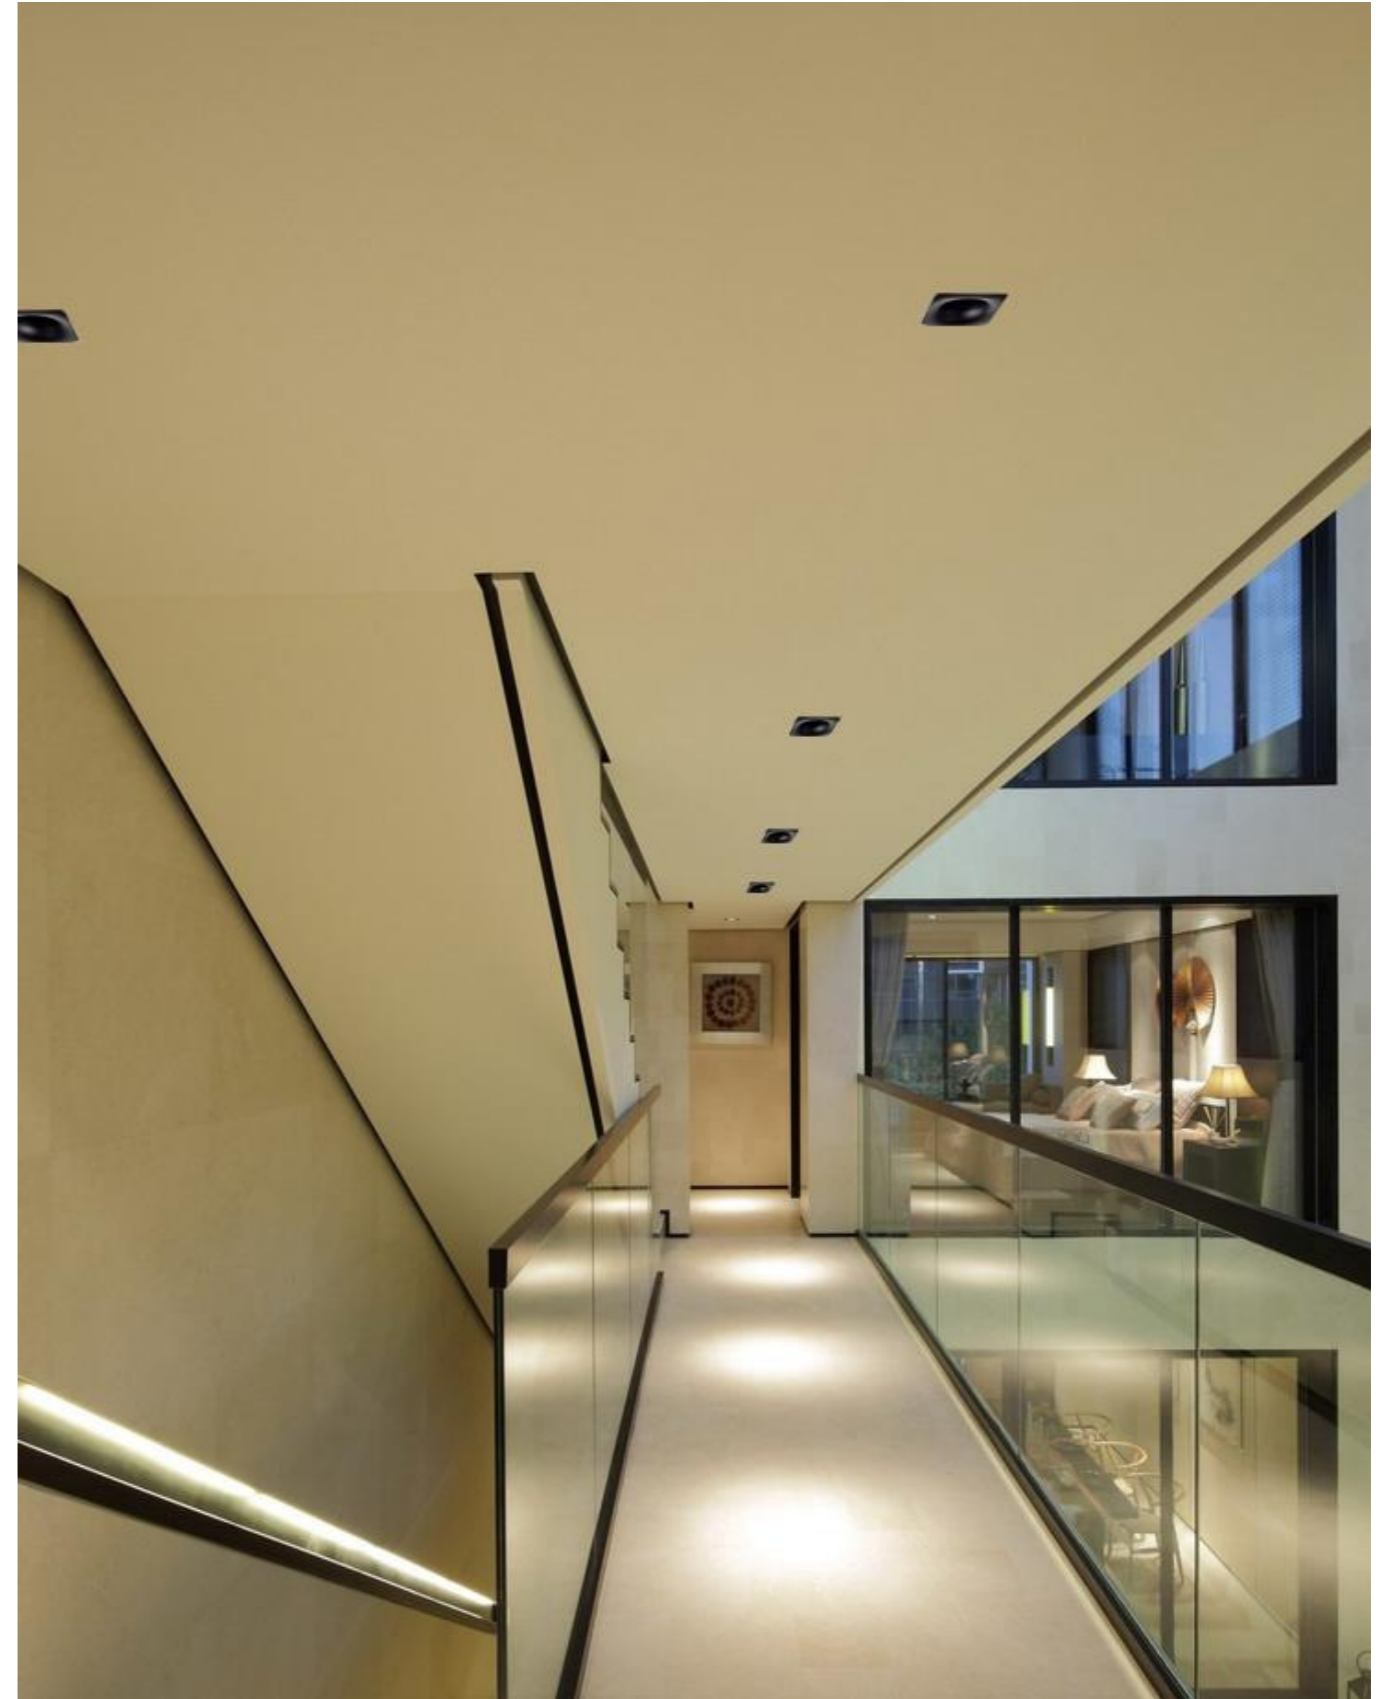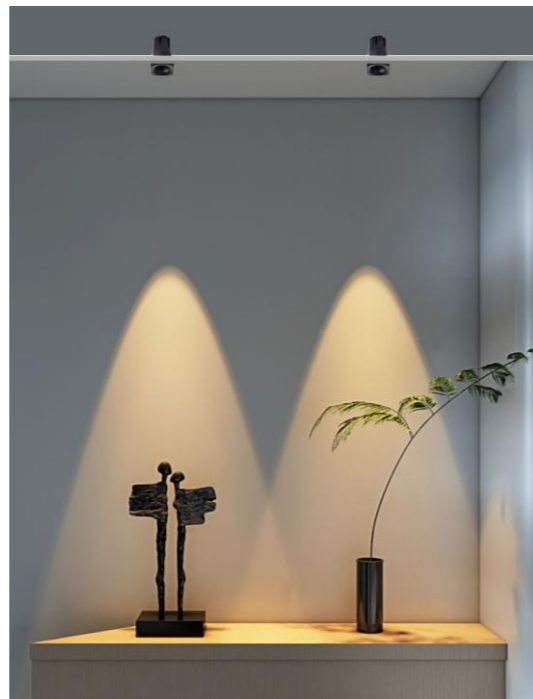

DA3600NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
41x41x69

Material:  
aluminum

Power:  
3.5W

Voltage & Current:  
36V

Cutout:  
Φ35

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
230LM



DA3602NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
62x62x56

Material:  
aluminum

Power:  
7W

Voltage & Current:  
36V

Cutout:  
Φ55

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
450LM



DA3620NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
41x78x69

Material:  
aluminum

Power:  
3.5Wx2

Voltage & Current:  
36V

Cutout:  
35°68

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
230LM\*2



DA3622NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
62x118x56

Material:  
aluminum

Power:  
7Wx2

Voltage & Current:  
36V

Cutout:  
55x103

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
450LM\*2



DA3601NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
51x51x71

Material:  
aluminum

Power:  
5W

Voltage & Current:  
36V

Cutout:  
Φ45

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
350LM



DA3603NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
88x88x65

Material:  
aluminum

Power:  
12W

Voltage & Current:  
36V

Cutout:  
Φ75

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
900LM



DA3621NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
51x98x71

Material:  
aluminum

Power:  
5Wx2

Voltage & Current:  
36V

Cutout:  
45x88

Beam angle:  
24°/36°



Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
350LM\*2



DA3623NS-B



LED brand:  
OSRAM

CCT:  
2700K/3000K/4000K

CRI:  
Ra>90

Size:  
62x118x56

Material:  
aluminum

Power:  
12Wx2

Voltage & Current:  
36V


Cutout:  
75x141

Beam angle:  
24°/36°

Mains voltage:  
220-240V 50/60Hz

Description:  
Downlight

Luminousflux:  
900LM\*2





# DA39 MICROFLAME

This series breaking through physical boundaries with technology, Let each light have both power and temperature."

Extremely narrow frame, simple fashion, 12W high power suitable for more space High heat dissipation, more durable lamps.



DA3903NR-A





LED brand: OSRAM  
CCT: 2700K/3000K/4000K  
CRI: Ra > 90  
Size:  $\Phi 82 \times 80$

Material: aluminum  
Power: 12W  
Voltage & Current: 36V  
Cutout:  $\Phi 75$

Beam angle: 24°/36°  
Mains voltage: 220-240V 50/60Hz  
Description: Downlight  
Luminous flux: 820LM



DA3903NS-A



LED brand: OSRAM  
CCT: 2700K/3000K/4000K  
CRI: Ra > 90  
Size: 82x82x80

Material: aluminum  
Power: 12W  
Voltage & Current: 36V  
Cutout: 75x75

Beam angle: 24°/36°  
Mains voltage: 220-240V 50/60Hz  
Description: Downlight  
Luminous flux: 820LM

